
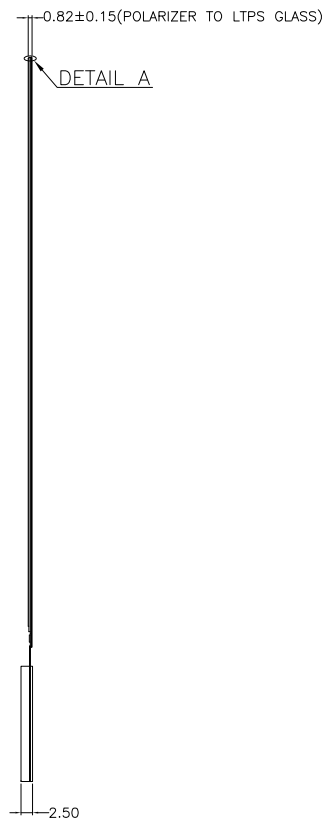
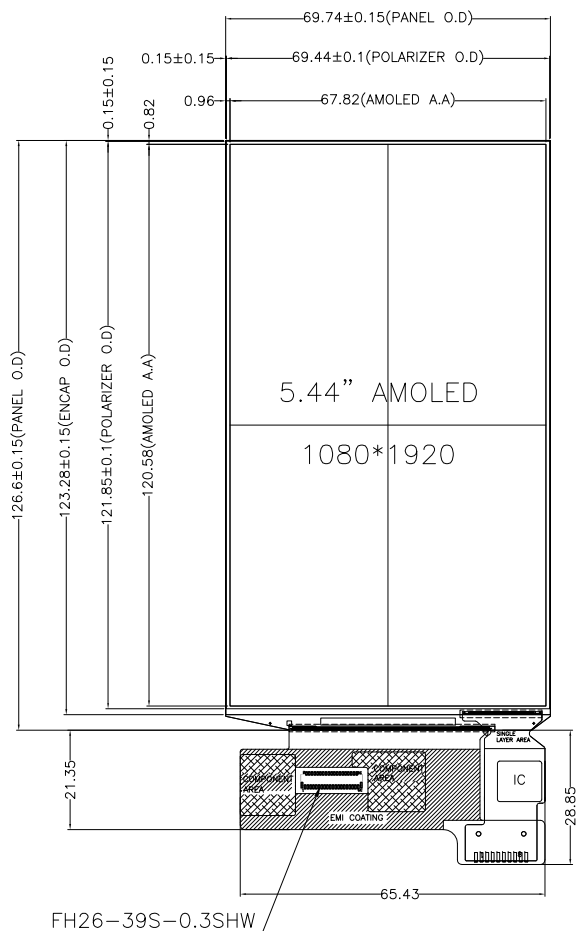


DETAIL A
SCALE 10:1

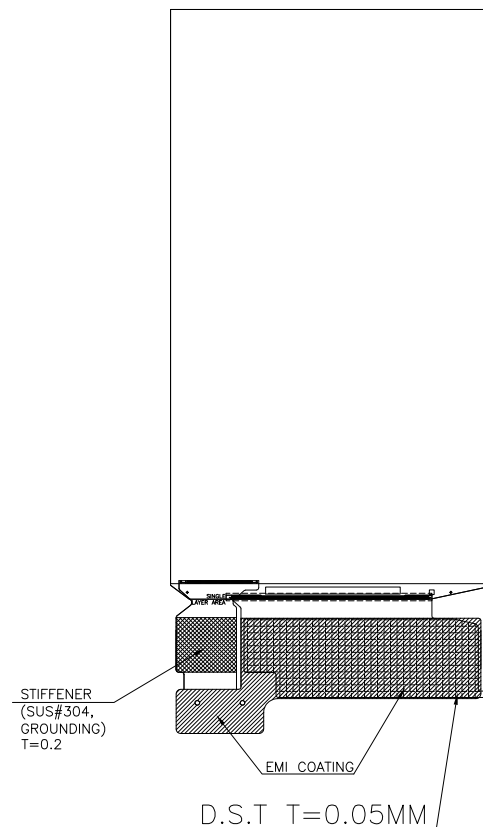

NOTES:

1. DISPLAY TYPE: AMOLED,NORMALLY BLACK.
2. OPERATING VOLTAGE: VCI=3.3V; VDDIO=1.8V; VBAT=2.9~4.5V.
3. VIEWING DIRECTION: FULL VIEWING ANGLE.
4. LCD DRIVER IC: RM67199.
5. CTP DRIVER IC: TBD.
6. OPERATING TEMP.: -20°C ~ 70°C.
7. STORAGE TEMP.: -30°C ~ 80°C.
8. INTERFACE: 4-LANE MIPI.
9. SURFACE LUMINANCE: 350CD/M²(TYP).
10. GENERAL TOLERANCE: ±0.2MM.
11. ROHS COMPLIANT.

PIN DESCRIPTION	
PIN	SYMBOL
1	GND
2	GND
3	GND
4	VBAT
5	VBAT
6	VBAT
7	VBAT
8	VBAT
9	GND
10	VPP
11	NC
12	GND
13	D3P
14	D3N
15	GND
16	D0P
17	D0N
18	GND
19	CLKP
20	CLKN
21	GND
22	D1P
23	D1N
24	GND
25	D2P
26	D2N
27	GND
28	RESX
29	VDDIO
30	VCI
31	TE
32	GND
33	TSP_AVDD
34	TSP_DVDD
35	TSP_SDA
36	TSP_SCL
37	TSP_RESET
38	TSP_ATTN
39	ID



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL	2020.10.27		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0544A0-FCP
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	OLED + CTP MODULE

01	FIRST ISSUE	CAROL	2020.10.27
VER.	REVISED DESCRIPTION	REVISER	DATE