

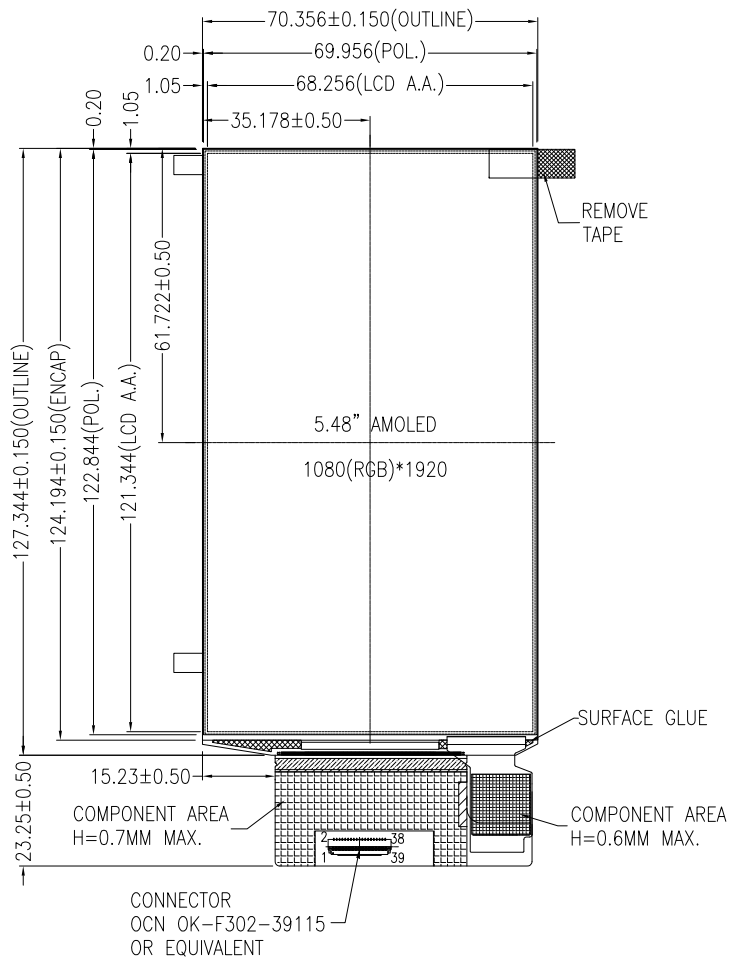




TOTAL 0.825±0.150
(EXCLUDING PROTECTIVE FILM)

DETAIL A

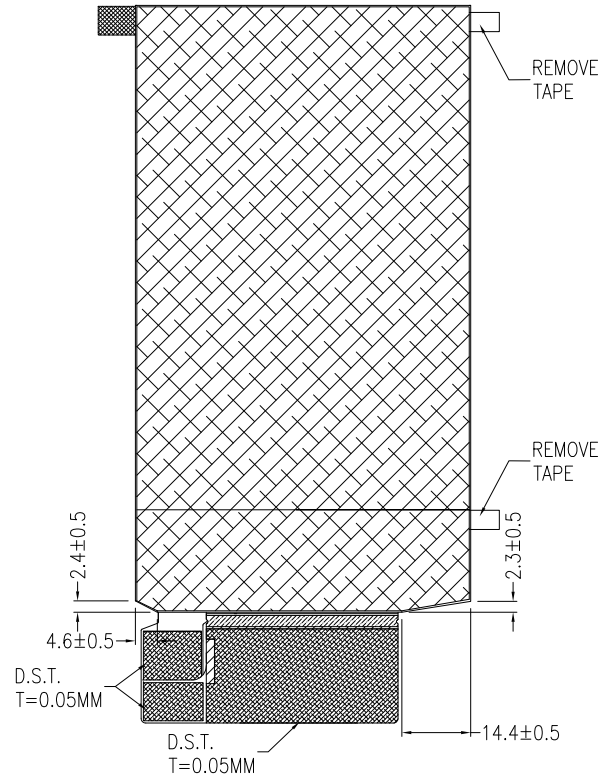

DETAIL A
SCALE: 10:1

PIN ASSIGNMENT			
PIN	SYMBOL	PIN	SYMBOL
1	GND	21	TP_AVDD
2	D0P	22	TP_VDDIO
3	D0N	23	AVDD
4	GND	24	AVDD_EN
5	D1P	25	SWIRE
6	D1N	26	TE
7	GND	27	REST
8	CLKP	28	VDDIO
9	CLKN	29	GND
10	GND	30	ELVSS
11	D2P	31	ELVSS
12	D2N	32	ELVSS
13	GND	33	GND
14	D3P	34	ELVDD
15	D3N	35	ELVDD
16	GND	36	ELVDD
17	TP_INT	37	MTP_PWR
18	TP_RESET	38	VCI
19	TP_SCL	39	DVDD
20	TP_SDA		

NOTES:


1. DISPLAY TYPE: LTPS AMOLED
2. COLOR: 16.7M
3. OPERATING VOLTAGE: VCI=3.0V (TYP.)
4. DRIVER IC: CH13721C, TOUCH IC: FT3519
5. OPERATING TEMP.: -20°C ~ 60°C
6. STORAGE TEMP.: -30°C ~ 70°C
7. INTERFACE: 4-LANE MIPI
8. UNMARKED TOLERANCE: ±0.3MM
9. ROHS COMPLIANT

01	FIRST ISSUE	RITA	2025.02.11	APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	01	SHEET NO.: 1/1	OLED MODULE



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2025.02.11	SCALE : 1/1	MODULE P/N:	MI0548B0-FCP
CHECKED BY:			UNIT: mm	DESCRIPTION:	OLED MODULE

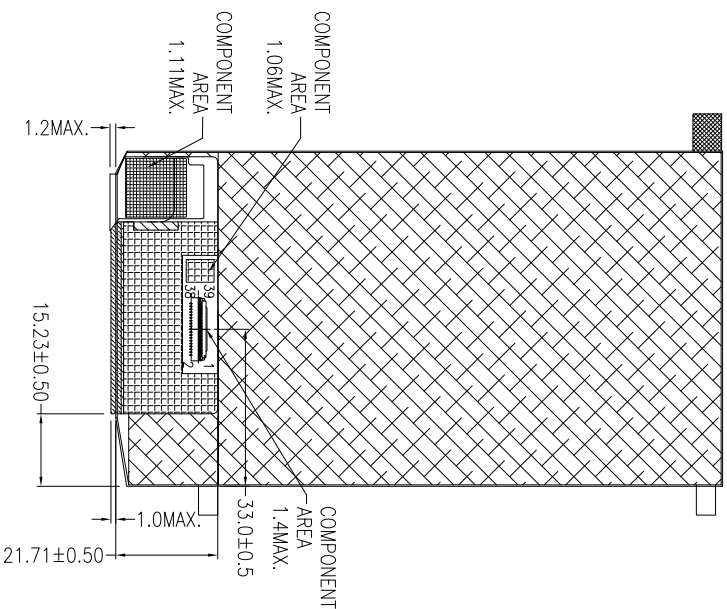

FPC BENDING DIAGRAM
FOR REFERENCE ONLY

 MULTI-INNO TECHNOLOGY CO., LTD.				DRAWN BY: RITA		2025.02.11		MODULE P/N: M0548B0-FCP	
				CHECKED BY:		SCALE : 1/1		DESCRIPTION:	
				APPROVED BY:		UNIT: mm			
VER. REVISED DESCRIPTION				REVISER		DATE		SHEET NO.: 1/1	
01 FIRST ISSUE				RITA		2025.02.11		01	