
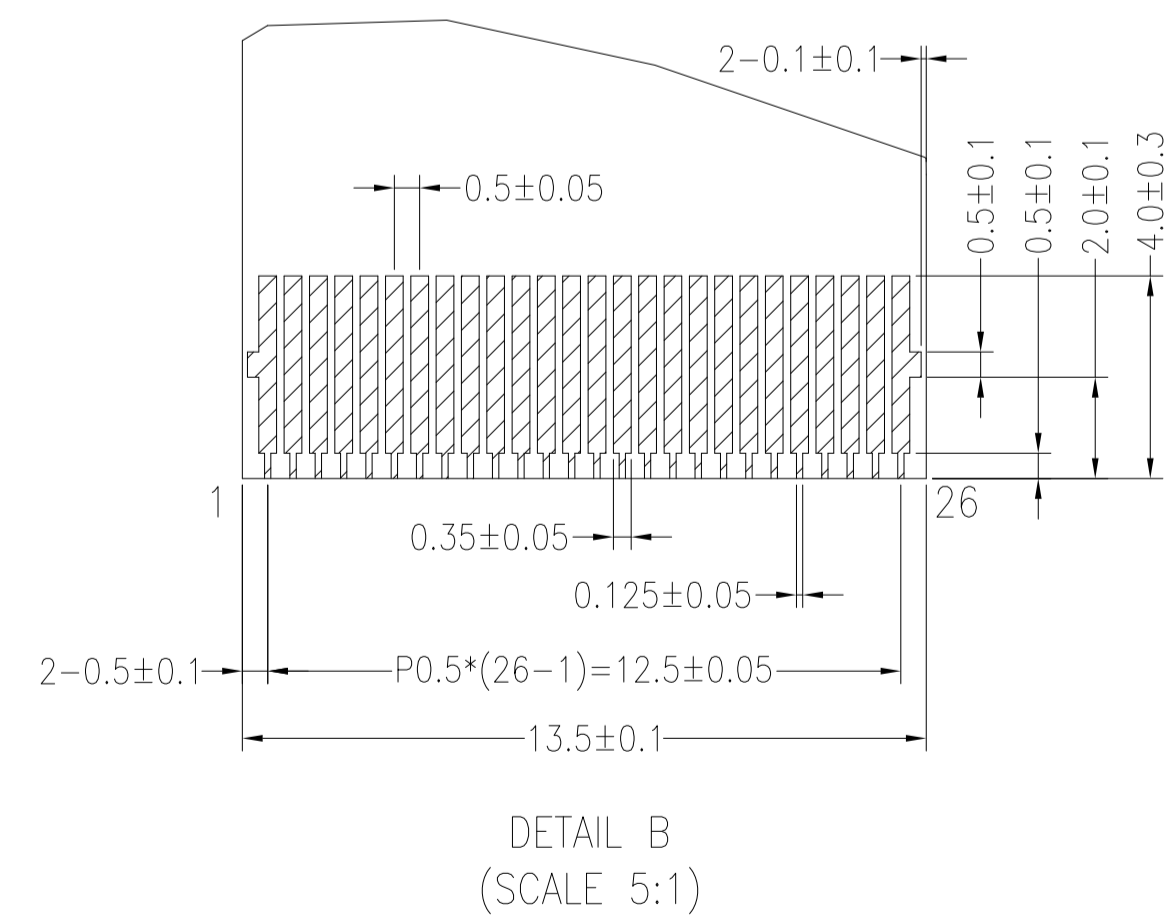
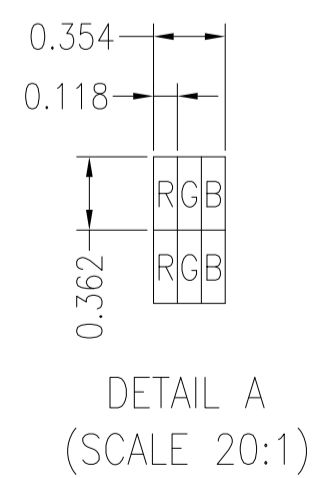
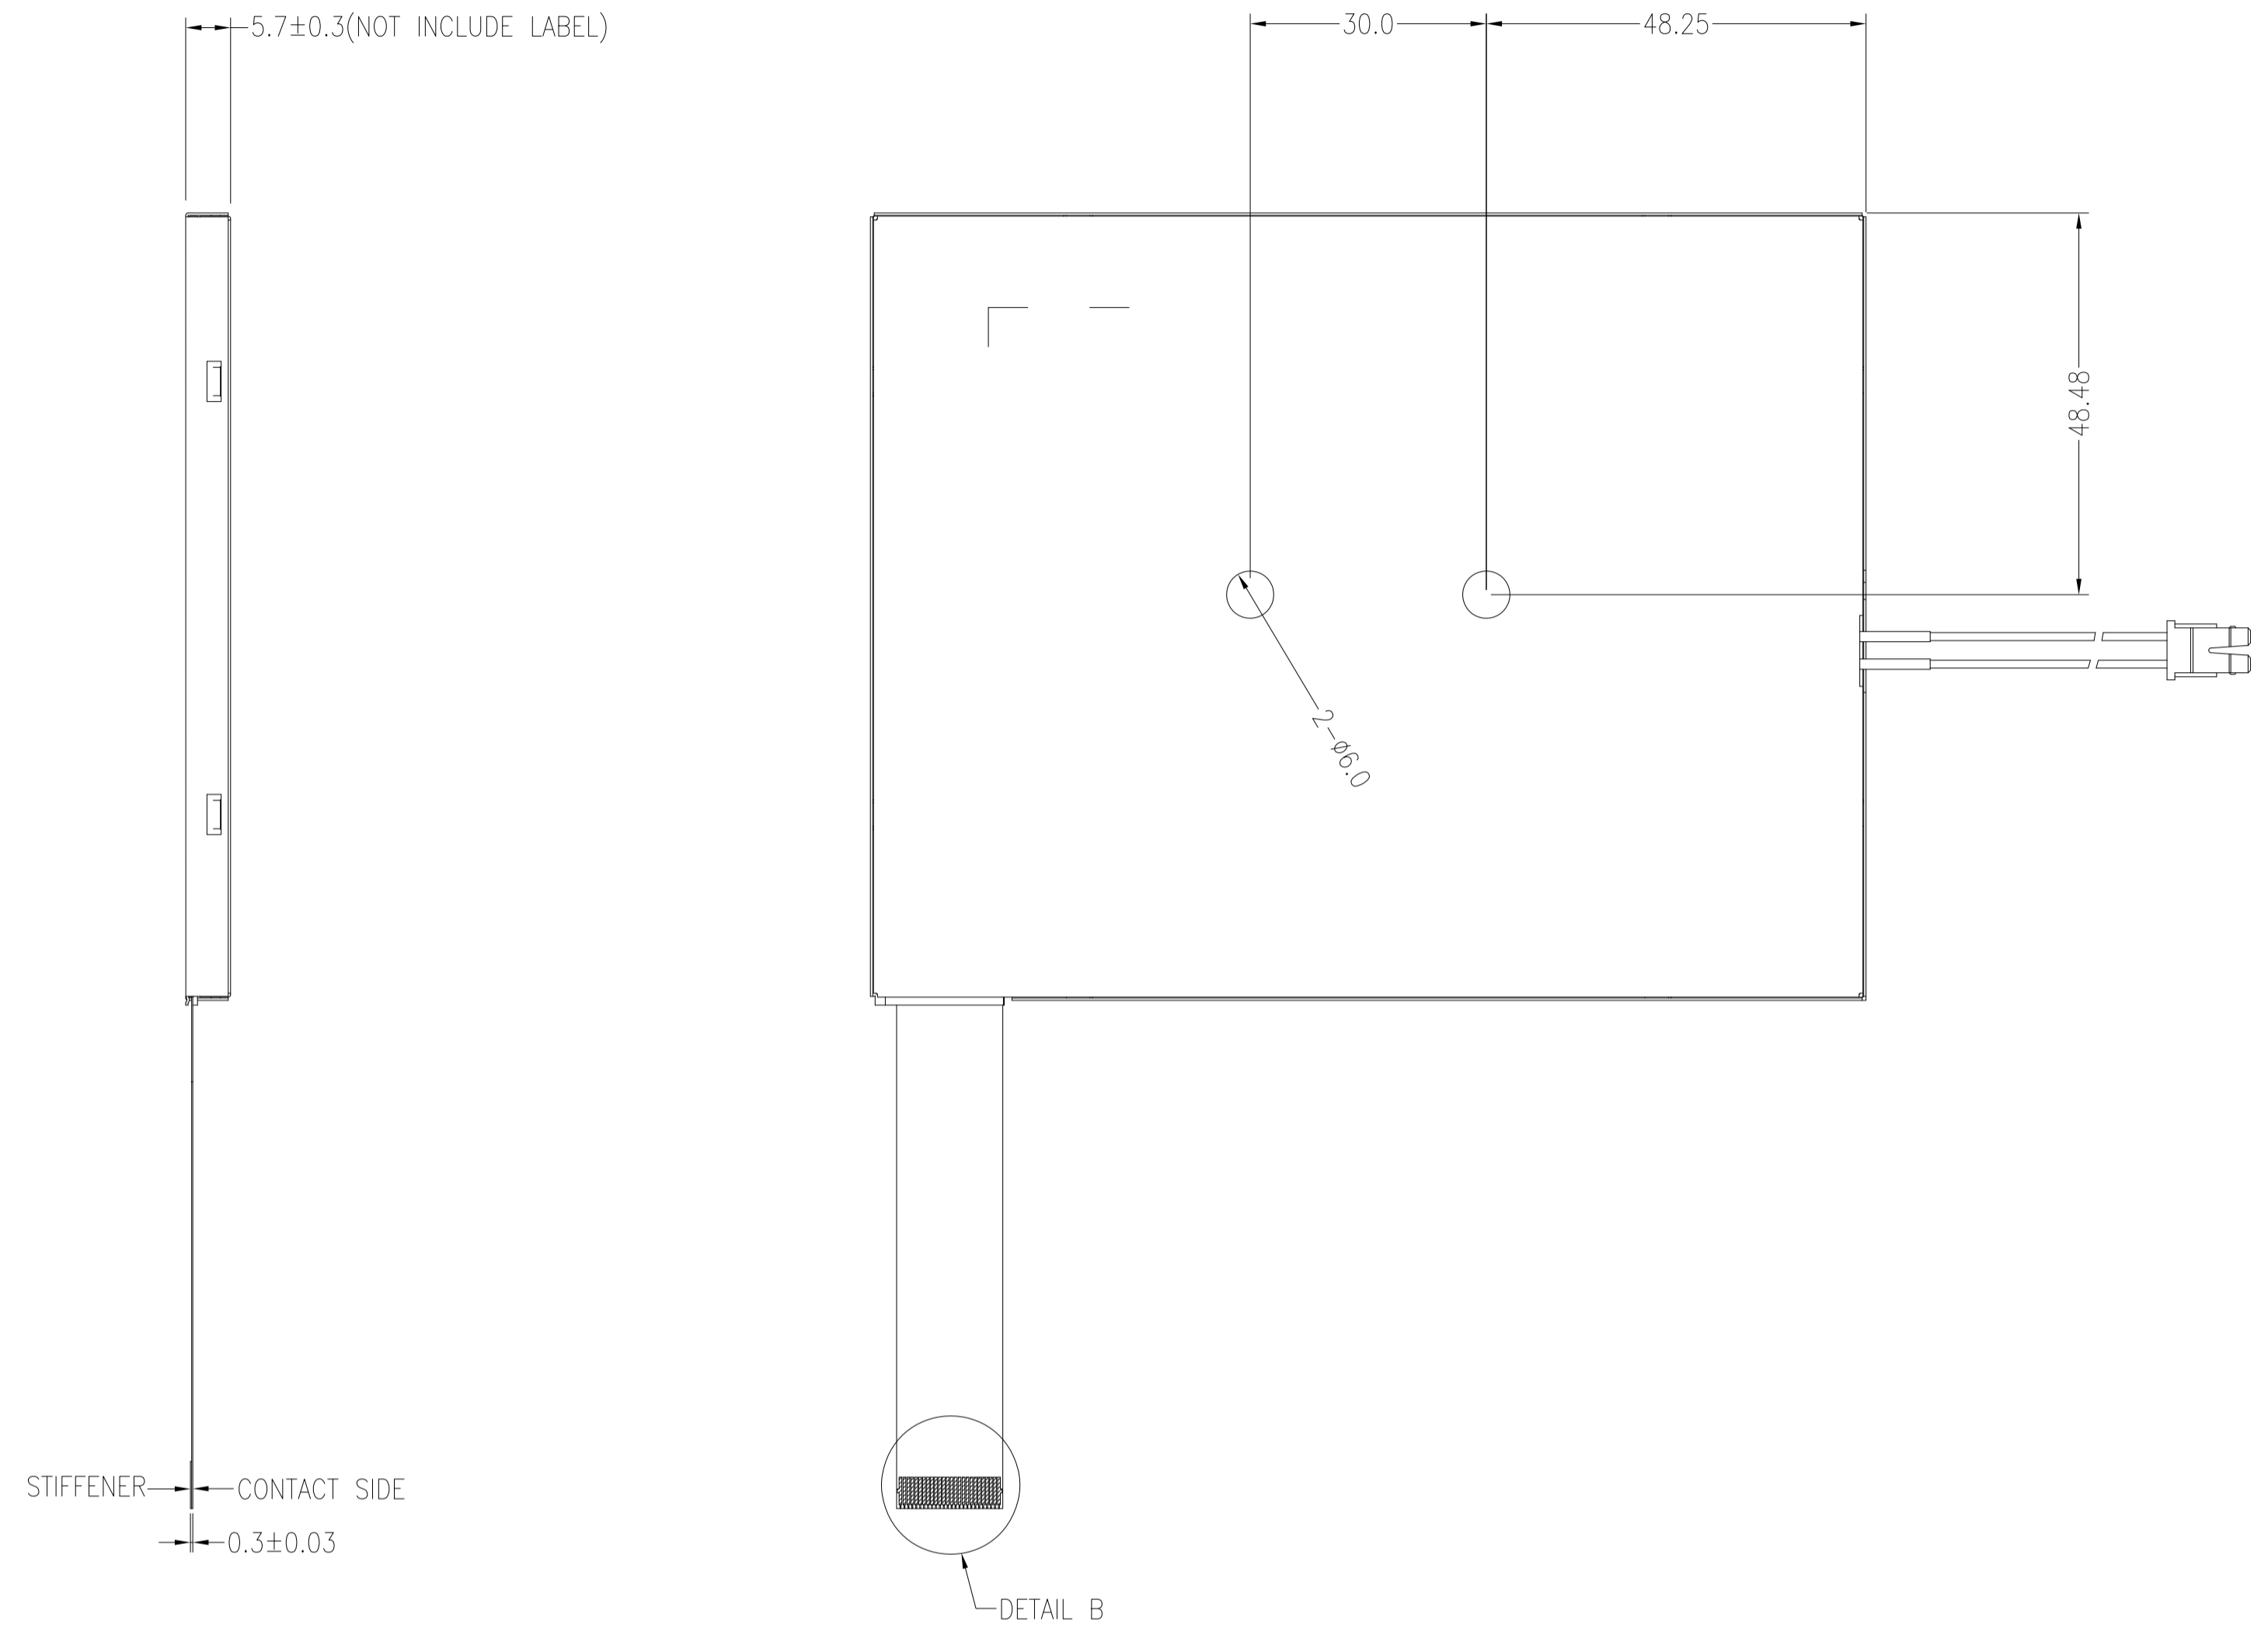


PIN DESCRIPTION	
PIN	SYMBOL
1	GND
2	VCC
3	VGL
4	VGH
5	STVD
6	STVU
7	CKV
8	U/D
9	OEV
10	VCOM
11	VCOM
12	L/R
13	MOD
14	OEH
15	STHL
16	STHR
17	CPH3
18	CPH2
19	CPH1
20	VCC
21	GND
22	VR
23	VG
24	VB
25	AVDD
26	AVSS

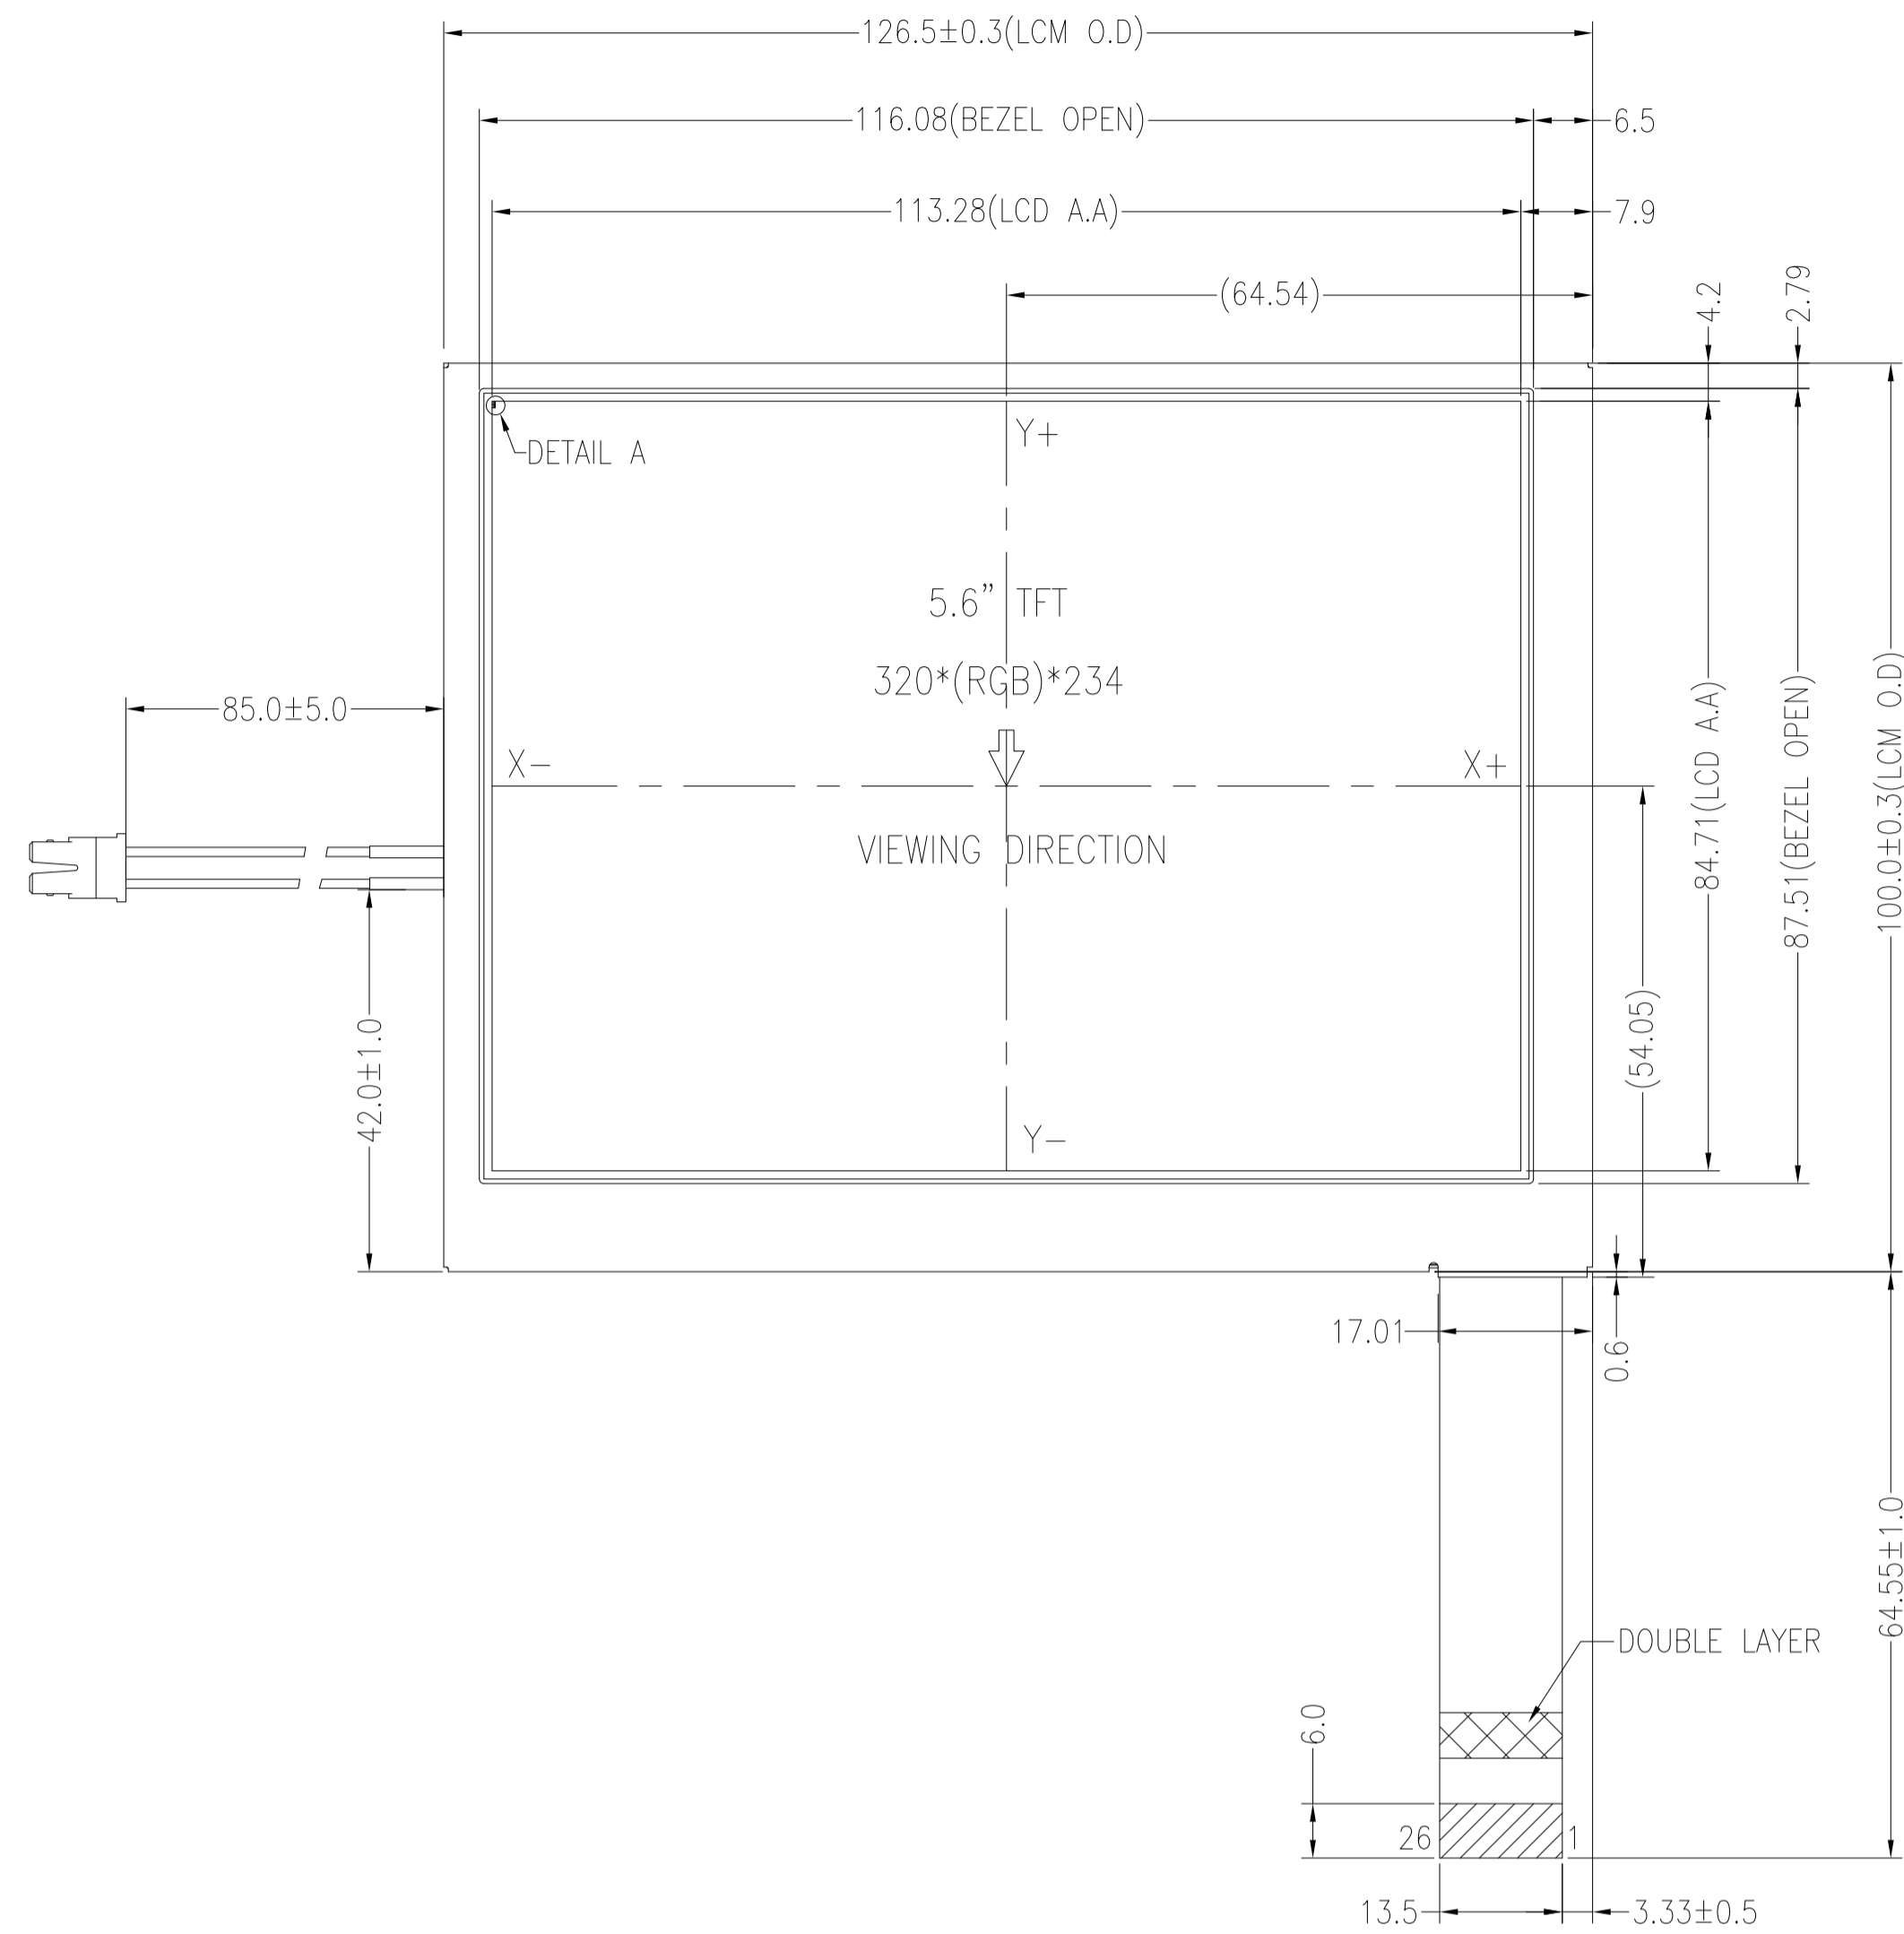


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VCC=5.0V (TYP.)
3. VIEWING DIRECTION: 12 O'CLOCK
4. DRIVER IC: -
5. OPERATING TEMP.: -10°C ~ 60°C
6. STORAGE TEMP.: -20°C ~ 70°C
7. LED BACKLIGHT: 14-CHIP WHITE LED, IF=140mA, VF=6.4V
8. SURFACE LUMINANCE: 200CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. RECOMMEND MATCHING CONNECTOR: BHSR-02VS-1 OR EQUIVALENT
11. CABLE IS "KURABE 3633 AWG28"
12. GENERAL TOLERANCE: ±0.3MM
13. ROHS COMPLIANT

01	FIRST ISSUE	CAROL	2008.11.13	APPROVED BY:	UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	SHEET NO.: 1/1	TFT MODULE

 MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2008.11.13		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MO560DT