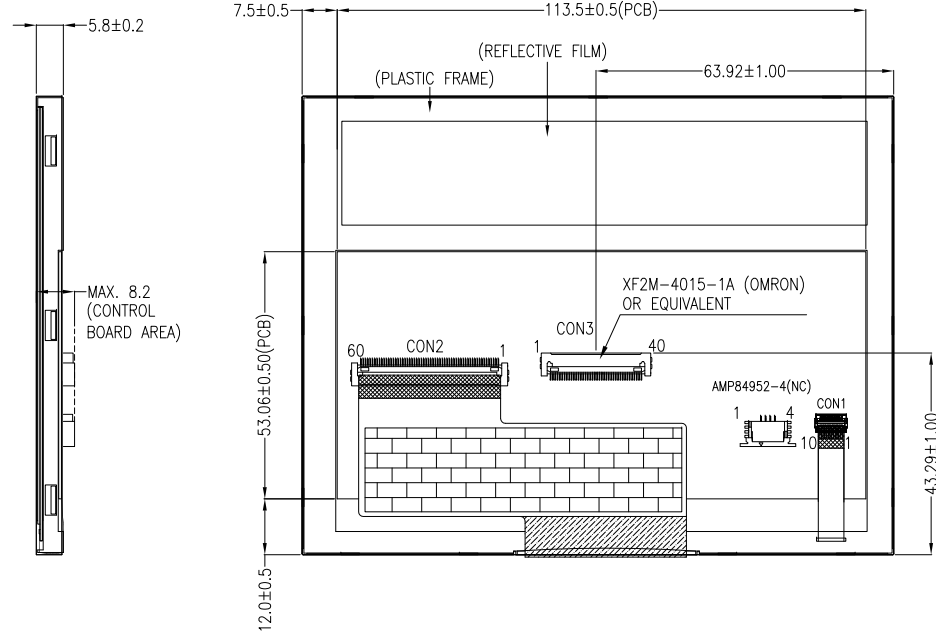
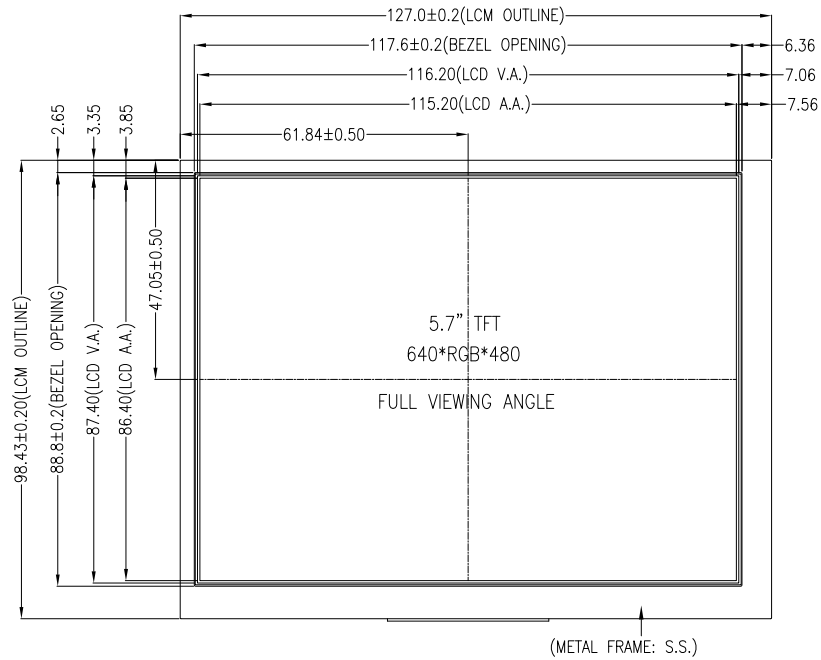


PIXEL DETAIL
(SCALE 50:1)

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: JD9168S
5. OPERATING TEMP.: -30°C ~ 80°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VLED=5.0V (TYP.)
8. SURFACE LUMINANCE: 1000 CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.3MM
11. ROHS COMPLIANT

PIN DESCRIPTION FOR CON3	
PIN	SYMBOL
1	U/D
2	NC
3	HSYNC
4	VLED
5	VLED
6	VLED
7	VCC
8	VSYN
9	DE
10	NC(XL)
11	NC(YU)
12	ADJ
13	B5
14	B4
15	B3
16	VSS
17	B2
18	B1
19	B0
20	VSS
21	G5
22	G4
23	G3
24	VSS
25	G2
26	G1
27	G0
28	VSS
29	R5
30	R4
31	R3
32	VSS
33	R2
34	R1
35	R0
36	NC(XR)
37	NC(YD)
38	DCLK
39	VSS
40	L/R

MULTI-INNO TECHNOLOGY CO., LTD.					
DRAWN BY:	CAROL	2024.05.08		MODULE P/N:	
CHECKED BY:			SCALE : 1/1	MI0570AET-3	
APPROVED BY:			UNIT: mm	DESCRIPTION:	
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE	

01	FIRST ISSUE	CAROL	2024.05.08
VER.	REVISED DESCRIPTION	REVISER	DATE