
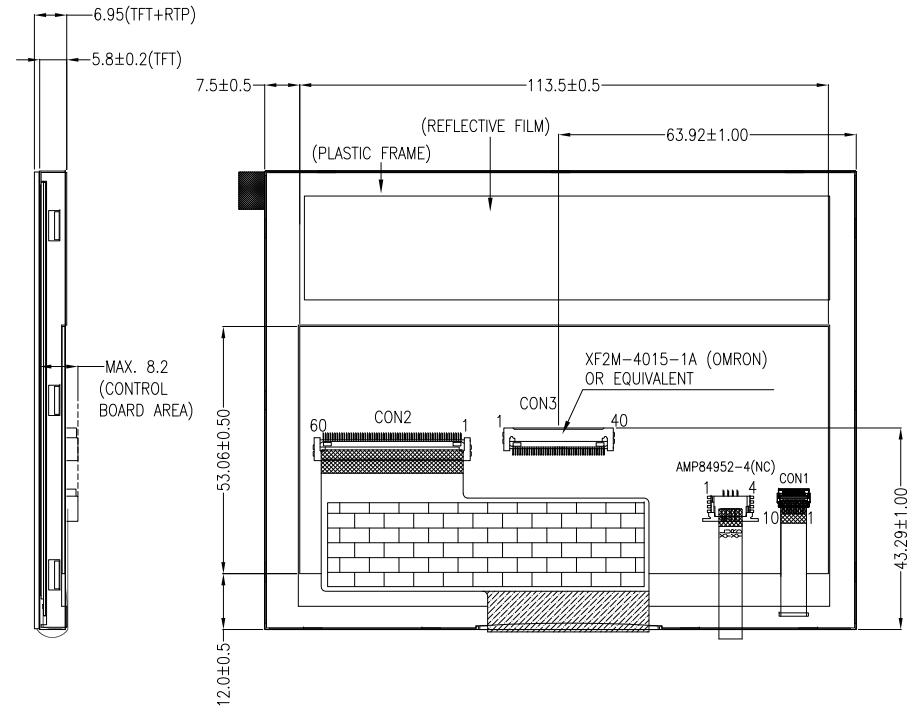


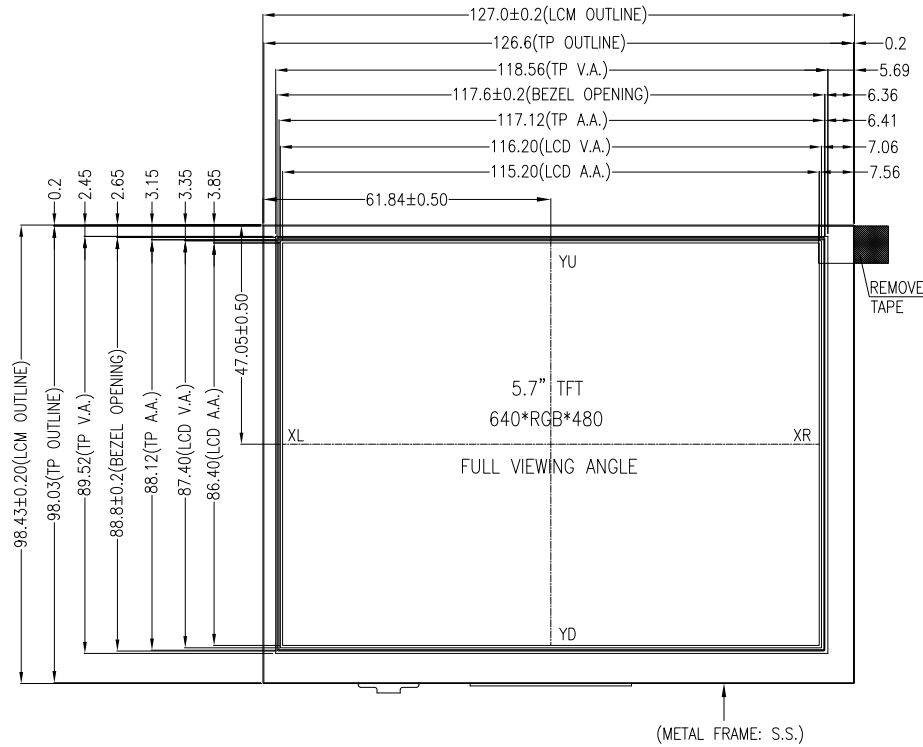

PIN DESCRIPTION FOR CON3	
PIN	SYMBOL
1	U/D
2	NC
3	HSYNC
4	VLED
5	VLED
6	VLED
7	VCC
8	VSYNC
9	DE
10	XL
11	YU
12	ADJ
13	B5
14	B4
15	B3
16	VSS
17	B2
18	B1
19	B0
20	VSS
21	G5
22	G4
23	G3
24	VSS
25	G2
26	G1
27	G0
28	VSS
29	R5
30	R4
31	R3
32	VSS
33	R2
34	R1
35	R0
36	XR
37	YD
38	DCLK
39	VSS
40	L/R

NOTES:

- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
- OPERATING VOLTAGE: VCC=3.3V (TYP.)
- VIEWING DIRECTION: FULL VIEWING ANGLE
- DRIVER IC: JD9168S
- OPERATING TEMP.: -20°C ~ 70°C
- STORAGE TEMP.: -30°C ~ 80°C
- LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VLED=5.0V (TYP.)
- SURFACE LUMINANCE: 780 CD/M² (TYP.)
- TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
- GENERAL TOLERANCE: ±0.3MM
- ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.				
DRAWN BY:	CAROL	2024.05.08		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0570AET-3RP
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT + RTP MODULE

01	FIRST ISSUE	CAROL	2024.05.08
VER.	REVISED DESCRIPTION	REVISER	DATE