
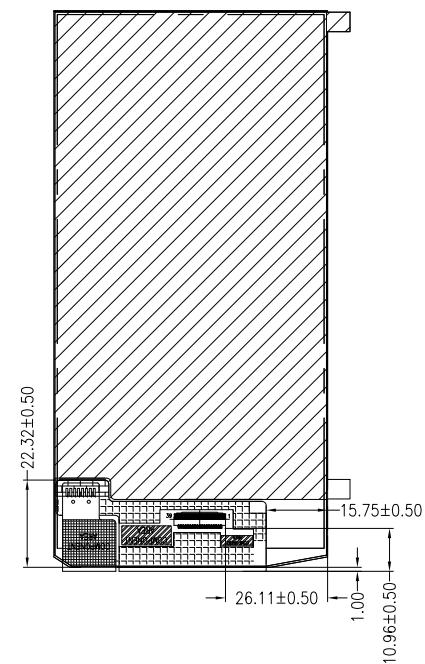
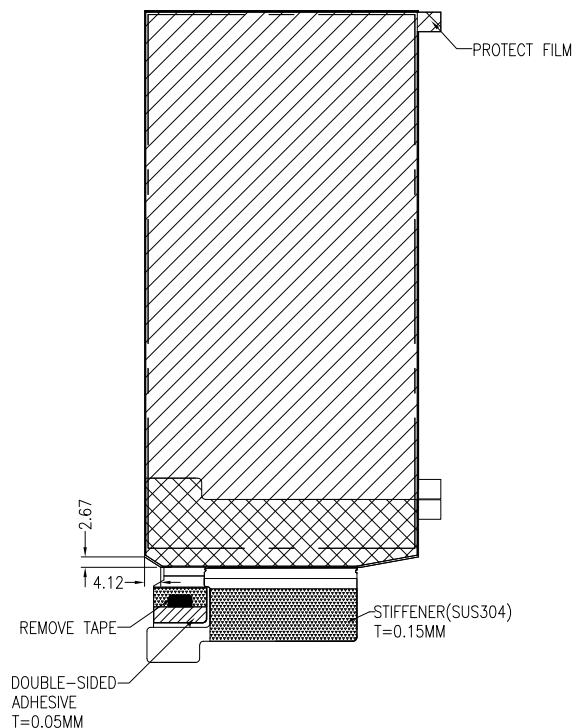
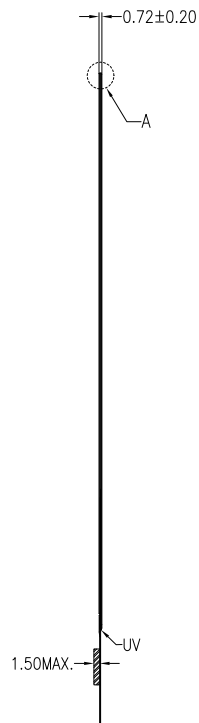


NOTES:

1. DISPLAY TYPE: 6.0" AMOLED,
2. OPERATING VOLTAGE: VCI=2.8V (TYP.),VDDIO=1.8V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: CH13721
5. TOUCH DRIVER IC: CST148
6. OPERATING TEMP.: -20°C ~ 70°C
7. STORAGE TEMP.: -30°C ~ 80°C
8. SURFACE LUMINANCE: 360 CD/M² (TYP.)
9. RECOMMEND MATCHING CONNECTOR: HIROSE FH26-39S-0.3SHW OR EQUIVALENT
10. GENERAL TOLERANCE: ±0.30MM
11. ROHS COMPLIANT

PIN DESCRIPTION			
PIN	SYMBOL	PIN	SYMBOL
1	ELVDD	21	AVDD
2	ELVSS	22	CLKN
3	ELVDD	23	VDDIO
4	ELVSS	24	CLKP
5	ELVDD	25	RESET
6	ELVSS	26	GND
7	TP_INT	27	ERR_FG
8	GND	28	D1N
9	TP_RST	29	TE
10	D3N	30	D1P
11	TP_SCL	31	AVDD_EN
12	D3P	32	GND
13	TP_SDA	33	SWIRE
14	GND	34	D2N
15	TP_VCI	35	NC
16	D0N	36	D2P
17	NC	37	NC
18	D0P	38	GND
19	VCI	39	MTP
20	GND		

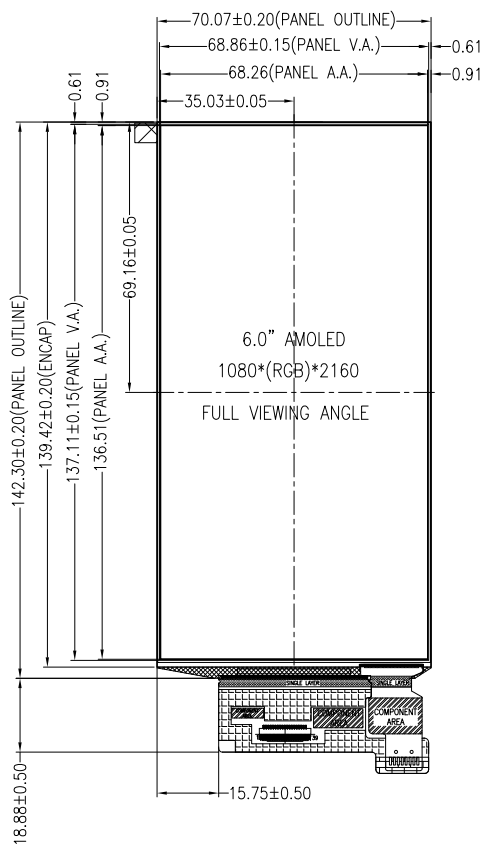

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	JERRY	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT: mm	MI0600AO-FCP
APPROVED BY:		SHEET NO: 1/1	DESCRIPTION:
VERSION NO:	01		AMOLED + CTP MODULE

01	FIRST ISSUE	JERRY	2024.12.07
VER.	REVISED DESCRIPTION	REVISER	DATE