


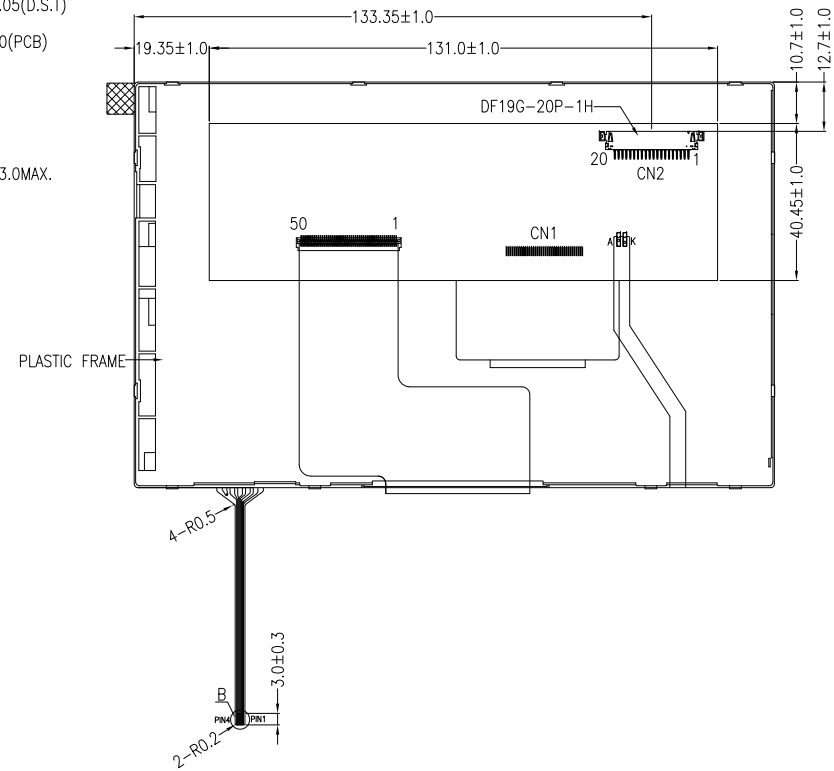


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: 12 O'CLOCK
4. DRIVER IC: EK79713B + EK73202A
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT: 24-CHIP WHITE LED
BUILT-IN BACKLIGHT DRIVER: VBL=5.0V
8. SURFACE LUMINANCE: 440CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. CN1 PADS RESERVD FOR RGB INTERFACE
CN2 FOR LVDS INTERFACE
11. THE SINGLE LAYER AREA OF FPC IS BENDABLE AND THE BENDING RADIUS MUST BE NOT LESS THAN 1.5MM
12. GENERAL TOLERANCE: ±0.3MM
13. ROHS COMPLIANT

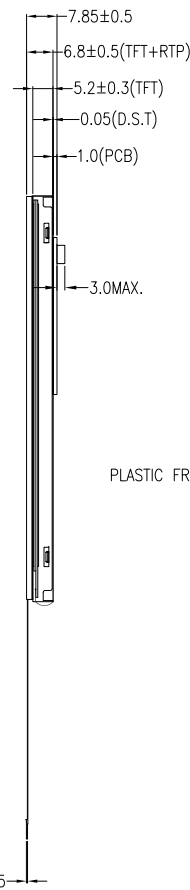

DETAIL A
(SCALE 40:1)



DETAIL B
(SCALE: 4:1)

PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	VCC
2	VCC
3	VSS
4	VSS
5	INO-
6	INO+
7	VSS
8	IN1-
9	IN1+
10	VSS
11	IN2-
12	IN2+
13	VSS
14	CLK-
15	CLK+
16	VSS
17	BL_ADJ
18	VBL
19	VSS
20	VSS

PIN DESCRIPTION FOR RTP	
PIN	SYMBOL
1	YU
2	XL
3	YD
4	XR

MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL 2022.03.17		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI0700A2T-30RP1
APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	SHEET NO.: 1/1	TFT + RTP MODULE

01	FIRST ISSUE	CAROL	2022.03.17
VER.	REVISED DESCRIPTION	REVISER	DATE