

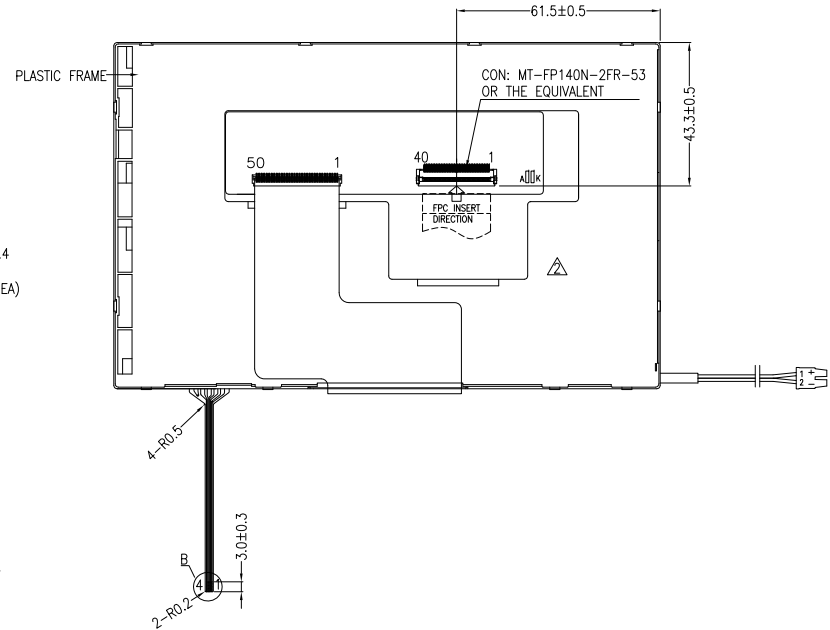
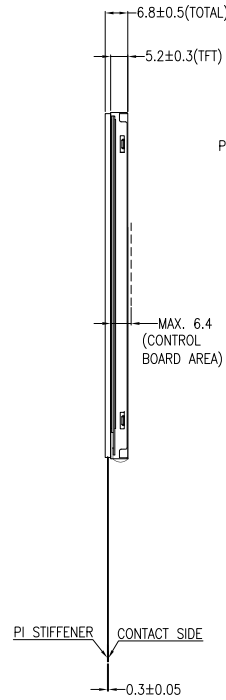
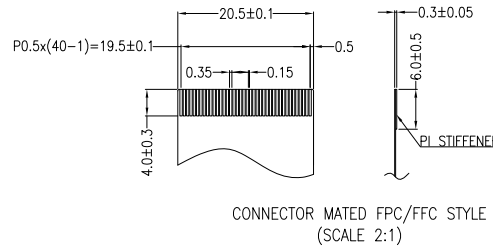




NO MECHANICAL HOUSING TO HOLD THE TFT AND THE TOUCH PANEL ON THIS PRODUCT, SO THE END UNIT'S MECHANICAL DESIGN MUST INCLUDE A HOUSING FOR PREVENTING THE SEPARATION OF THE TFT AND THE TOUCH PANEL.

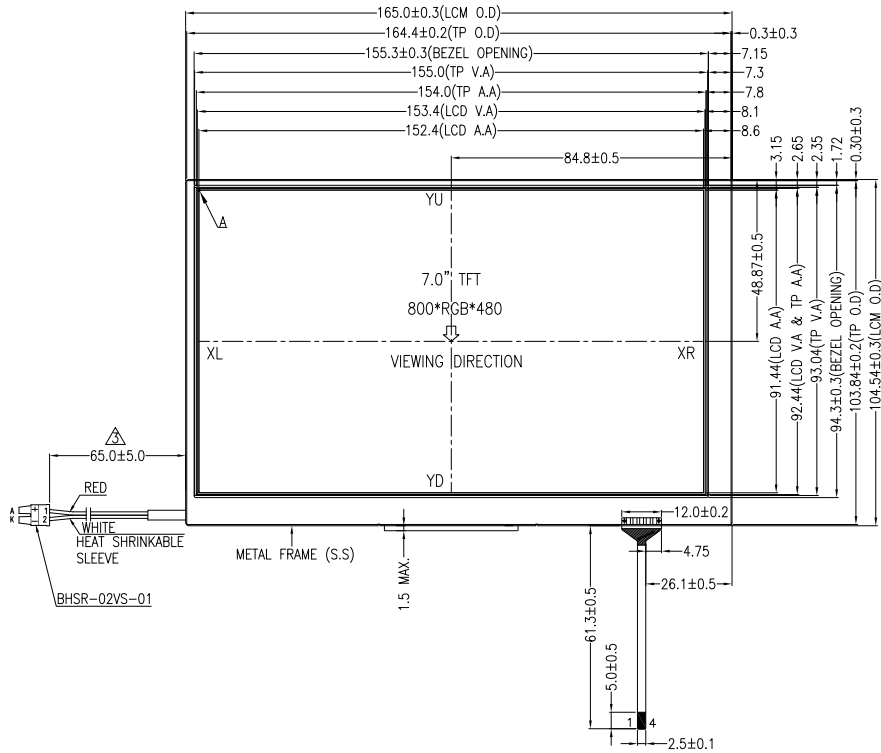

PIN DESCRIPTION FOR LCM	
PIN	SYMBOL
1	GND
2	GND
3	NC
4	VCC
5	VCC
6	VCC
7	VCC
8	NC
9	DE
10	GND
11	GND
12	GND
13	B5
14	B4
15	B3
16	GND
17	B2
18	B1
19	B0
20	GND
21	G5
22	G4
23	G3
24	GND
25	G2
26	G1
27	G0
28	GND
29	R5
30	R4
31	R3
32	GND
33	R2
34	R1
35	R0
36	GND
37	GND
38	DCLK
39	GND
40	GND

PIN DESCRIPTION FOR RTP	
PIN	SYMBOL
1	YU
2	XL
3	YD
4	XR

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: 12:00 O'CLOCK
4. DRIVER IC: EK79713B + EK73202A
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT: 24-CHIP WHITE LED, If=160mA, Vf=8.4V~10.2V
8. SURFACE LUMINANCE: 400CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. GENERAL TOLERANCE: ±0.3MM
12. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2022.02.25		MODULE P/N:
CHECKED BY:			SCALE : 1/1	M10700A2T-38RP2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	03		SHEET NO.: 1/1	TFT + RTP MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
03	MODIFY THE CABLE LENGTH OF B/L.	RITA	2022.05.12
02	MODIFY THE DESIGN OF THE PLASTIC FRAME.	CAROL	2022.03.09
01	FIRST ISSUE	CAROL	2022.02.25