
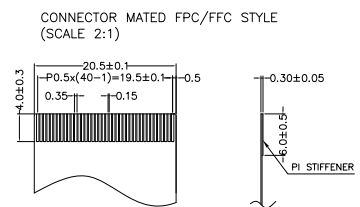
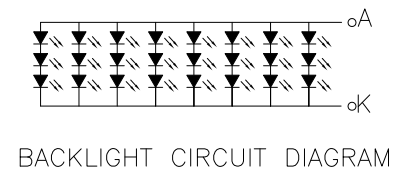



PIN ASSIGNMENT FOR LCM:

PIN	SYMBOL
1	GND
2	GND
3	NC
4	VCC
5	VCC
6	VCC
7	VCC
8	NC
9	DE
10	GND
11	GND
12	GND
13	B5
14	B4
15	B3
16	GND
17	B2
18	B1
19	BO
20	GND
21	G5
22	G4
23	G3
24	GND
25	G2
26	G1
27	G0
28	GND
29	R5
30	R4
31	R3
32	GND
33	R2
34	R1
35	RO
36	GND
37	GND
38	DCLK
39	GND
40	GND

PIN ASSIGNMENT FOR RTP:

PIN	SYMBOL
1	YU
2	XL
3	YD
4	XR



- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
 2. OPERATING VOLTAGE: VCC=3.3V
 3. VIEWING DIRECTION: 12 O'CLOCK.
 4. DRIVER IC: HX8262+HX8678.
 5. OPERATING TEMP.: -20°C ~ 70°C.
 6. STORAGE TEMP.: -30°C ~ 80°C.
 7. LED BACKLIGHT: 24-CHIP WHITE LED, If=160mA, Vf=9.6V.
 8. SURFACE LUMINANCE: 400CD/M²(TYP.).
 9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
 10. GENERAL TOLERANCE: ±0.3mm.
 11. ROHS COMPLIANT.

MIT MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	20180301	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI0700AJT-38RP2
APPROVED BY:				DESCRIPTION:
VERSION NO:	01			TFT & RTP MODULE

01	FIRST ISSUE	RITA	2018.03.01
VER.	REVISED DESCRIPTION	REVISER	DATE