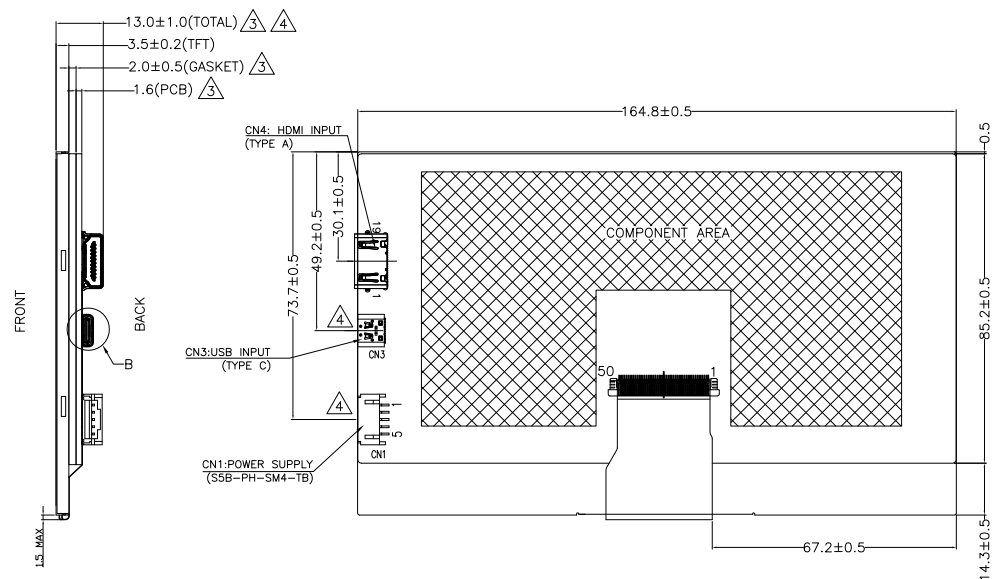
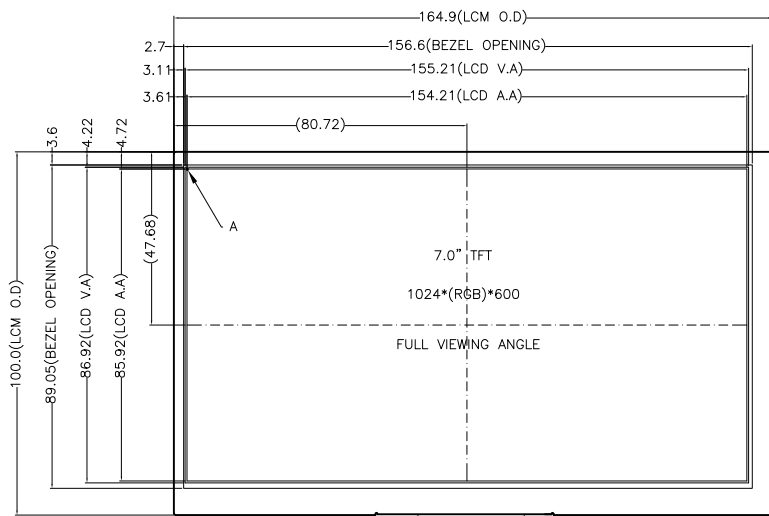


NOTES:

1. DISPLAY TYPE: TFT/TRANSMISSIVE/NORMALLY BLACK.
2. POWER SUPPLY(CN1): VDD=12.0V(TYP.).
3. VIEWING DIRECTION: FULL VIEWING ANGLE.
4. DRIVER IC: RTD2660H.
5. OPERATING TEMP.: -20°~70°.
6. STORAGE TEMP.: -30°~80°.
7. BACKLIGHT: WHITE LED.
8. SURFACE LUMINANCE: 400CD/M²(TYP.).
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
10. INTERFACE: HDMI AND USB INPUT.
11. GENERAL TOLERANCE: ±0.3mm.
12. ROHS COMPLIANT.

PIN ASSIGNMENT FOR CN4 (HDMI INPUT)	
NO.	SYMBOL
1	TMDS DATA 2+
2	TMDS DATA 2 SHIELD
3	TMDS DATA 2-
4	TMDS DATA 1+
5	TMDS DATA 1 SHIELD
6	TMDS DATA 1-
7	TMDS DATA 0+
8	TMDS DATA 0 SHIELD
9	TMDS DATA 0-
10	TMDS CLOCK+
11	TMDS CLOCK SHIELD
12	TMDS CLOCK-
13	CEC
14	RESERVED(N.C. ON DEVICE)
15	SCL
16	SDA
17	DDC/CEC GROUND
18	+5V POWER
19	HOT PLUG DETECT

PIN ASSIGNMENT FOR CN1 (POWER SUPPLY AND BACKLIGHT BRIGHTNESS ADJUSTING)	
PIN	SYMBOL
1	VCC(+12V)
2	GND
3	GND
4	BL_PWM
5	BL_EN

04	OPTIMIZE THE HDMI BOARD DESIGN, DELETE REDUNDANT FUNCTION	CAROL	2021.11.29	DRAWN BY:	RITA	2019.05.14	MODULE P/N:	MI0700BNT-1-HB
03	ADD GASKET. MODIFY MODULE TOTAL THICKNESS.	CAROL	2019.10.25	CHECKED BY:		SCALE : 1/1		
02	CORRECT THE PIXEL PITCH SIZE	RITA	2019.06.27	APPROVED BY:		UNIT: mm		
01	FIRST ISSUE	RITA	2019.05.14	VERSION NO:	04	SHEET NO.: 1/1		
VER.	REVISED DESCRIPTION	REVISER	DATE					DESCRIPTION:
								TFT + PCB MODULE



MULTI-INNO TECHNOLOGY CO., LTD.