




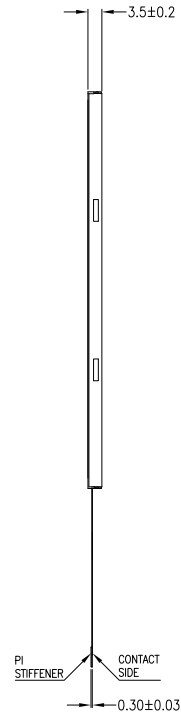



PIN ASSIGNMENT	
NO.	SYMBOL
1	LEDA
2	LEDA
3	VGH
4	VGL
5	UPDN
6	SHLR
7	LEDK
8	LEDK
9	AVDD
10	GND
11	MIPI_D3P
12	MIPI_D3N
13	GND
14	MIPI_D2P
15	MIPI_D2N
16	GND
17	MIPI_CLKP
18	MIPI_CLKN
19	GND
20	MIPI_D1P
21	MIPI_D1N
22	GND
23	MIPI_D0P
24	MIPI_D0N
25	GND
26	STBYB
27	LRSTB
28	VDD
29	VDD
30	VCOM

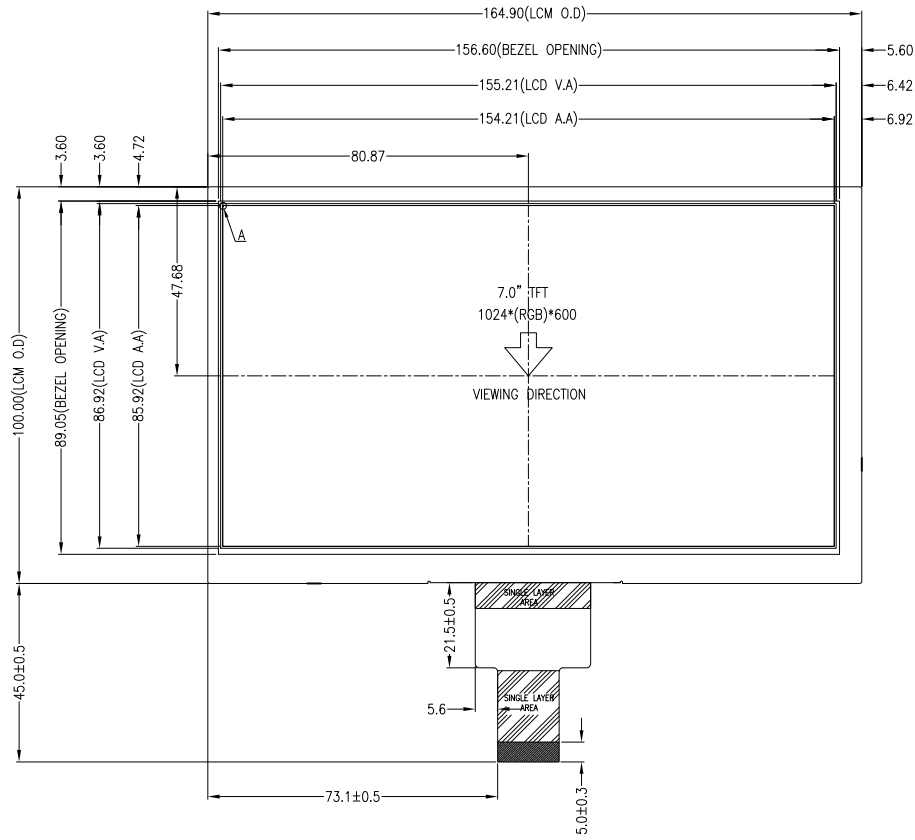

DETAIL A
(SCALE 40:1)

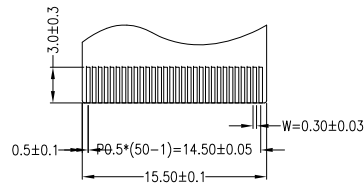

DETAIL B
(SCALE 3:1)

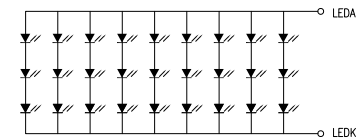

BACKLIGHT CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
2. OPERATING VOLTAGE: VDD=1.8V.
3. VIEWING DIRECTION: 12 O'CLOCK.
4. DRIVER IC: EK79007AD+EK73217BCGA.
5. OPERATING TEMP.: -20°C ~ 70°C.
6. STORAGE TEMP.: -30°C ~ 80°C.
7. LED BACKLIGHT: 27-CHIP WHITE LED, I_f=180mA, V_f=8.7V~9.9V.
8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
9. SURFACE LUMINANCE: 400CD/M²(TYP.).
10. GENERAL TOLERANCE: ±0.3MM.
11. ROHS COMPLIANT.



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2019.06.11	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI0700BQT-1
APPROVED BY:				DESCRIPTION:
VERSION NO:	02			TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
02	CORRECT THE OPERATING VOLTAGE.	RITA	2020.10.20
01	FIRST ISSUE	RITA	2019.06.11