


DETAIL DISPLAY-FPC
(REVERSE SIDE SHOWN)
SCALE 3:1

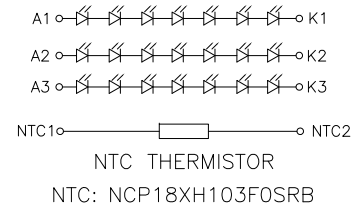

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: HX8298-A*3 + HX8695E*1
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -40°C ~ 90°C
7. LED BACKLIGHT: 21-CHIP WHITE LED, IF=240mA, VF=21.0V±2.0V
8. SURFACE LUMINANCE: 1000CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: HC
10. GENERAL TOLERANCE: ±0.3MM
11. ROHS COMPLIANT

TFT PIN DESCRIPTION	
PIN	SYMBOL
1	NC
2	CS
3	SCL
4	SDA
5	VCC
6	VCC
7	GND
8	GND
9	DO_N
10	DO_P
11	GND
12	D1_N
13	D1_P
14	GND
15	D2_N
16	D2_P
17	GND
18	CLK_N
19	CLK_P
20	GND
21	D3_N
22	D3_P
23	GND
24	VSFB
25	DISP_ON
26	HVR
27	NTC2
28	NTC1
29	C3
30	C3
31	A3
32	A3
33	C2
34	C2
35	A2
36	A2
37	C1
38	C1
39	A1
40	A1

Mi MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL 2019.10.16		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI0700BST-1
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	02	SHEET NO.: 1/1	TFT MODULE

VER.	REVISION DESCRIPTION	REVISER	DATE
02	CORRECT RESOLUTION ON DRAWING	CAROL	2019.10.22
01	FIRST ISSUE	CAROL	2019.10.16