
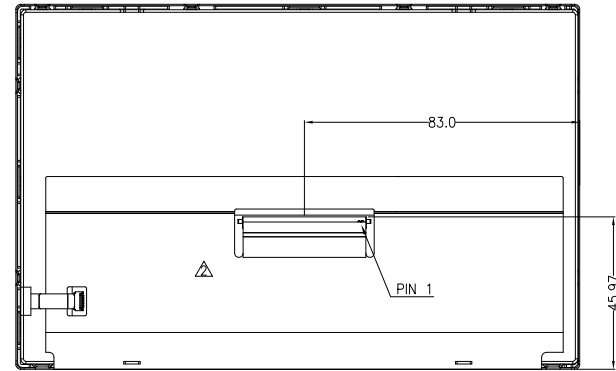

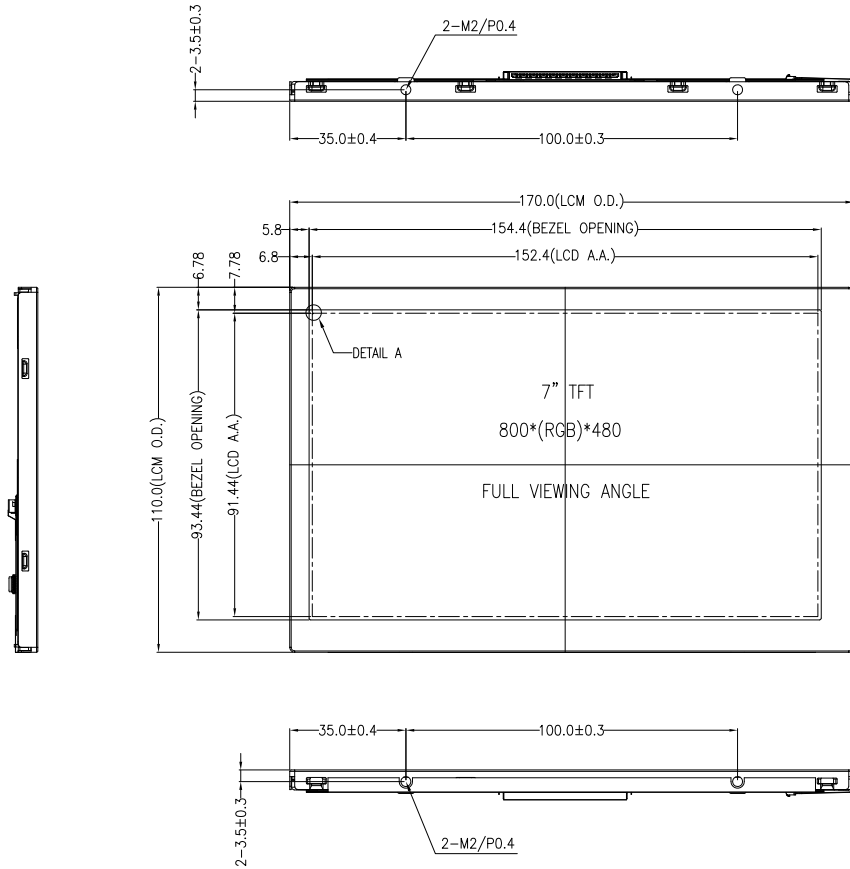




| TFT PIN DESCRIPTION | |
|---------------------|----------|
| PIN | SYMBOL |
| 1 | 12V |
| 2 | 12V |
| 3 | 12V |
| 4 | 12V |
| 5 | ENLED |
| 6 | Dimming |
| 7 | NC |
| 8 | NC |
| 9 | VCC |
| 10 | VCC |
| 11 | GND |
| 12 | GND |
| 13 | RX0- |
| 14 | RX0+ |
| 15 | GND |
| 16 | RX1- |
| 17 | RX1+ |
| 18 | GND |
| 19 | RX2- |
| 20 | RX2+ |
| 21 | GND |
| 22 | RXCLK- |
| 23 | RXCLK+ |
| 24 | GND |
| 25 | RX3- |
| 26 | RX3+ |
| 27 | GND |
| 28 | SEL6 / 8 |
| 29 | GND |
| 30 | GND |



NOTES:

1. DISPLAY TYPE: IPS TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. OPERATING TEMP.: -30°C ~ 85°C
5. STORAGE TEMP.: -40°C ~ 90°C
6. LED BACKLIGHT: LED
7. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
8. SURFACE LUMINANCE: 500CD/M²(TYP)
9. LCM CONNECTOR: STARCONN 093G30-B0001A-G4 OR EQUIVALENT
10. USE HOLE: STANDOFF TYPE: M2, PITCH=0.5/MACHINE, TORQUE=5KGF-CM(MAX.), DEPTH=2.6MM(MAX.)
DIAMETER=2.6MM, SIDE FORCE=20KGF(MAX.), NOMAL TENSILE FORCE=40KGF(MAX.)
11. GENERAL TOLERANCE: ±0.5MM
12. ROHS COMPLIANT

| | | | |
|---|-------|--------------------------------|---|
|  | | MULTI-INNO TECHNOLOGY CO.,LTD. | |
| DRAWN BY: | CAROL | 2020.03.16 |  MODULE P/N: |
| CHECKED BY: | | | SCALE : 1/1 |
| APPROVED BY: | | | UNIT: mm |
| VERSION NO: | 02 | | SHEET NO.: 1/1 |
| | | | DESCRIPTION: TFT MODULE |

| | | | |
|------|----------------------|---------|------------|
| 02 | MODIFY MYLAR OUTLINE | CAROL | 2020.06.12 |
| 01 | FIRST ISSUE | CAROL | 2020.03.16 |
| VER. | REVISED DESCRIPTION | REVISER | DATE |