
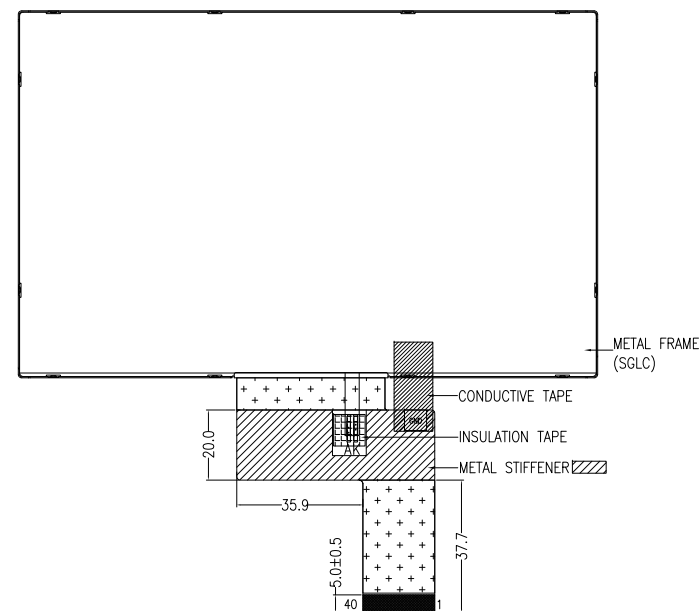
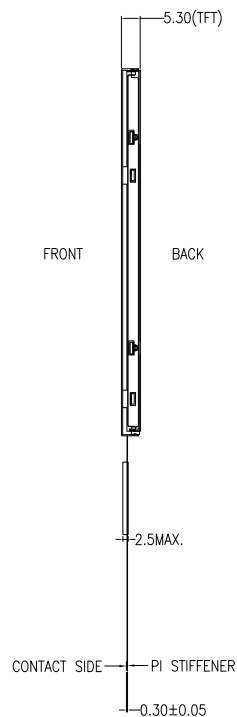


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: HX8249-A-LT+HX8678-C-LT
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -40°C ~ 85°C
7. LED BACKLIGHT: WHITE LED, IF=300mA, VF=8.4V~10.4V
8. SURFACE LUMINANCE: 1000 CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: CIRCULAR
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. GENERAL TOLERANCE: ±0.30MM
12. ROHS COMPLIANT

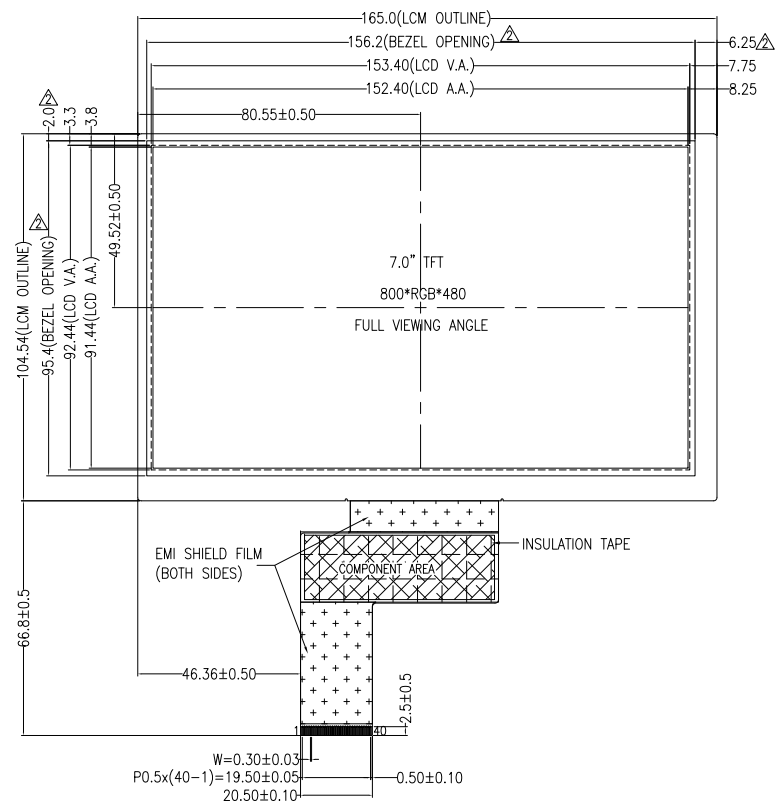

MULTI-INNO TECHNOLOGY CO., LTD.

	DRAWN BY:	CAROL	2022.10.22		MODULE P/N: MI0700CDT-3
26	CHECKED BY:			SCALE : 1/1	
22	APPROVED BY:			UNIT: mm	
	VERSION NO:	02		SHEET NO.: 1/1	
					DESCRIPTION: TFT MODULE