


PIN DESCRIPTION	
PIN	SYMBOL
1	A1
2	A2
3	A3
4	DUMMY
5	K1
6	K2
7	K3
8	NTC+
9	NTC-
10	GND
11	CSB
12	SCL
13	SDA
14	GND
15	RESET
16	STBYB
17	FAIL_DETECT
18	GND
19	D3P
20	D3N
21	GND
22	CKP
23	CKN
24	GND
25	D2P
26	D2N
27	GND
28	D1P
29	D1N
30	GND
31	D0P
32	D0N
33	GND
34	FEED_BACK
35	VCC
36	VCC
37	GND
38	TB_RL
39	BISTEN
40	VDD_OTP

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
 2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
 3. VIEWING DIRECTION: FULL VIEWING ANGLE
 4. DRIVER IC: -
 5. OPERATING TEMP.: -40°C ~ 85°C
 6. STORAGE TEMP.: -40°C ~ 90°C
 7. LED BACKLIGHT: WHITE LED, IF=225mA, VF=22.4V~26.4V
 8. SURFACE LUMINANCE: 1000 CD/M² (TYP.)
 9. TOP POLARIZER SURFACE TREATMENT: HC
 12. GENERAL TOLERANCE: ±0.30MM
 13. ROHS COMPLIANT


MIT MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL 2021.02.28		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI0700CFT-2
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO.: 1/2	TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:
01	FIRST ISSUE	CAROL	2021.02.28	

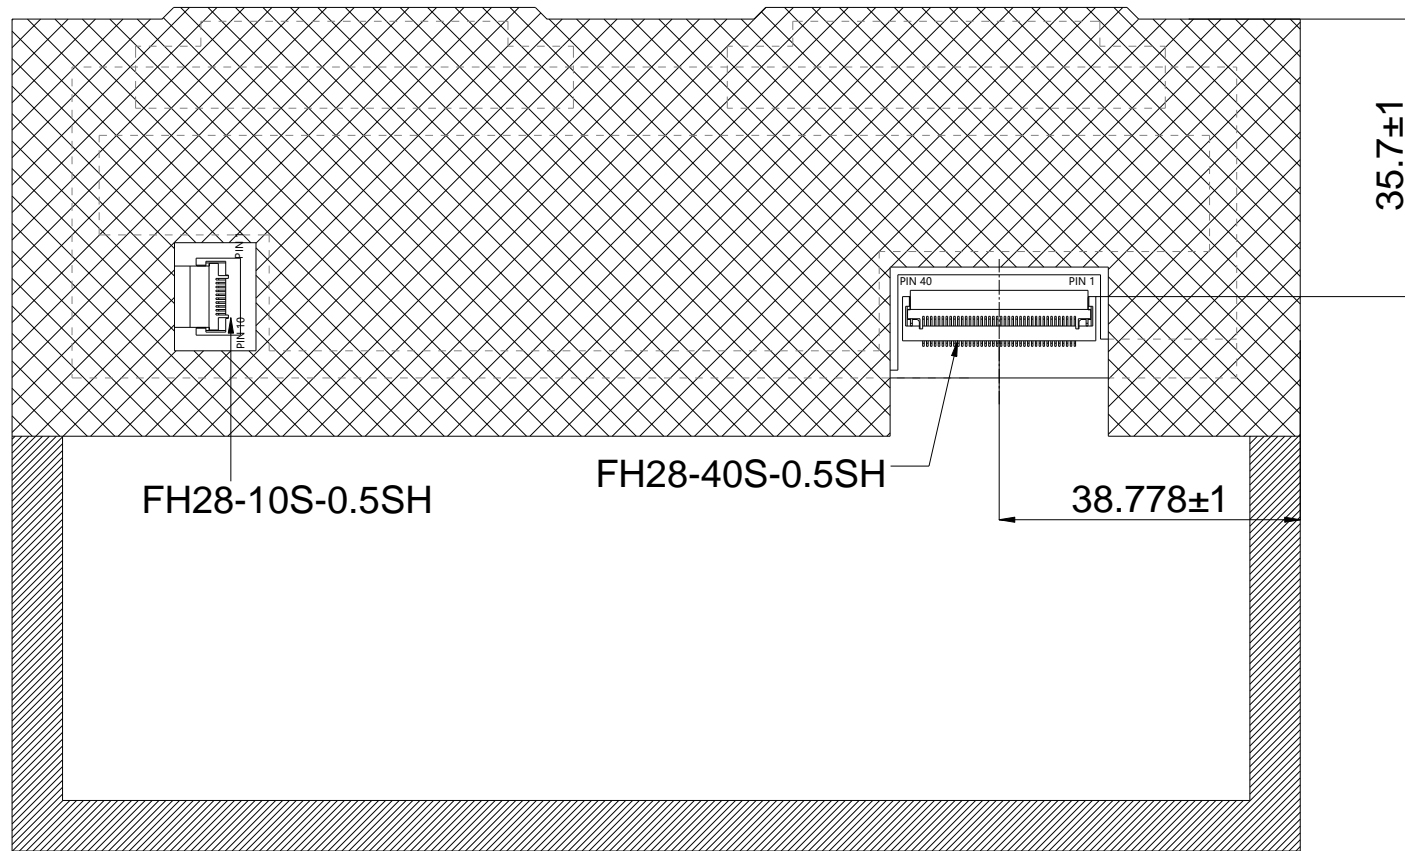

 MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2021.02.28		MODULE P/N:
CHECKED BY:			SCALE : 1/1	M0700CFT-2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2021.02.28
VER.	REVISED DESCRIPTION	REVISER	DATE