



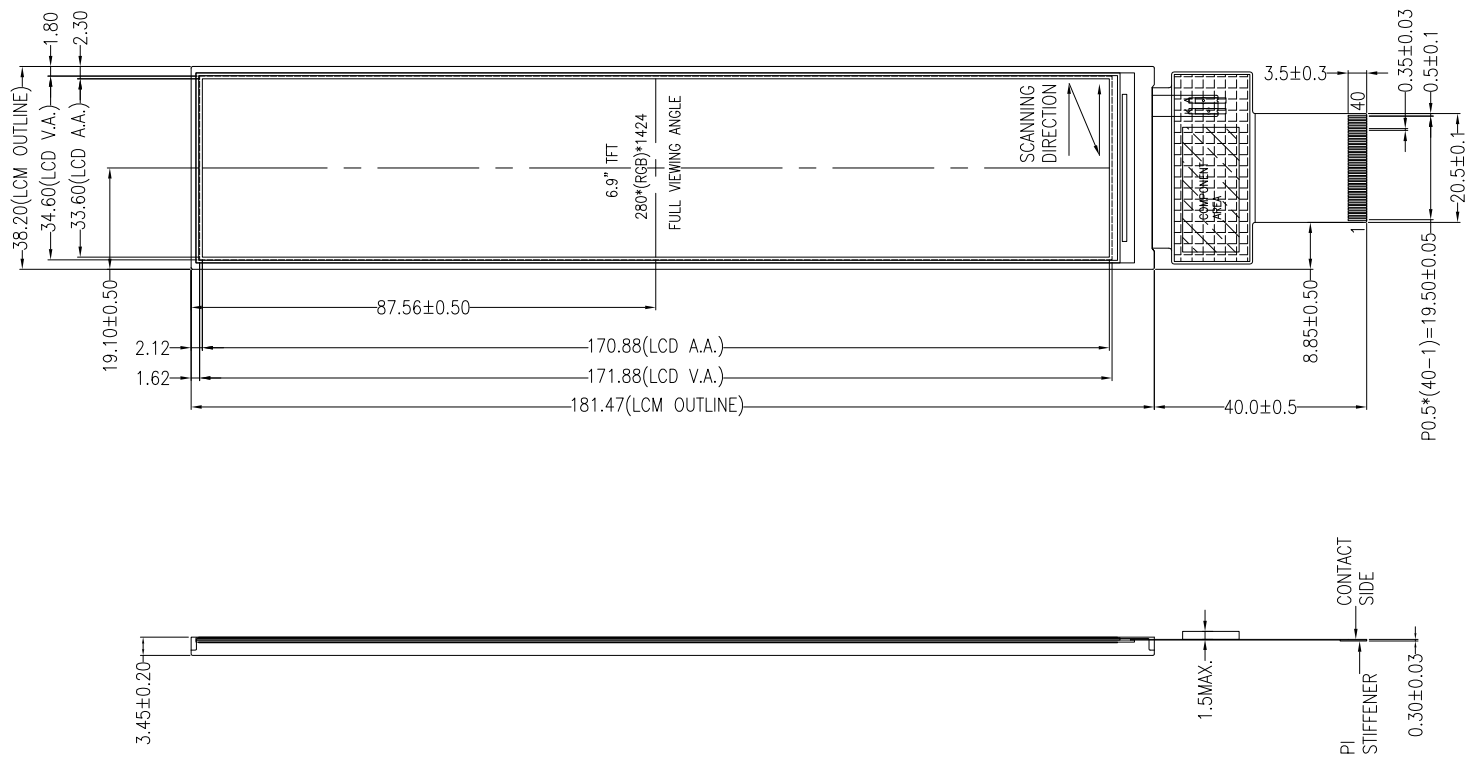


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V, IOVCC=1.8V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: JD9365DA
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, If=80mA, Vf=11.2V~13.6V
8. SURFACE LUMINANCE: 500CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. RECOMMEND MATCHING CONNECTOR: HRS FH-40S-0.5SH OR EQUIVALENT
11. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
12. UNMARKED TOLERANCE: ±0.3MM
13. ROHS COMPLIANT



PIXEL DETAIL
(SCALE 100:1)



BACKLIGHT CIRCUIT DIAGRAM

PIN ASSIGNMENT


PIN	SYMBOL
1	GND
2	GND
3	NC
4	NC
5	GND
6	MIPI_P2
7	MIPI_N2
8	GND
9	MIPI_P1
10	MIPI_N1
11	GND
12	MIPI_CP
13	MIPI_CN
14	GND
15	MIPI_P0
16	MIPI_N0
17	GND
18	MIPI_P3
19	MIPI_N3
20	GND
21	LEDK
22	LEDK
23	GND
24	LEDK
25	LEDK
26	GND
27	VCC
28	VCC
29	GND
30	LCD_RST
31	TE
32	GND
33	NC
34	NC
35	NC
36	NC
37	GND
38	GND
39	IOVCC
40	IOVCC



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2024.11.27		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0700CPT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	RITA	2024.11.27
VER.	REVISED DESCRIPTION	REVISER	DATE

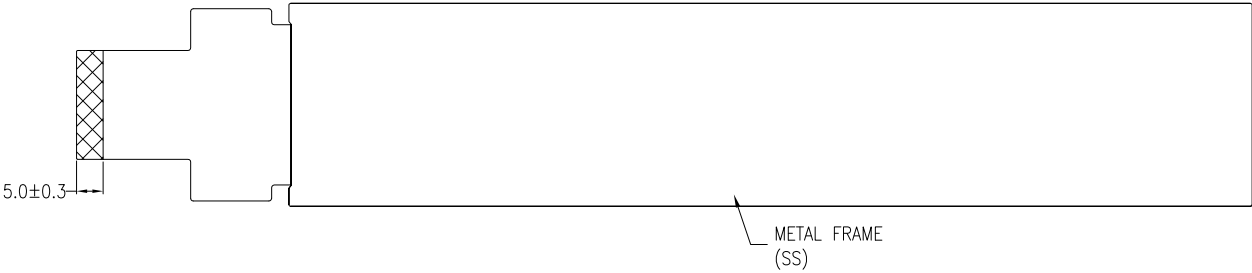

 MULTI-INNO TECHNOLOGY CO., LTD.				
DRAWN BY:	RITA	2024.11.27		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0700CPT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	RITA	2024.11.27
VER.	REVISED DESCRIPTION	REVISER	DATE