


NOTES:


1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: HX8664B+HX8264-D
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT TYPE: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VBL=5.0V
8. SURFACE LUMINANCE: 550CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. CN1 PADS RESERVD FOR RGB INTERFACE
CN2 FOR LVDS INTERFACE
11. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
12. GENERAL TOLERANCE: ±0.3MM
13. ROHS COMPLIANT



DETAIL A
(SCALE 40:1)

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI0700CQT-3
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	CAROL	2025.04.09
VER.	REVISED DESCRIPTION	REVISER	DATE

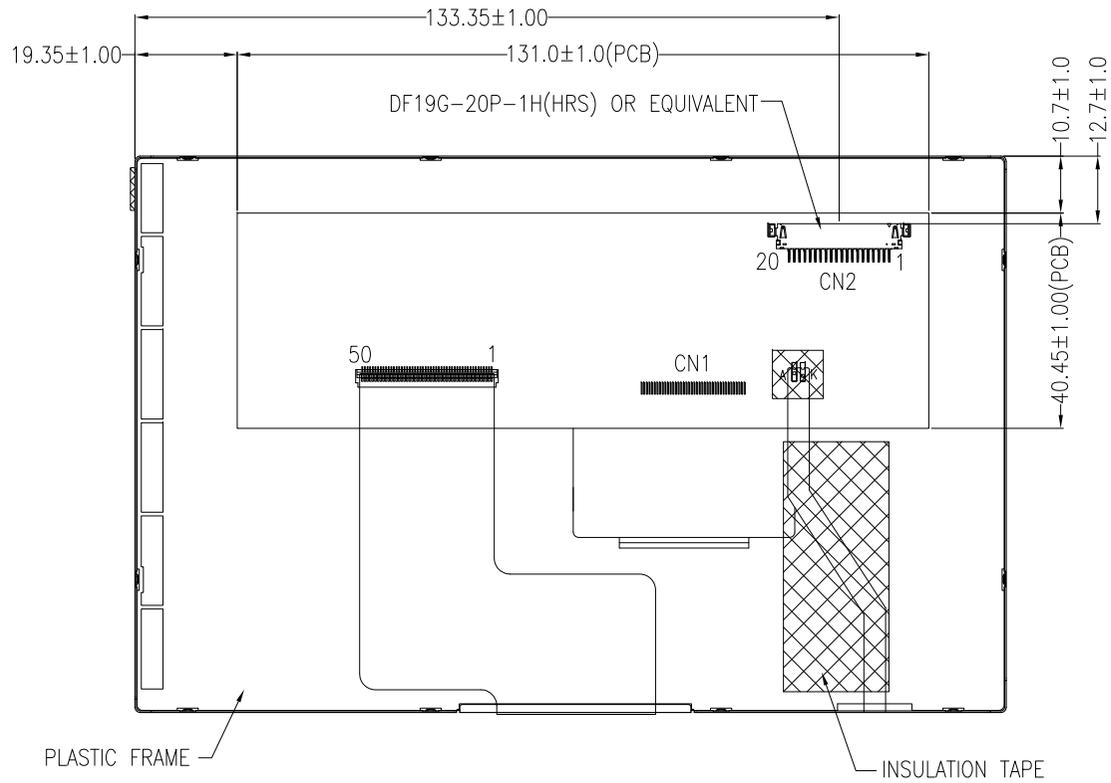

PIN DESCRIPTION	
PIN	SYMBOL
1	VCC
2	VCC
3	VSS
4	VSS
5	IN0-
6	IN0+
7	VSS
8	IN1-
9	IN1+
10	VSS
11	IN2-
12	IN2+
13	VSS
14	CLK-
15	CLK+
16	VSS
17	BL_ADJ
18	VBL
19	VSS
20	VSS



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI0700CQT-3
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2025.04.09
VER.	REVISED DESCRIPTION	REVISER	DATE