




PIN ASSIGNMENT FOR RTP		PIN ASSIGNMENT FOR LCM	
PIN NO	SYMBOL	PIN NO	SYMBOL
1	Y+	1	VCC
2	X-	2	VCC
3	Y-	3	VSS
4	X+	4	INO-
		5	INO+
		6	VSS
		7	IN1-
		8	IN1+
		9	VSS
		10	IN2-
		11	IN2+
		12	VSS
		13	CLK-
		14	CLK+
		15	VSS
		16	IN3-
		17	IN3+
		18	VSS
		19	BL_ADJ
		20	VBL



PIXEL PITCH



DETAIL A  
SCALE 3:1

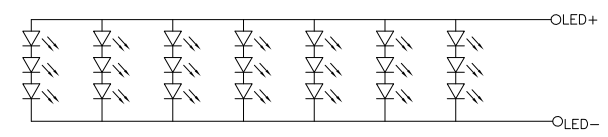

BACKLIGHT CIRCUIT DIGRAM

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
  2. OPERATING VOLTAGE: DVDD=3.3V (TYP.)
  3. VIEWING DIRECTION: 12:00 O'CLOCK
  4. DRIVER IC: HX8264-E00+HX8664-B00 OR EK9713CA+EK73002ACGB
  5. OPERATING TEMP.: -20°C ~ 70°C
  6. STORAGE TEMP.: -30°C ~ 80°C
  7. LED BACKLIGHT: 21-CHIP WHITE LED, If=140mA, Vf=9.6V±1.2V
  8. SURFACE LUMINANCE: 330CD/M<sup>2</sup> (TYP.)
  9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
  10. GENERAL TOLERANCE: ±0.3MM
  11. ROHS COMPLIANT

01	FIRST ISSUE	RITA	2021.08.09
VER.	REVISED DESCRIPTION	REVISER	DATE

<b>MULTI-INNO TECHNOLOGY CO., LTD.</b>			MODULE P/N:
		DRAWN BY: RITA 2021.08.09 CHECKED BY: APPROVED BY: VERSION NO: 01	SCALE : 1/1 UNIT: mm SHEET NO.: 1/1