
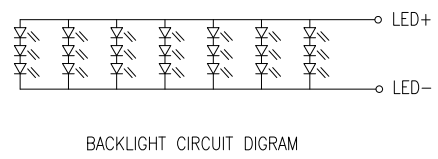
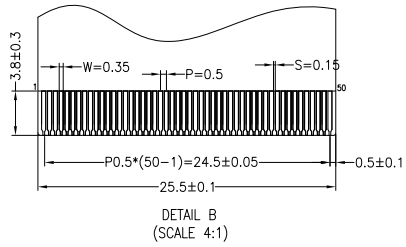

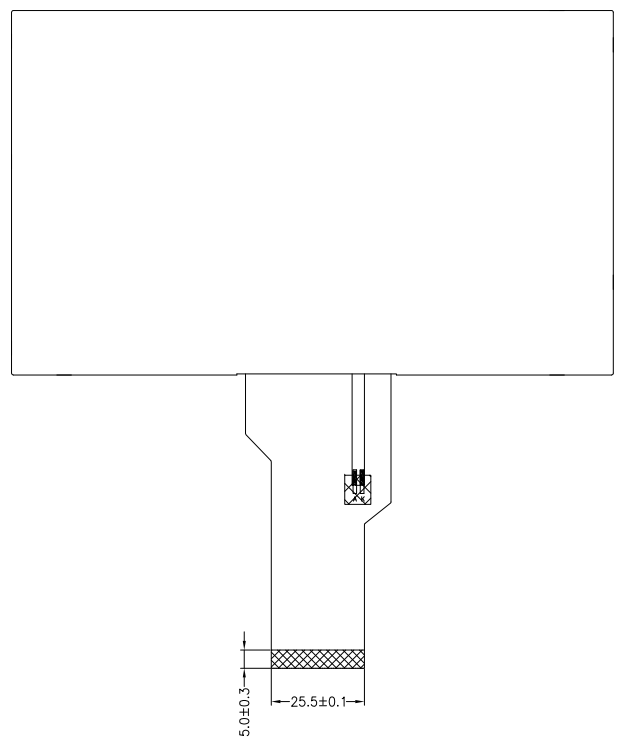
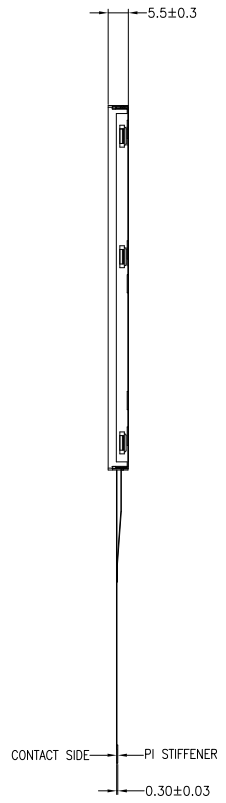


PIN ASSIGNMENT FOR LCD	
NO.	SYMBOL
1	LED+
2	LED+
3	LED-
4	LED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VCH
42	VCL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

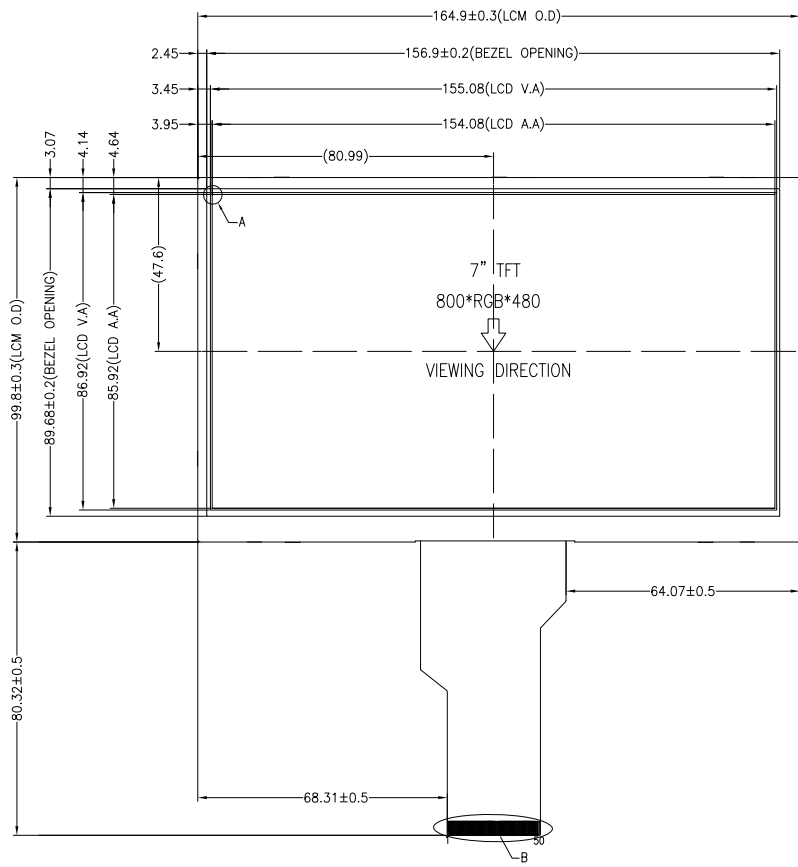

- NOTES:
1. DISPLAY TYPE: TFT/TRANSMISSIVE/NORMALLY WHITE
  2. OPERATING VOLTAGE: DVDD=3.3V
  3. VIEWING DIRECTION: 12 O'CLOCK
  4. DRIVER IC: HX8264-E00+HX8664-B00 OR EK9713CA+EK73002ACGB
  5. OPERATING TEMP.: -30°C ~ 85°C
  6. STORAGE TEMP.: -30°C ~ 85°C
  7. LED BACKLIGHT: 21-CHIP WHITE LED, IF=180mA, VF=9.6V±1.2V
  8. SURFACE LUMINANCE: 500CD/M<sup>2</sup>(TYP.)
  9. TREATMENT OF TOP SURFACE: ANTI-GLARE
  10. GENERAL TOLERANCE: ±0.3mm
  11. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO.,LTD.

NO.	REVISION DESCRIPTION	REVISOR	DATE	VERSION NO.	DRAWN BY:	CHECKED BY:	APPROVED BY:	SCALE :	UNIT:	DESCRIPTION:
04	MODIFY THE OPERATING TEMPERATURE	CAROL	2021.05.20		RITA			1/1	mm	MODULE P/N:
03	MODIFY THE IC DRIVER FROM HX8264-E00+HX8664 TO HX8264-E00+HX8664-B00 OR EK9713CA+EK73002ACGB	CAROL	2020.05.22							M10700S6T-8
02	CORRECT LED CURRENT FROM 140mA TO 180mA	RITA	2018.05.31							
01	CORRECT THE OPERATING TEMPERATURE	RITA	2018.05.04							
	FIRST ISSUE	RITA	2018.05.04							
	VER. REVISED DESCRIPTION	REVISOR	DATE	VERSION NO.	04			1/1	mm	TFT MODULE