
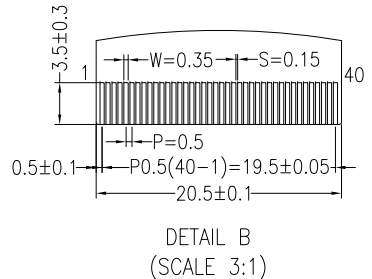


PIN DESCRIPTION	
PIN	SYMBOL
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABCEN1
37	CABCEN0
38	VGH
39	LED+
40	LED+



BACKLIGHT CIRCUIT DIAGRAM

- NOTES:
- DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
 - OPERATING VOLTAGE: VDD=3.3V (TYP.)
 - VIEWING DIRECTION: 12 O'CLOCK
 - DRIVER IC: HX8282+HX8677
 - OPERATING TEMP.: -20°C ~ 70°C
 - STORAGE TEMP.: -30°C ~ 80°C
 - LED BACKLIGHT: 27-CHIP WHITE LED, IF=180mA, VF=9.6V
 - SURFACE LUMINANCE: 500CD/M² (TYP.)
 - TOP POLARIZER SURFACE TREATMENT: GLARE
 - THE SINGLE LAYER AREA OF FPC IS BENDABLE AND THE BENDING RADIUS MUST BE NOT LESS THAN 1.5MM
 - GENERAL TOLERANCE: ±0.3MM
 - ROHS COMPLIANT

Mit MULTI-INNO TECHNOLOGY CO., LTD.

03	MODIFY THE DRIVER IC	CAROL	2020.09.18	DRAWN BY:	CAROL	2015.01.06		MODULE P/N:
02	MODIFY MODULE THICKNESS	CAROL	2016.02.24	CHECKED BY:			SCALE : 1/1	MIO700XT-19
01	FIRST ISSUE	CAROL	2021.05.17	APPROVED BY:			UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	03		SHEET NO.: 1/1	TFT MODULE