




PIN	SYMBOL	DESCRIPTION
1	VCOM	
2	VDD	
3	VDD	
4	NC	
5	RESET	
6	STBYB	
7	GND	
8	RXIN0-	
9	RXIN0+	
10	GND	
11	RXIN1-	
12	RXIN1+	
13	GND	
14	RXIN2-	
15	RXIN2+	
16	GND	
17	RXCLKIN-	
18	RXCLKIN+	
19	GND	
20	RXIN3-	
21	RXIN3+	
22	GND	
23	NC	
24	NC	
25	GND	
26	NC	
27	DIMO	
28	SELB	
29	AVDD	
30	GND	
31	LED-	
32	LED-	
33	L/R	
34	U/D	
35	VGL	
36	CABCEN1	
37	CABCEN0	
38	VGH	
39	LED+	
40	LED+	

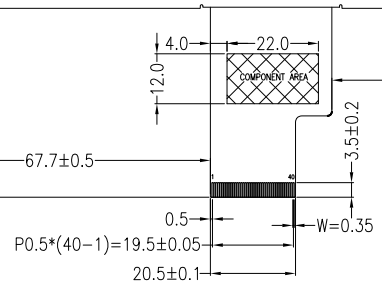

DETAIL A
(SCALE 30:1)



BACKLIGHT CTRCUIT DIAGRAM

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
 2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
 3. VIEWING DIRECTION: 12 O'CLOCK
 4. DRIVER IC: NT51008CH-D + NT52002H-D
 5. OPERATING TEMP.: -20°C ~ 70°C
 6. STORAGE TEMP.: -30°C ~ 80°C
 7. LED BACKLIGHT: 28-CHIP WHITE LED, IF=160mA, VF=18.9V~23.8V
 8. SURFACE LUMINANCE: 1200CD/M² (TYP.)
 9. TOP POLARIZER SURFACE TREATMENT: GLARE
 10. GENERAL TOLERANCE: ±0.3MM
 11. ROHS COMPLIANT

Mi MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2018.07.23		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MIO700XT-23
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE

01	FIRST ISSUE	RITA	2018.07.23
VER.	REVISED DESCRIPTION	REVISER	DATE