


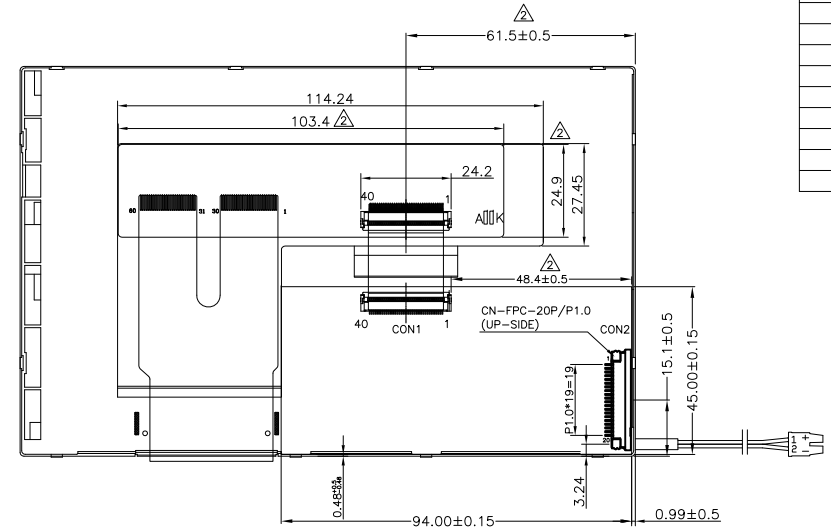


CON2 PIN ASSIGNMENT	
PIN NO.	SYMBOL
1	GND
2	VDD
3	NC
4	D/C
5	WR
6	RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS
16	NC
17	NC
18	RST
19	NC
20	NC

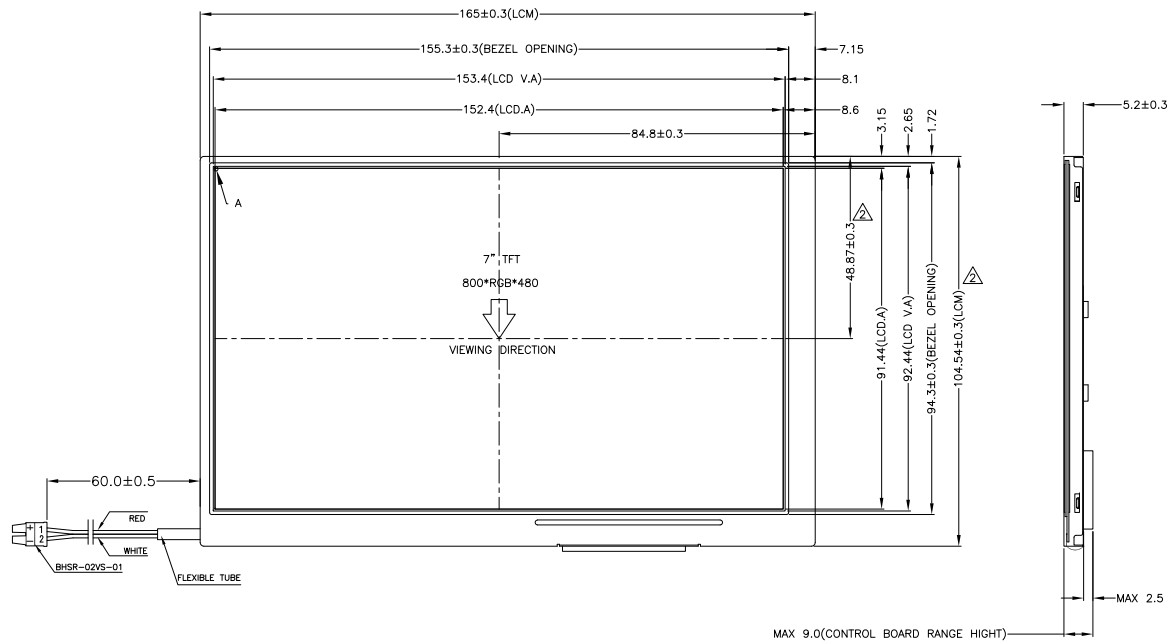

DETAIL A  
(SCALE 40:1)



BACKLIGHT CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT/TRANSMISSIVE/NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: 12:00 O'CLOCK
4. DRIVER IC: SSD1963
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT: 24-CHIP WHITE LED, IF=160mA, VF=9.8V
8. SURFACE LUMINANCE: 460CD/M<sup>2</sup>(TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.3mm
11. ROHS COMPLIANT

02	MODIFY THE DIMENSIONS OF LCM O.D AND PCB	CAROL	2018.04.19
01	FIRST ISSUE	CAROL	2014.03.10
VER.	REVISED DESCRIPTION	REVISER	DATE

<b>MULTI-INNO TECHNOLOGY CO., LTD.</b>		DRAWN BY: CAROL 2014.03.10		MODULE P/N: MI0700YT-9
		CHECKED BY:	SCALE : 1/1	DESCRIPTION: TFT MODULE
APPROVED BY:	UNIT: mm	VERSION NO: 02	SHEET NO.: 1/1	