


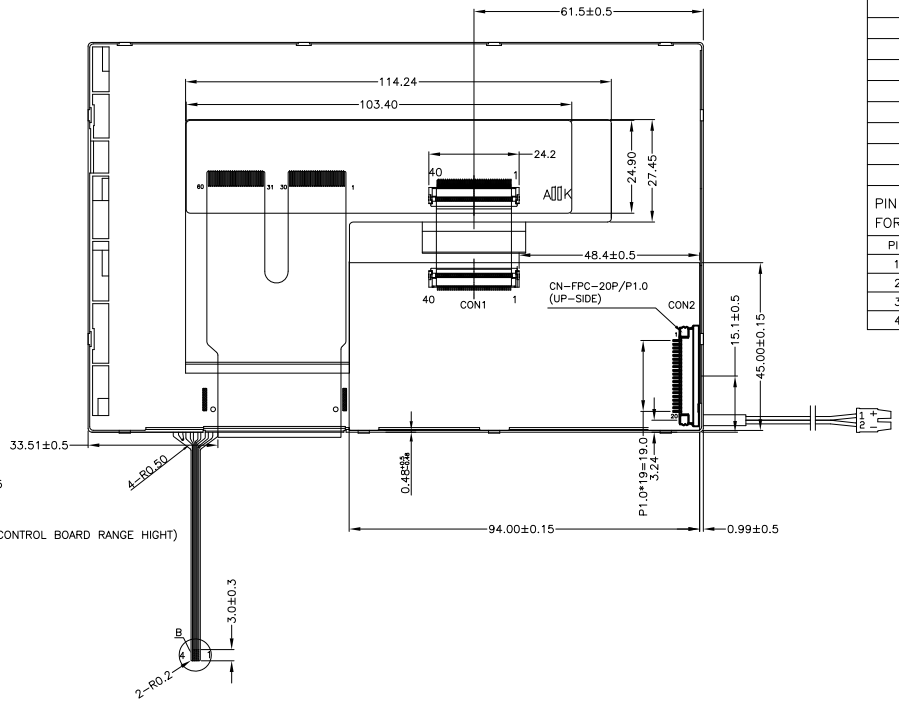
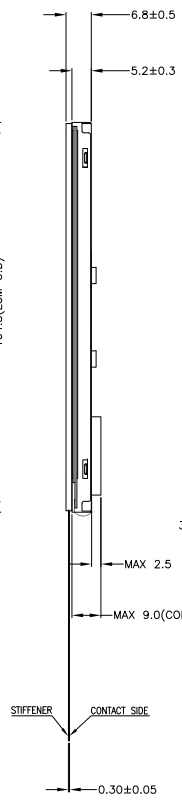


CON2 PIN ASSIGNMENT FOR LCM:	
PIN NO.	SYMBOL
1	GND
2	VDD
3	NC
4	D/C
5	WR
6	RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS
16	NC
17	NC
18	RST
19	NC
20	NC


PIN ASSIGNMENT FOR RTP:	
PIN	SYMBOL
1	YU
2	XL
3	YD
4	XR

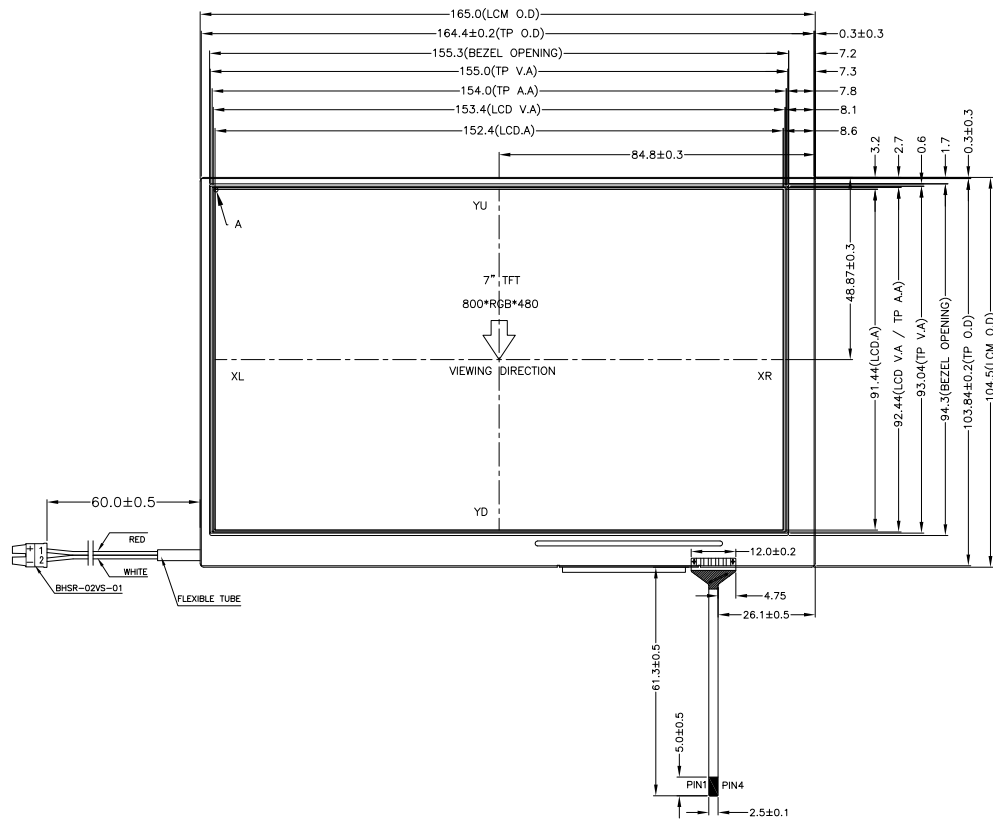

DETAIL A
(SCALE 40:1)



DETAIL B
(SCALE 3:1)



BACKLIGHT CIRCUIT DIAGRAM

- NOTES:
1. DISPLAY TYPE: TFT/TRANSMISSIVE/NORMALLY WHITE.
 2. OPERATING VOLTAGE: VDD=3.3V.
 3. VIEWING DIRECTION: 12:00 O'CLOCK.
 4. DRIVER IC: SSD1963.
 5. OPERATING TEMP.: -20~70°.
 6. STORAGE TEMP.: -30~80°.
 7. BACKLIGHT: 24-CHIP WHITE LED, IF=160mA, VF=8.4V~11.0V.
 8. SURFACE LUMINANCE: 360CD/M²(TYP.).
 9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
 10. GENERAL TOLERANCE: ±0.3mm.
 11. ROHS COMPLIANT.

01	FIRST ISSUE	CAROL	2018.09.28
VER.	REVISED DESCRIPTION	REVISER	DATE

MULTI-INNO TECHNOLOGY CO., LTD.		DRAWN BY: CAROL 2018.09.28		MODULE P/N: MI0700YT-9RP
		CHECKED BY:	SCALE : 1/1	DESCRIPTION: TFT & RTP MODULE
APPROVED BY:	UNIT: mm	SHEET NO.: 1/1		
VERSION NO: 01				