

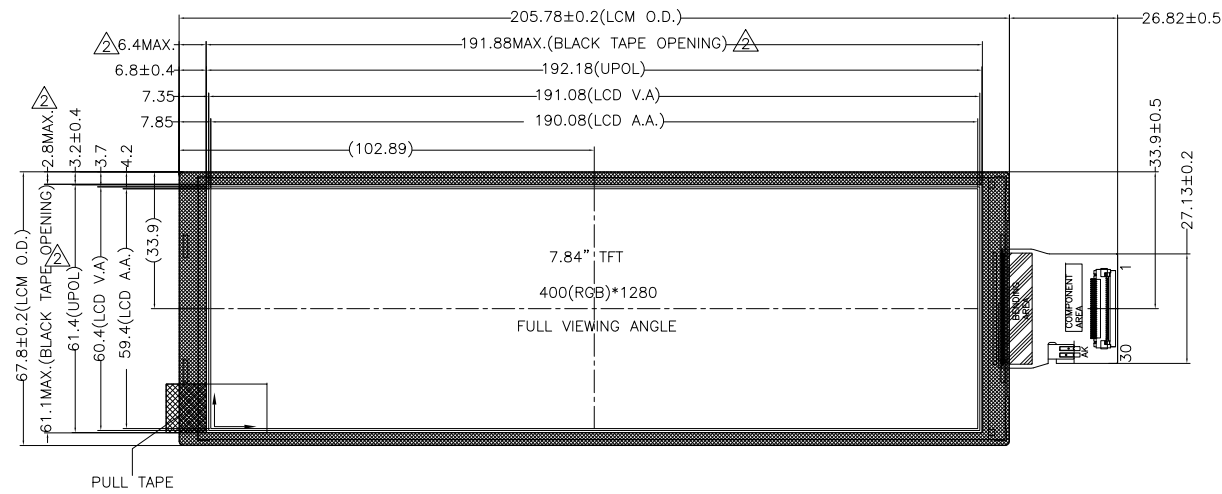



PIXEL DETAIL
(SCALE 80:1)

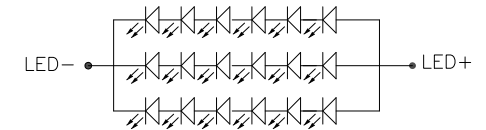

CON1 MATED FPC/FFC STYLE
(SCALE 2:1)

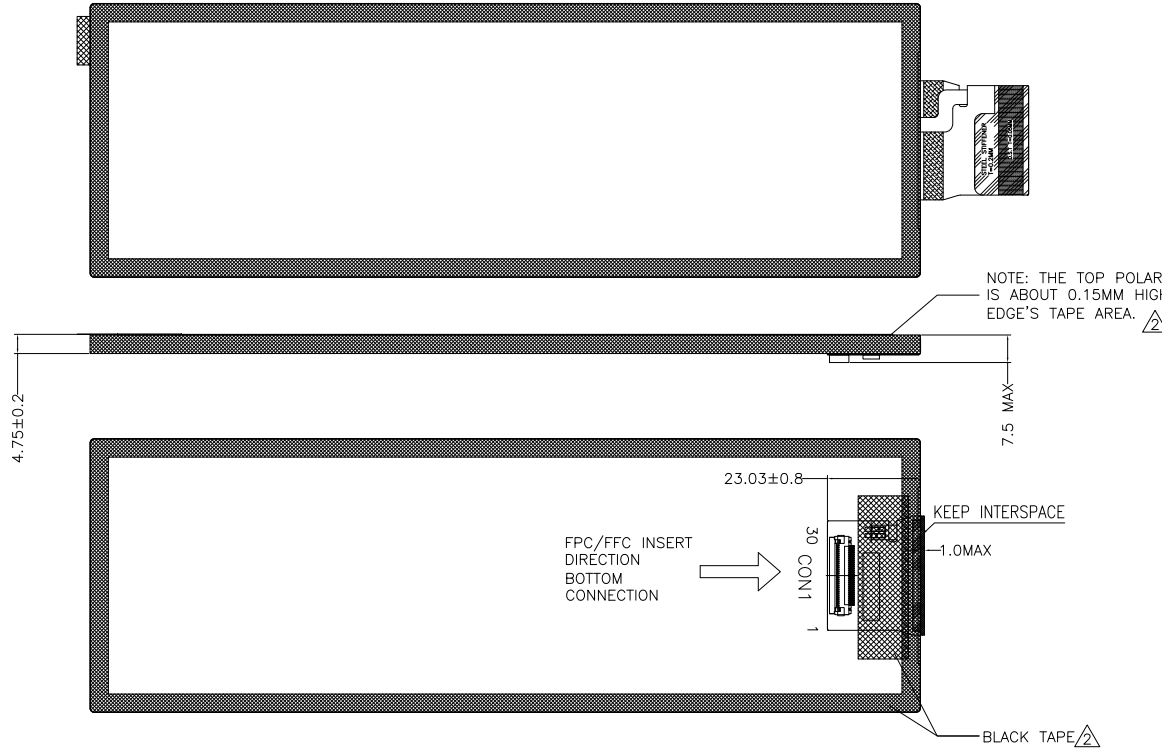

BACKLIGHT CIRCUIT DIAGRAM

NOTES FOR TFT:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. IC DRIVER: NV3051F1
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT: 18-CHIP WHITE LED, I_f=160mA, V_f=18V
8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
9. SURFACE LUMINANCE: 850 CD/M²(TYP.)
10. GENERAL TOLERANCE: ±0.3MM
11. ROHS COMPLIANT

03	CORRECT THE IC DRIVER P/N.	RITA	2021.09.24
02	OPTIMIZATION THE DRAWING.	RITA	2020.09.11
01	FIRST ISSUE	RITA	2020.08.10
VER.	REVISED DESCRIPTION	REVISER	DATE

MULTI-INNO TECHNOLOGY CO., LTD.				MODULE P/N:	
DRAWN BY:	RITA	2020.08.10		SCALE : 1/1	MI0784BT-2
CHECKED BY:				UNIT: mm	DESCRIPTION:
APPROVED BY:				SHEET NO.: 1/1	TFT MODULE
VERSION NO:	03				

PIN	ASSIGNMENT
NO.	SYMBOL
1	LEDA
2	LEDA
3	LEDA
4	NC
5	LEDK
6	LEDK
7	LEDK
8	LEDK
9	GND
10	GND
11	MIPI_D3-
12	MIPI_D3+
13	GND
14	MIPI_D2-
15	MIPI_D2+
16	GND
17	MIPI_CLK-
18	MIPI_CLK+
19	GND
20	MIPI_D1-
21	MIPI_D1+
22	GND
23	MIPI_D0-
24	MIPI_D0+
25	GND
26	LCD_ID1
27	RESET
28	NC
29	IOVCC
30	VCI