


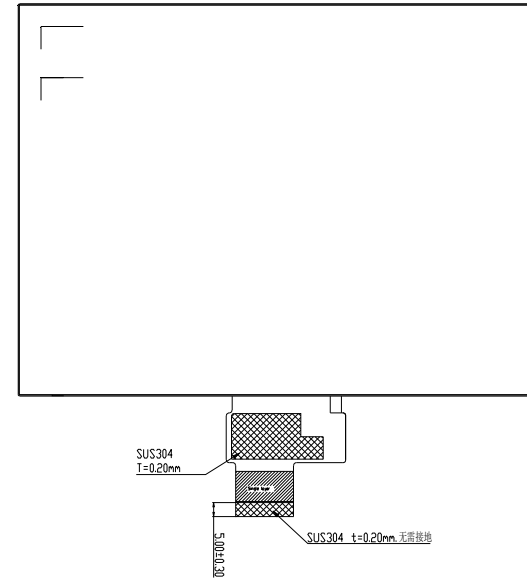


PIN DESCRIPTION	
PIN	SYMBOL
1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABCEN1
37	CABCEN0
38	VGH
39	LED+
40	LED+

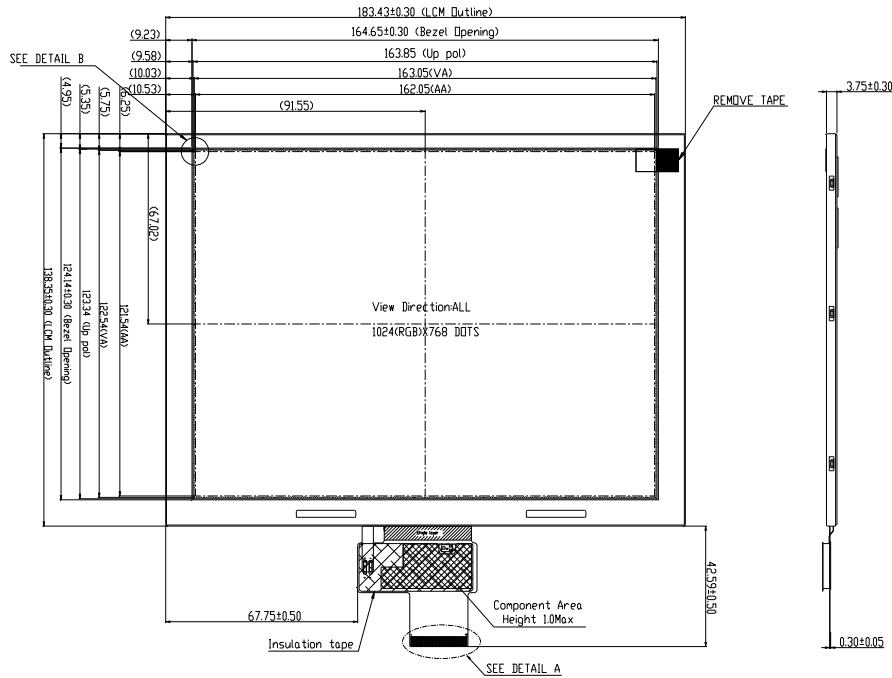

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: RM51150+HX8684B
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, IF=180mA, VF=8.4V~10.2V
8. SURFACE LUMINANCE: 580CD/M<sup>2</sup> (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: HC
10. RECOMMEND MATCHING CONNECTOR: FH12A-40S-0.5SH OR EQUIVALENT
11. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
12. GENERAL TOLERANCE: ±0.3MM
13. ROHS COMPLIANT

<b>MULTI-INNO TECHNOLOGY CO., LTD.</b>			
DRAWN BY:	CAROL	2022.04.17	MODULE P/N:
CHECKED BY:			MI0800ALT-1
APPROVED BY:			DESCRIPTION:
VER.	FIRST ISSUE	CAROL	TFT MODULE
REVISOR	DATE	VERSION NO:	
		01	
			SHEET NO.: 1/1

01	FIRST ISSUE	CAROL	2022.04.17	APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISOR	DATE	VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE