


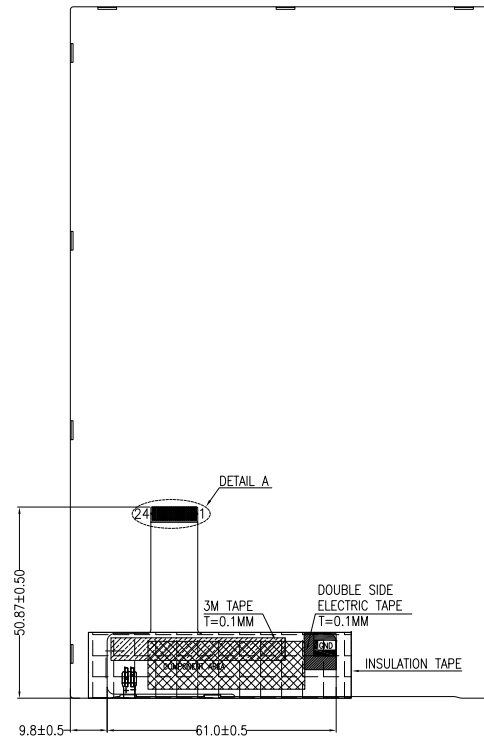
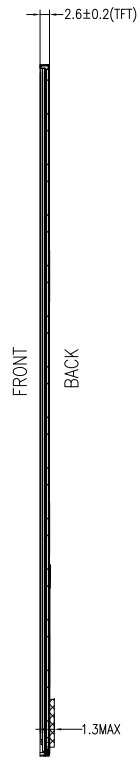



PIN ASSIGNMENT	
PIN	SYMBOL
1	GND
2	LEDK
3	RESET
4	TE
5	VDD
6	IOVCC
7	LCD_ID
8	GND
9	MIPI_D2N
10	MIPI_D2P
11	GND
12	GND
13	GND
14	LEDA
15	GND
16	MIPI_CLKP
17	MIPI_CLKN
18	GND
19	MIPI_D0N
20	MIPI_D0P
21	GND
22	MIPI_D1N
23	MIPI_D1P
24	GND

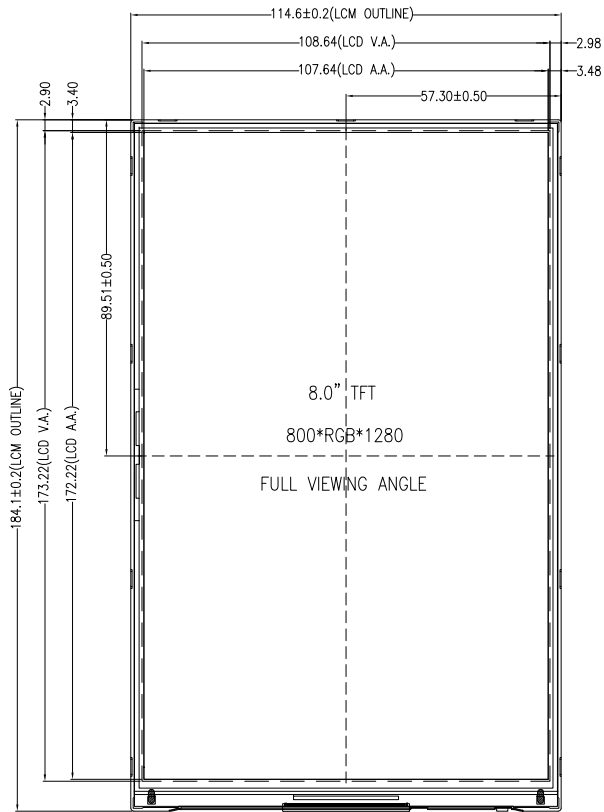


PIXEL DETAIL
(SCALE 100:1)



DETAIL A
(SCALE 3:1)



DETAIL A SIDE VIEW
(SCALE 3:1)



BACKLIGHT CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=2.8V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: ILI9881C
5. OPERATING TEMP.: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
6. STORAGE TEMP.: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$
7. LED BACKLIGHT: WHITE LED, IF=81mA, Vf=21.7V $\pm$ 2.1V.
8. SURFACE LUMINANCE: 560CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: $\pm 0.3 \text{ MM}$
11. ROHS COMPLIANT



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	JERRY	2024.04.08		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0800AMT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE

01	FIRST ISSUE	JERRY	2024.04.08
VER.	REVISED DESCRIPTION	REVISOR	DATE