


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDDA=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: -
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -30°C ~ 85°C
7. LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VLED=12V
8. SURFACE LUMINANCE: 700 CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. CN1: IPEX-20765-040E-11A OR COMPATIBLE
11. CN2: FI-S6P-HFE OR COMPATIBLE
12. GENERAL TOLERANCE: ±0.40MM
13. ROHS COMPLIANT

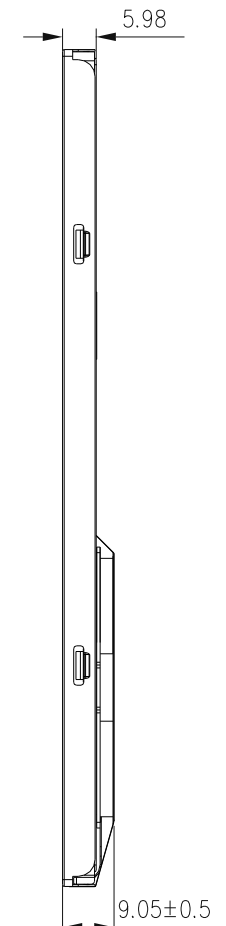

PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	GND
2	GND
3	GND
4	NC
5	NC
6	NC
7	NC
8	GND
9	NC
10	GND
11	GRB
12	GND
13	NIND3-
14	PIND3+
15	GND
16	NIND2-
17	PIND2+
18	GND
19	NIND1-
20	PIND1+
21	GND
22	NIND0-
23	PIND0+
24	GND
25	CLKN-
26	CLKP+
27	GND
28	NC
29	NC
30	GND
31	SHLR
32	UPDN
33	GND
34	NC
35	GND
36	LVBIT
37	NC
38	GND
39	VDDA
40	VDDA

PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	VLED
2	VLED
3	GND
4	GND
5	ENABLE
6	DIMMING




MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2023.03.11		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0840MT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	CAROL	2023.03.11
VER.	REVISED DESCRIPTION	REVISER	DATE



DRAWN BY:	CAROL 2023.03.11		MODULE P/N: MI0840MT-1
CHECKED BY:		SCALE : 1/1	
11 APPROVED BY:		UNIT: mm	DESCRIPTION: TFT MODULE
VERSION NO:	01	SHEET NO.: 2/2	