



PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	VDD
2	VDD
3	UD
4	LR
5	RxIN1-
6	RxIN1+
7	GND
8	RxIN2-
9	RxIN2+
10	GND
11	RxIN3-
12	RxIN3+
13	GND
14	RxCLKIN-
15	RxCLKIN+
16	GND
17	SEL68
18	NC
19	RxIN4-
20	RxIN4+

PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	VCC
2	GND
3	Display_ON/OFF
4	X1



PIN DESCRIPTION FOR CN3	
PIN	SYMBOL
1	AN1, RED
2	CA1, BLACK
3	CA2, BLACK



NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: 6 O'CLOCK
4. DRIVER IC: -
5. OPERATING TEMP.: -30°C ~ 80°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VCC=12.0V
8. SURFACE LUMINANCE: 450CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.4MM
11. ROHS COMPLIANT

 MULTI-INNO TECHNOLOGY CO., LTD.			MODULE P/N:
		DRAWN BY: CAROL 2023.03.18	SCALE : 1/1
CHECKED BY:	APPROVED BY:	UNIT: mm	DESCRIPTION:
VER. 01 FIRST ISSUE	REVISER CAROL DATE 2023.03.18	VERSION NO: 01	SHEET NO.: 1/2 TFT MODULE

01	FIRST ISSUE	CAROL	2023.03.18
VER.	REVISED DESCRIPTION	REVISER	DATE

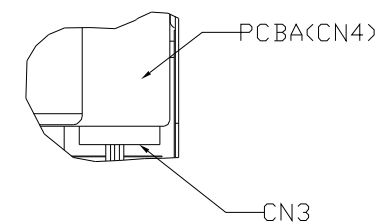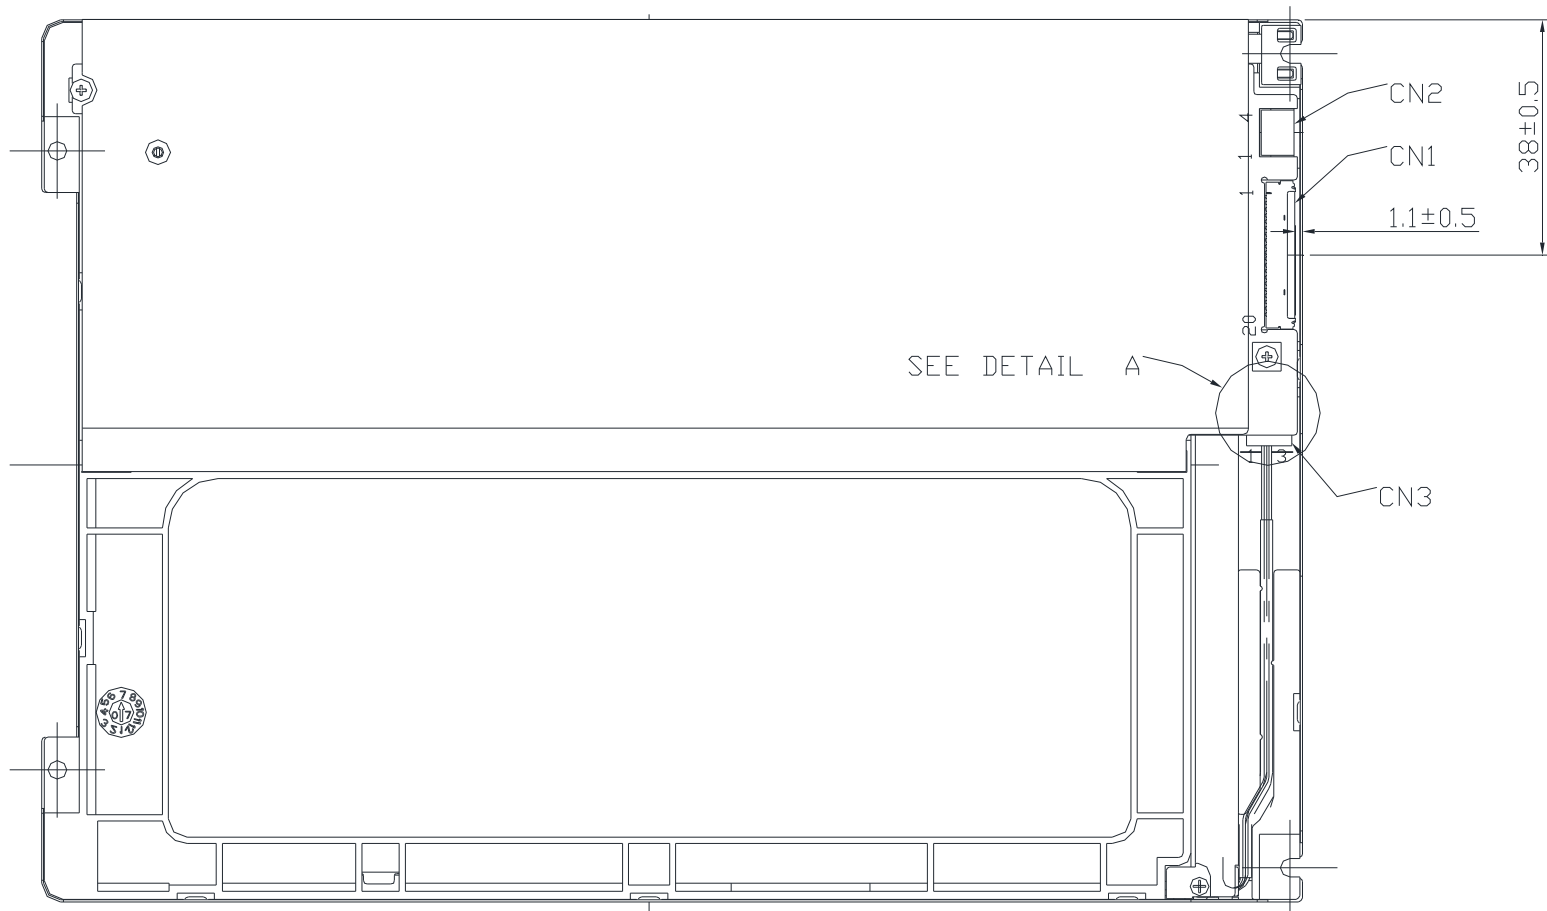

 MULTI-INNO TECHNOLOGY CO., LTD.			MODULE P/N:			
		DRAWN BY: CAROL 2023.03.18 CHECKED BY:	SCALE : 1/1	MI0840NT-1		
01	FIRST ISSUE	CAROL	2023.03.18	APPROVED BY:	UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	SHEET NO.: 2/2	TFT MODULE