


DETAIL A
SCALE 100:1

PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	GND
2	VCC
3	VCC
4	V_EEDID
5	GSP
6	CLK_EEDID
7	DATA_EEDID
8	RIN0-
9	RIN0+
10	GND
11	RIN1-
12	RIN1+
13	GND
14	RIN2-
15	RIN2+
16	GND
17	CLKIN-
18	CLKIN+
19	GND
20	NC
21	Vdc
22	Vdc
23	NC
24	Vdc1
25	Vdc2
26	Vdc3
27	Vdc4
28	Vdc5
29	Vdc6
30	NC


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VCC=3.3V
3. VIEWING DIRECTION: 12:00 O'CLOCK
4. DRIVER IC: NT51008/NT39212
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: 36-CHIP WHITE LED, If=120mA, Vf=18.0V~21.6V
8. SURFACE LUMINANCE: 350CD/M²(TYP.)
9. TOP POLARIZER SURFACE TREATMENT: GLARE
10. MATCHED CONNECTOR:
CN1: I-PEX 20474-030E
CN2: KYOCERA-046298609100883
11. GENERAL TOLERANCE: ±0.3MM
12. ROHS COMPLIANT

 MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2022.01.10		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0970A2T-3
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	RITA	2022.01.10
VER.	REVISED DESCRIPTION	REVISER	DATE

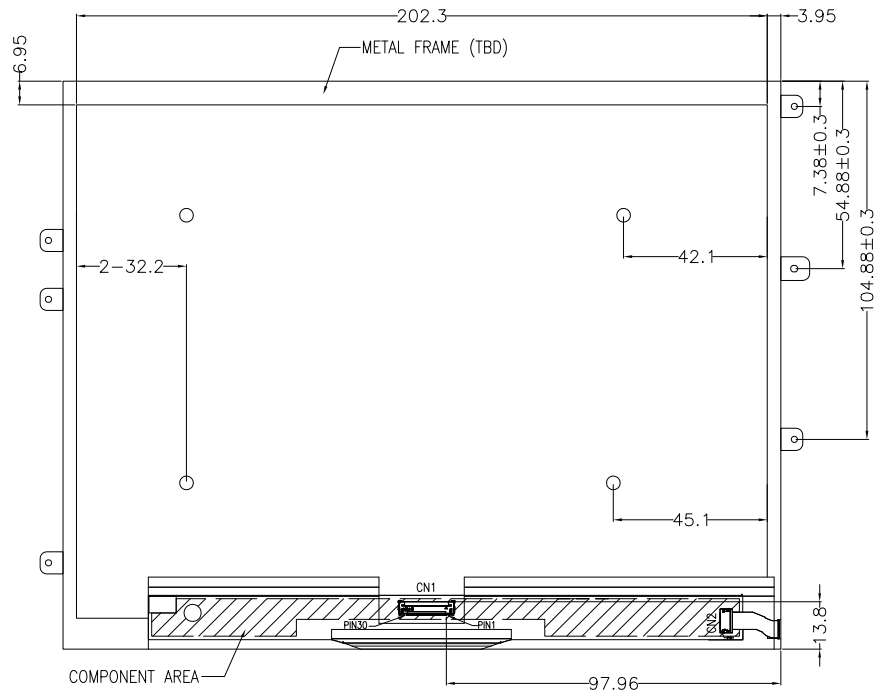

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2022.01.10		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI0970A2T-3
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	RITA	2022.01.10
VER.	REVISED DESCRIPTION	REVISER	DATE