

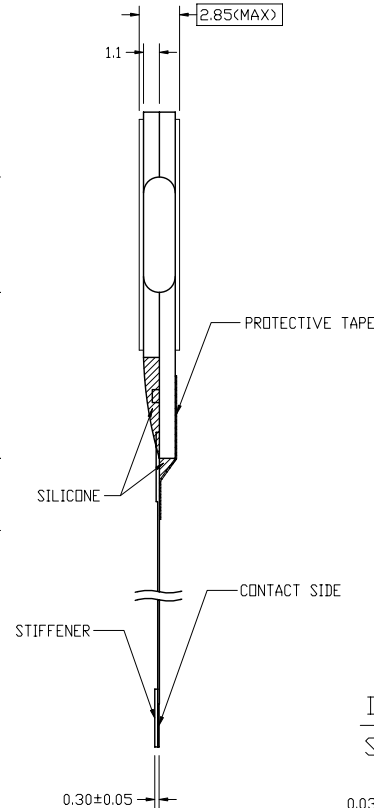


1	V4
2	V3
3	V2
4	V1
5	V0
6	VR
7	C2-
8	C2+
9	C1-
10	C1+
11	C3+
12	VOUT
13	VSS
14	SID
15	SCLK
16	VDD
17	RS
18	CS1B
19	RESETB
20	NC



DETAIL A:
SCALE 6:1

DETAIL B:
SCALE 4:1



NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: REFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/33 DUTY 1/6 BIAS
5. LCD OPERATING VOLTAGE: 7.0V
RECOMMEND: VDD= 3.0V
6. OPERATING TEMP: -20°C~+60°C
7. STORAGE TEMP: -30°C~+70°C
8. IC: ST7565R
9. WITHOUT BACKLIGHT
10. UNMARKED TOLERANCE: ±0.3mm
11. THE CONTROLLED DIMENSIONS MASK TO BE
12. REQUIREMENT ON ENVIRONMENTAL PROTECTION:RoHS

CUSTOMER APVL	CUSTOMER	DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI10032A-G-2	
ENGR CHK	mm	MODEL	
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE
			1/1