
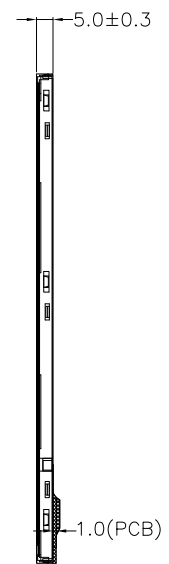
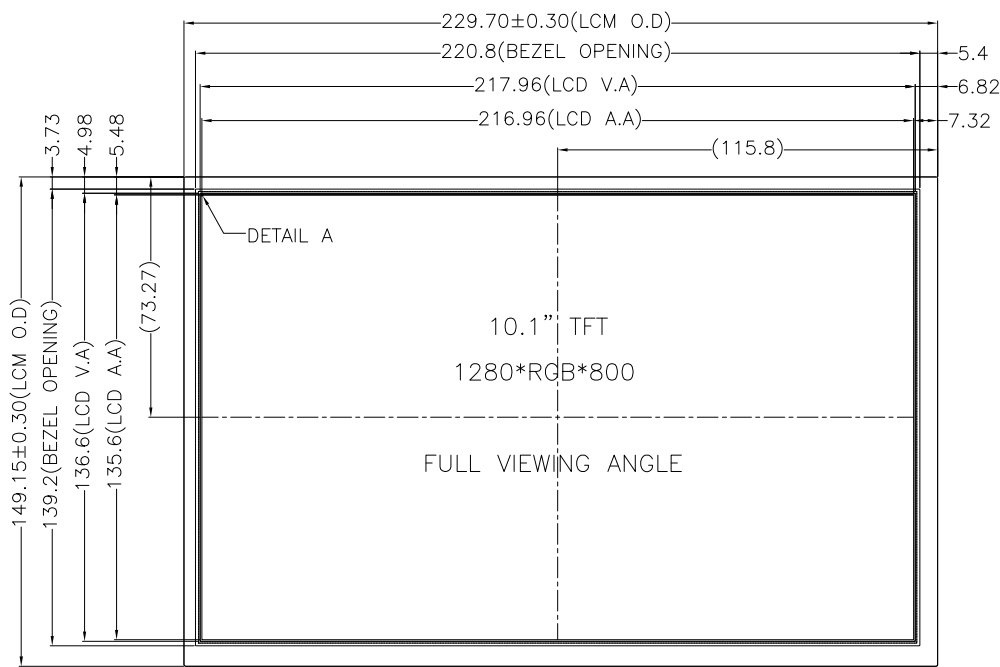


PIN ASSIGNMENT FOR LCM:	
No.	Symbol
1	GND1
2	ID_CHK
3	NC
4	VDD(3.3V)
5	VDD(3.3V)
6	VDD(3.3V)
7	VDD(3.3V)
8	VDD(3.3V)
9	WPN
10	SCL
11	SDA
12	GND2
13	GND3
14	GND4
15	RXIN3N
16	RXIN3P
17	GND5
18	LVDS_RX_N
19	LVDS_RX_P
20	GND6
21	RXIN2N
22	RXIN2P
23	GND7
24	RXIN1N
25	RXIN1P
26	GND8
27	RXIN0N
28	RXIN0P
29	GND9
30	GND10
31	NC
32	LEDK
33	LEDK
34	LEDK
35	LEDK
36	NC
37	NC
38	NC
39	LEDA
40	LEDA
41	LEDA
42	LEDA
43	LEDA
44	NC
45	GND11







DETAIL A
SCALE 40:1

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. IC DRIVER: HX8245 + HX8695
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT: 36-CHIP WHITE LED, If=225mA, Vf=10.8V~13.6V
8. SURFACE LUMINANCE: 600CD/M²(TYP)
9. TOP POLARIZER SURFACE TREATMENT: GLARE
10. GENERAL TOLERANCE: ±0.3MM
11. ROHS COMPLIANT

02	CORRECT THE OPERATING TEMP. FROM -20°C ~ 60°C TO -20°C ~ 70°C. CORRECT THE STORAGE TEMP. FROM -20°C ~ 80°C TO -30°C ~ 80°C.	CAROL	2019.05.06
01	FIRST ISSUE	RITA	2019.04.09
VER.	REVISED DESCRIPTION	REVISER	DATE

 MULTI-INNO TECHNOLOGY CO.,LTD.			
DRAWN BY:	RITA 2019.04.09		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI1010AAT-3
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	02	SHEET NO.: 1/2	TFT MODULE

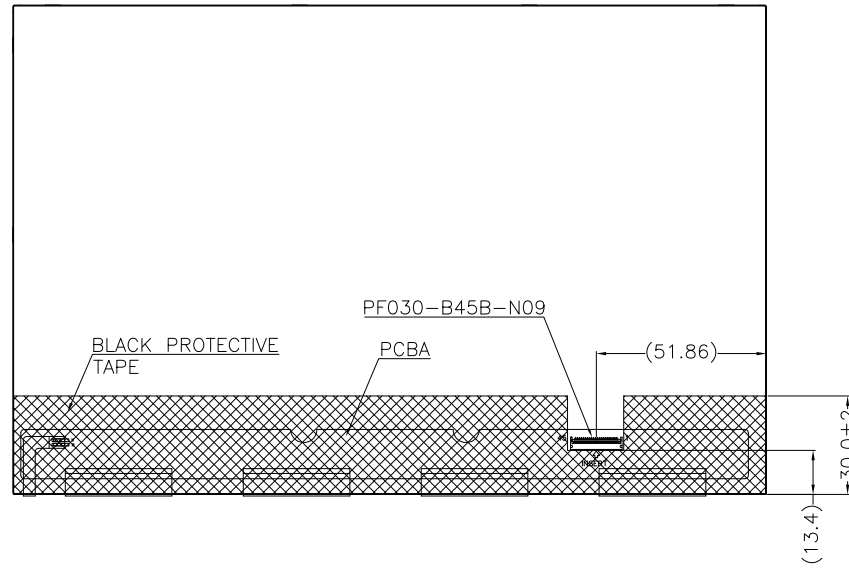

BACKLIGHT CIRCUIT DIAGRAM



MULTI-INNO TECHNOLOGY CO.,LTD.

02	CORRECT THE OPERATING TEMP. FROM -20°C ~ 60°C TO -20°C ~ 70°C. CORRECT THE STORAGE TEMP. FROM -20°C ~ 80°C TO -30°C ~ 80°C.	CAROL	2019.05.06	DRAWN BY:	RITA 2019.04.09		MODULE P/N:
01	FIRST ISSUE	RITA	2019.04.09	CHECKED BY:		SCALE : 1/1	MI1010AAT-3
VER.	REVISED DESCRIPTION	REVISER	DATE	APPROVED BY:		UNIT: mm	DESCRIPTION:
				VERSION NO:	02	SHEET NO.: 2/2	TFT MODULE