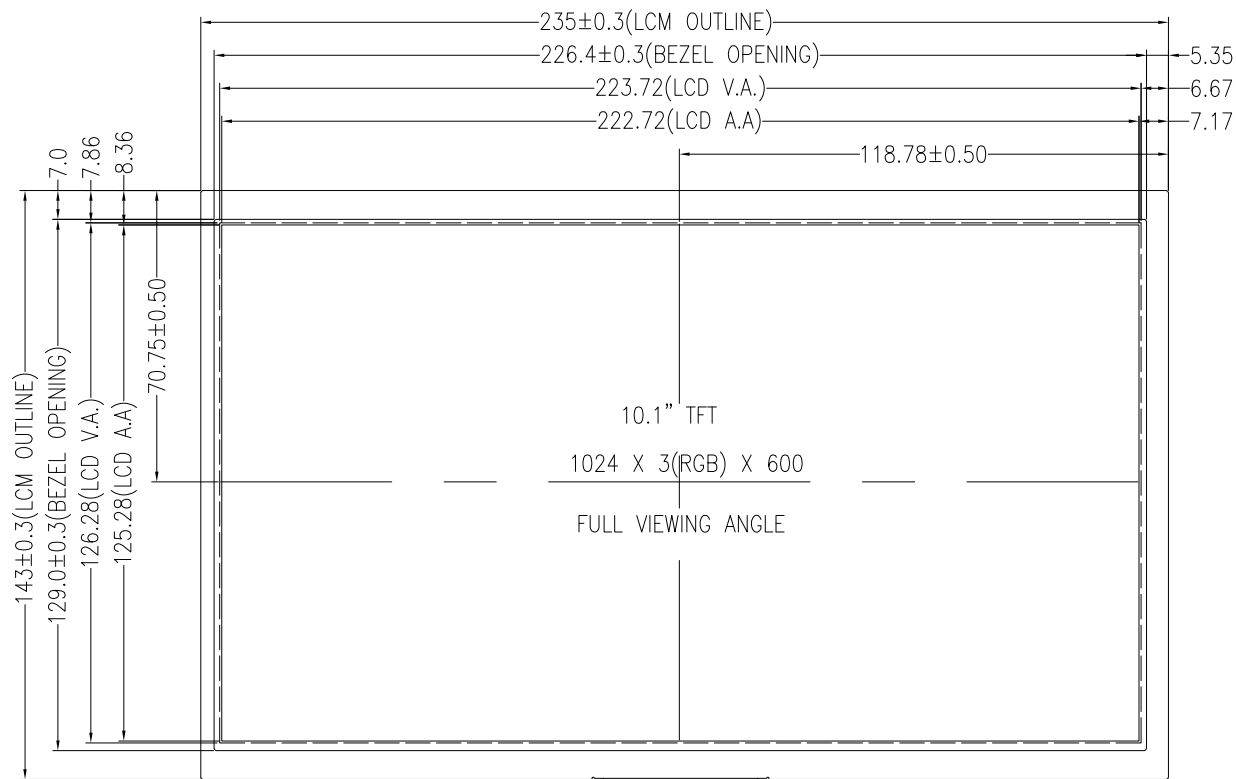


PIXEL DETAIL
(SCALE 80:1)


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: EK79001H + EK73215BCGA
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT TYPE: WHITE LED BUILT-IN BACKLIGHT DRIVER: VLED=5.0V
8. SURFACE LUMINANCE: 480CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. UNMARKED TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

PIN ASSIGNMENT FOR LCM	
PIN	SYMBOL
1	VCC
2	VCC
3	VSS
4	VSS
5	RIN0-
6	RIN0+
7	VSS
8	RIN1-
9	RIN1+
10	VSS
11	RIN2-
12	RIN2+
13	VSS
14	RCLK-
15	RCLK+
16	VSS
17	RIN3-
18	RIN3+
19	VSS
20	VLED
21	VLED
22	ADJ
23	SELB
24	VSS
25	NC(VTP_VDD)
26	NC(CTP_GND)
27	NC(CTP_SCL)
28	NC(CTP_SDA)
29	NC(CTP_INT)
30	NC(CTP_RST)

 MULTI-INNO TECHNOLOGY CO., LTD.				
DRAWN BY:		RITA	2025.03.25	 MODULE P/N: MI1010AKT-6
CHECKED BY:				
25	APPROVED BY:			SCALE : 1/1
				UNIT: mm
VERSION NO:		01		DESCRIPTION: TFT MODULE
			SHEET NO.: 1/2	

01	FIRST ISSUE	RITA	2025.03.25
VER.	REVISED DESCRIPTION	REVISER	DATE

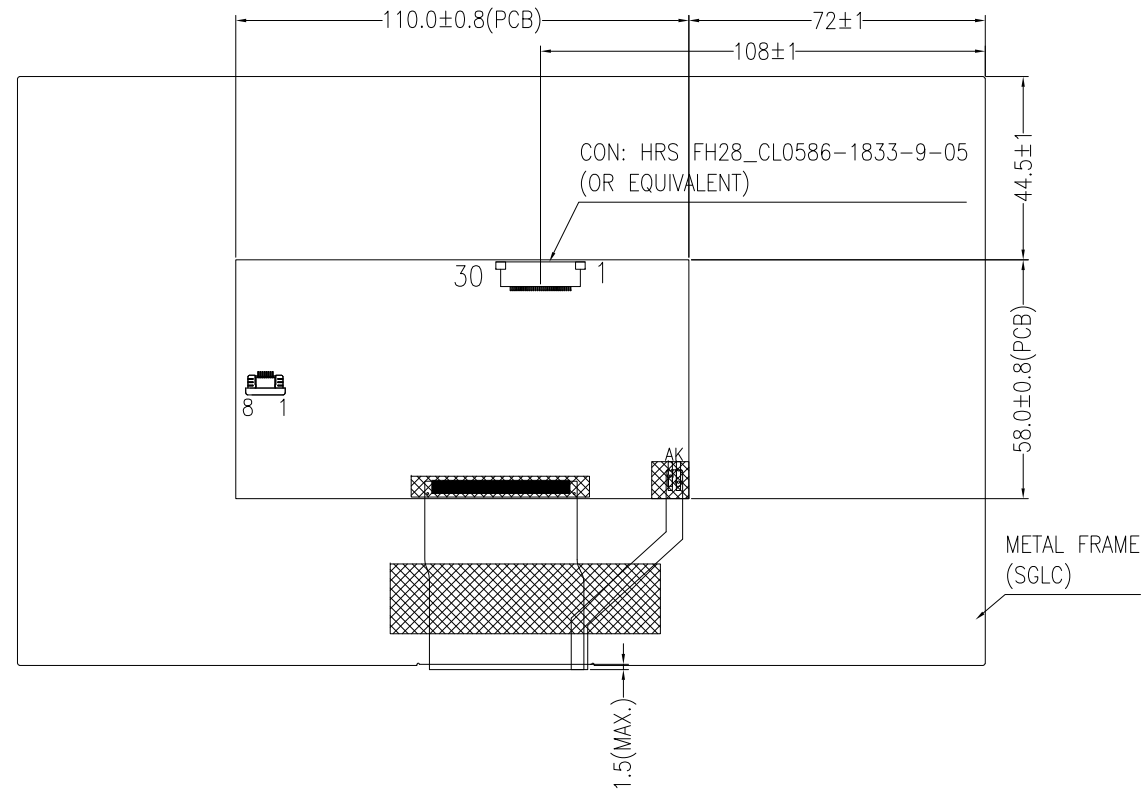

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2025.03.25		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1010AKT-6
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	RITA	2025.03.25
VER.	REVISED DESCRIPTION	REVISER	DATE