
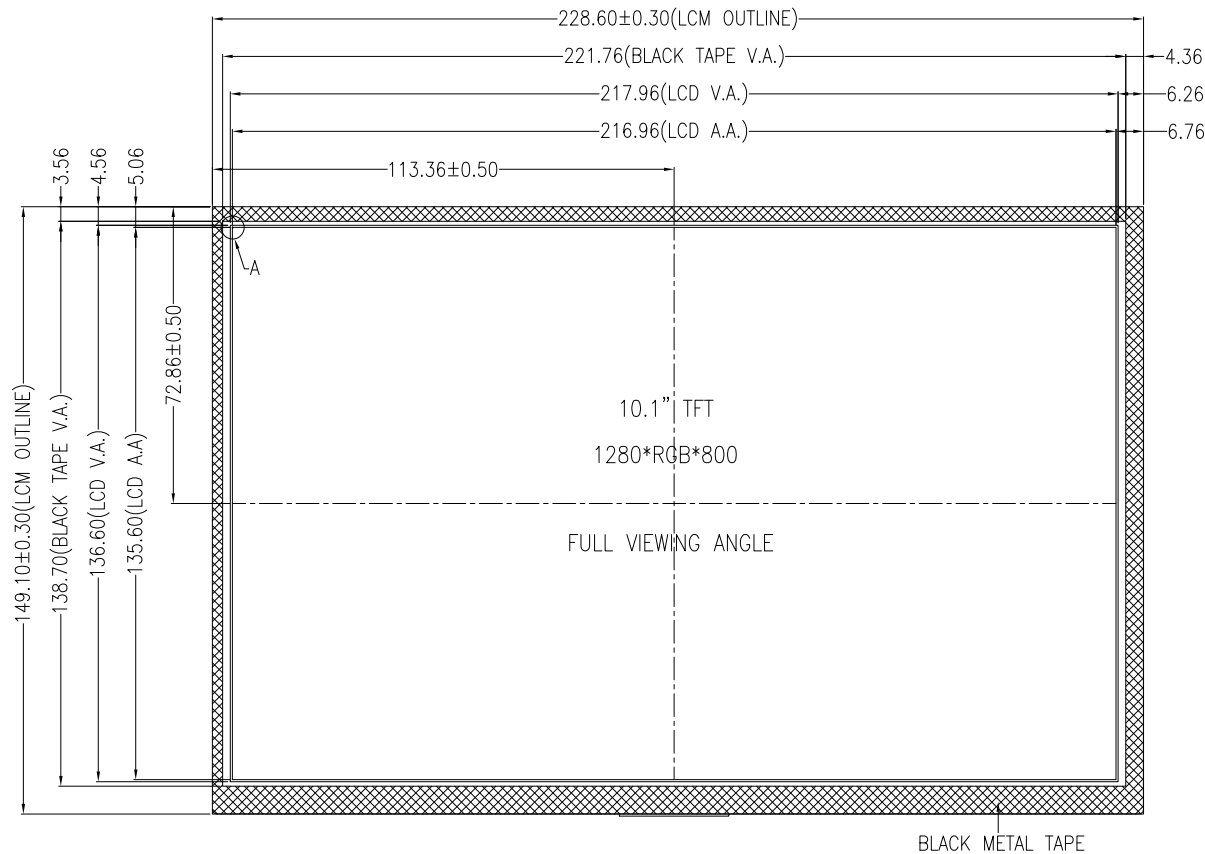


PIN ASSIGNMENT FOR CON1	
PIN	SYMBOL
1	VDD+5V
2	VDD+5V
3	VDD+5V
4	CTP_D+
5	CTP_D-
6	GND
7	NC
8	LED_EN
9	LED_PWM
10	GND
11	GND
12	NC
13	NC
14	GND
15	GND
16	RIN3+
17	RIN3-
18	GND
19	RCLK+
20	RCLK-
21	GND
22	RIN2+
23	RIN2-
24	GND
25	RIN1+
26	RIN1-
27	GND
28	RIN0+
29	RIN0-
30	GND

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=5.0V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: EK79202DB
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -40°C ~ 85°C
7. BACKLIGHT TYPE: WHITE LED
THE LED DRIVER IS BUILT-IN THE PCB
8. SURFACE LUMINANCE: 600CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. GENERAL TOLERANCE: ±0.3MM
12. ROHS COMPLIANT




DETAIL A
(SCALE 40:1)



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	JERRY	2025.03.02	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI1010AWT-3-B
APPROVED BY:			SHEET NO.: 1/2	DESCRIPTION:
VERSION NO:	01			TFT + PCBA MODULE

01	FIRST ISSUE	JERRY	2025.03.02
VER.	REVISED DESCRIPTION	REVISER	DATE

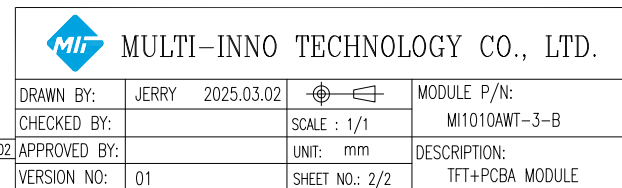

01	FIRST ISSUE	JERRY	2025.03.02
VER.	REVISED DESCRIPTION	REVISER	DATE