


PIXEL DETAIL
(SCALE 100:1)

NOTES:


1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: EK79202D
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: BUILT-IN BACKLIGHT DRIVER, VLED=12V
8. SURFACE LUMINANCE: 1100CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. UNMARKED TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

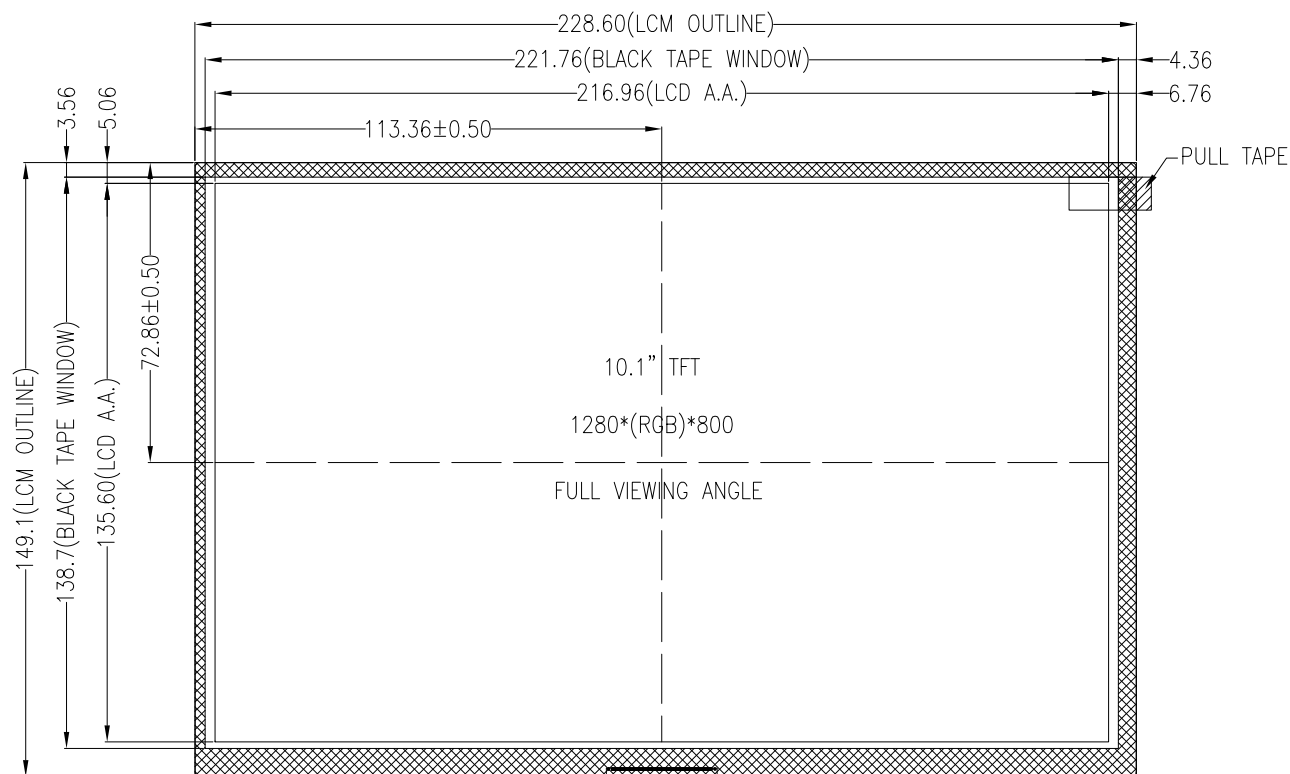

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2024.09.26		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1010AWT-4
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	CAROL	2024.09.26
VER.	REVISED DESCRIPTION	REVISOR	DATE

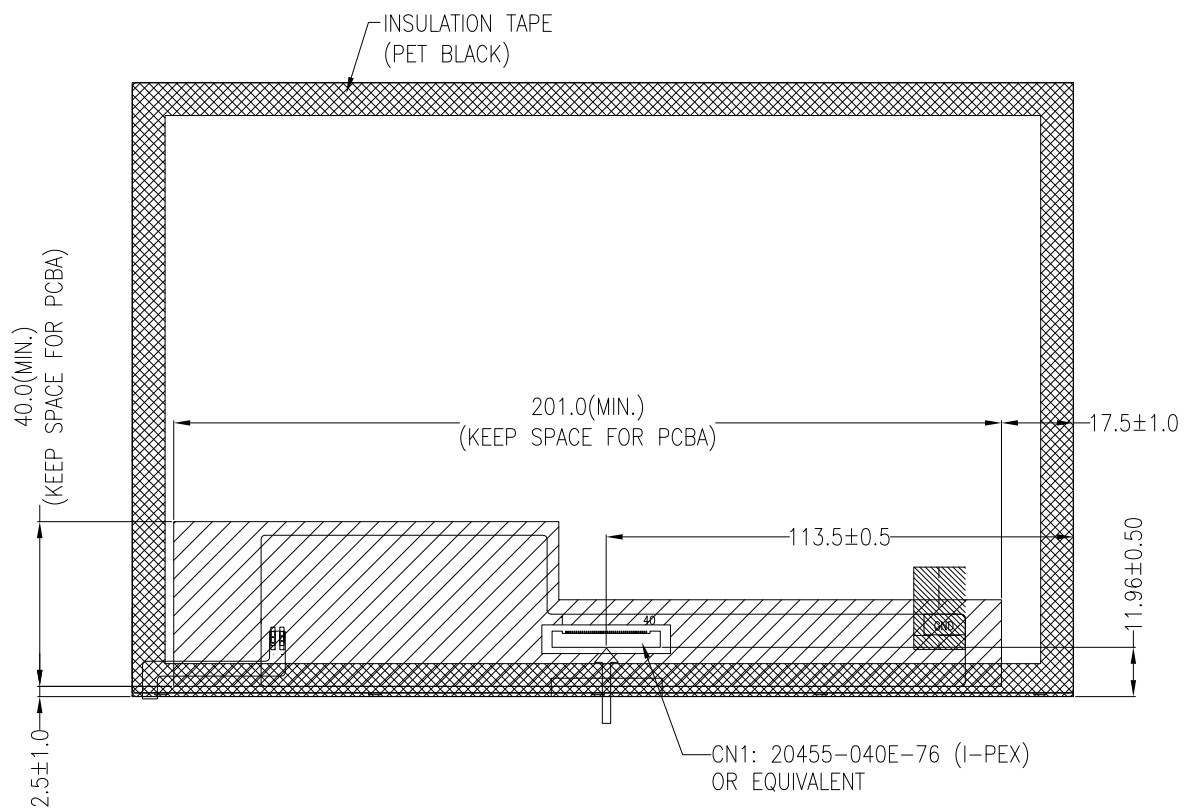

PIN DESCRIPTION			
PIN	SYMBOL	PIN	SYMBOL
1	VLED	21	MIPI_D3+
2	VLED	22	GND
3	GND	23	SPI_SDA
4	PWM	24	SPI_SCL
5	GND	25	GND
6	VDD	26	SPI_CSB
7	GND	27	NC
8	MIPI_D0-	28	NC
9	MIPI_D0+	29	NC
10	GND	30	GND
11	MIPI_D1-	31	NC(CTP_VDD)
12	MIPI_D1+	32	NC(CTP_SDA)
13	GND	33	NC(CTP_SCL)
14	MIPI_CLK-	34	NC(CTP_RST)
15	MIPI_CLK+	35	NC(CTP_INT)
16	GND	36	IIC_SDA
17	MIPI_D2-	37	IIC_SCL
18	MIPI_D2+	38	NC
19	GND	39	NC
20	MIPI_D3-	40	NC



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2024.09.26		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1010AWT-4
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2024.09.26
VER.	REVISED DESCRIPTION	REVISER	DATE