




NOTES:

1. DISPLAY TYPE: TFT, TRANSFLECTIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: -
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -30°C ~ 85°C
7. LED BACKLIGHT: WHITE LED, IF=161mA, VF=19.2V(TYP.)
8. SURFACE LUMINANCE: 500 CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: HARD-COATING(3H)
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. GENERAL TOLERANCE: ±0.5MM
12. ROHS COMPLIANT


PIN DESCRIPTION	
PIN	SYMBOL
1	GND
2	AVDD
3	VDD
4	GND
5	VCOM
6	VDD
7	GND
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	GND
16	VDD
17	GND
18	RXIN3+
19	RXIN3-
20	GND
21	RXCLKIN+
22	RXCLKIN-
23	GND
24	RXIN2+
25	RXIN2-
26	GND
27	RXIN1+
28	RXIN1-
29	GND
30	RXIN0+
31	RXIN0-
32	GND
33	GND
34	RESET
35	STBYB
36	SHLR
37	VDD
38	UPDN
39	GND
40	AVDD
41	VCOM
42	DITH
43	GND
44	VDD
45	GND
46	NC
47	NC
48	NC
49	NC
50	NC
51	NC
52	NC
53	GND
54	VDD
55	SELB
56	VGH
57	VDD
58	VGL
59	GND
60	BIST

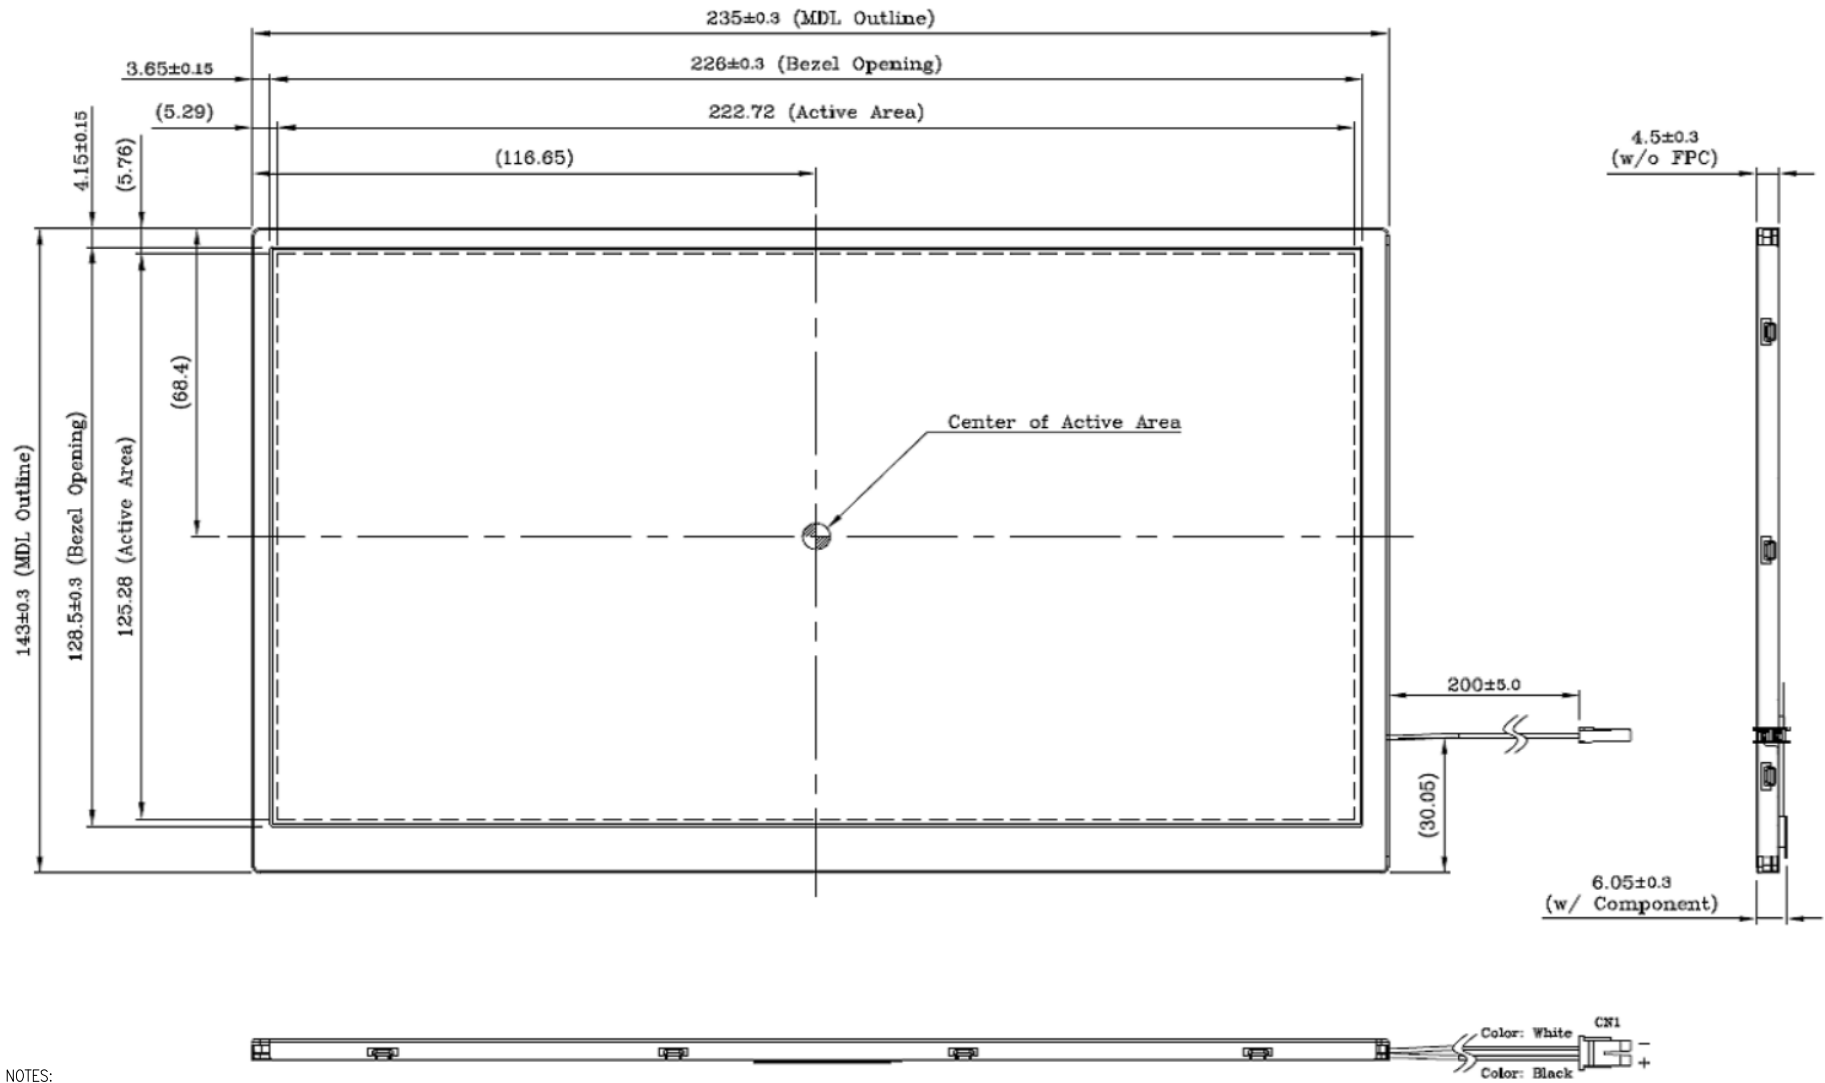

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2022.04.18		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1010AYT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	CAROL	2022.04.18
VER.	REVISED DESCRIPTION	REVISER	DATE

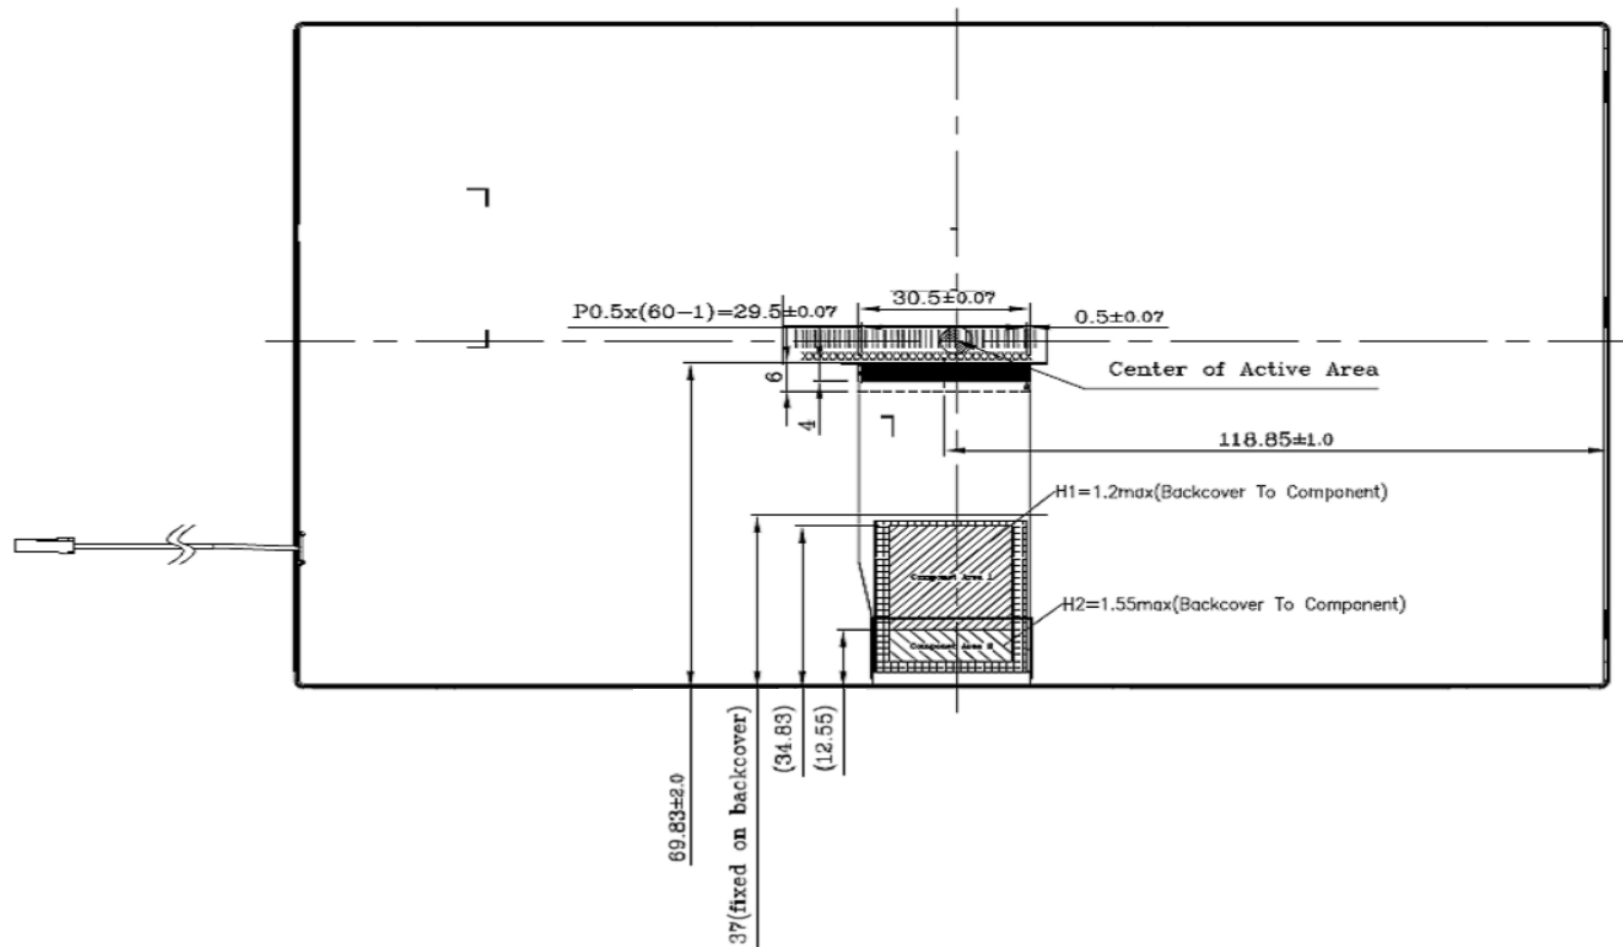

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2022.04.18		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1010AYT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2022.04.18
VER.	REVISED DESCRIPTION	REVISER	DATE