


DETAIL A
(SCALE 50:1)



BACKLIGHT CIRCUIT DIAGRAM


PIN ASSIGNMENT FOR LCM	
PIN NO.	SYMBOL
1	VCC
2	VCC
3	VSS
4	VSS
5	RIN0-
6	RIN0+
7	VSS
8	RIN1-
9	RIN1+
10	VSS
11	RIN2-
12	RIN2+
13	VSS
14	RCLK-
15	RCLK+
16	VSS
17	VDD_5V
18	VDD_5V
19	ADJ
20	VSS

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: 12 O'CLOCK
4. IC DRIVER: HX8282-A01+HX8696-A01
5. OPERATING TEMP: -20°C ~ 70°C
6. STORAGE TEMP: -30°C ~ 80°C
7. SURFACE LUMINANCE: 1000CD/M²(TYP.)
8. LED BACKLIGHT: 36-CHIP WHITE LED, If=240mA, Vf=16.8V~20.4V
9. SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.3MM
11. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	RITA	2019.08.01	MODULE P/N:
CHECKED BY:			MI101021T-5
APPROVED BY:			DESCRIPTION:
VER.	01	2019.08.01	TFT MODULE
REVISED DESCRIPTION	REVISER	DATE	VERSION NO:
			01
			SHEET NO.: 1/2
			UNIT: mm
			SCALE : 1/1

01	FIRST ISSUE	RITA	2019.08.01
VER.	REVISED DESCRIPTION	REVISER	DATE

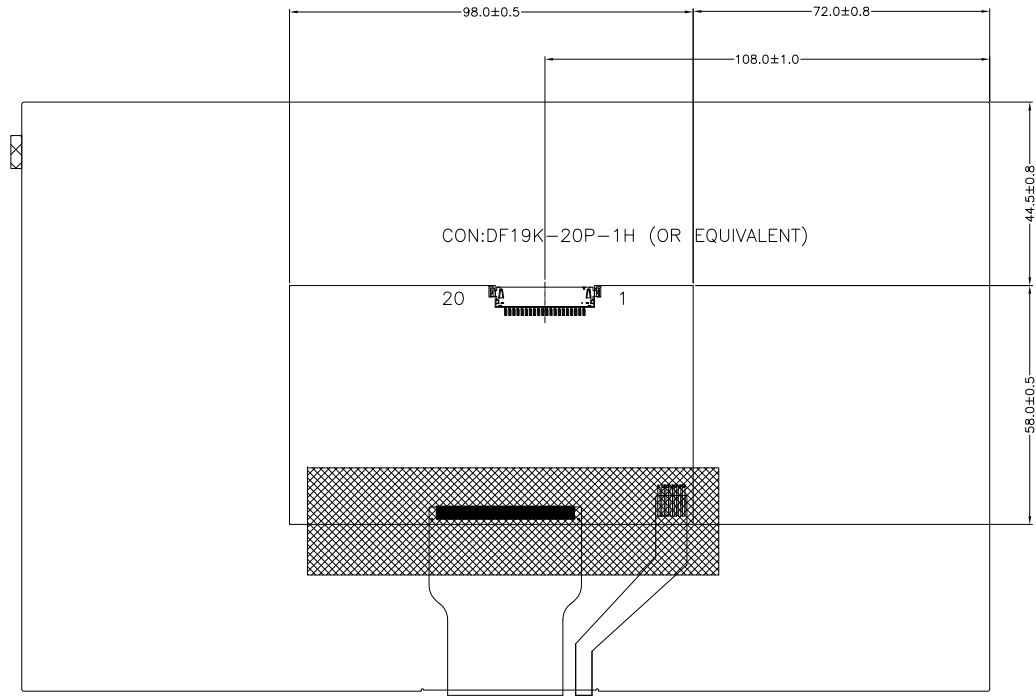

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2019.08.01		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1010Z1T-5
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	RITA	2019.08.01
VER.	REVISED DESCRIPTION	REVISER	DATE