


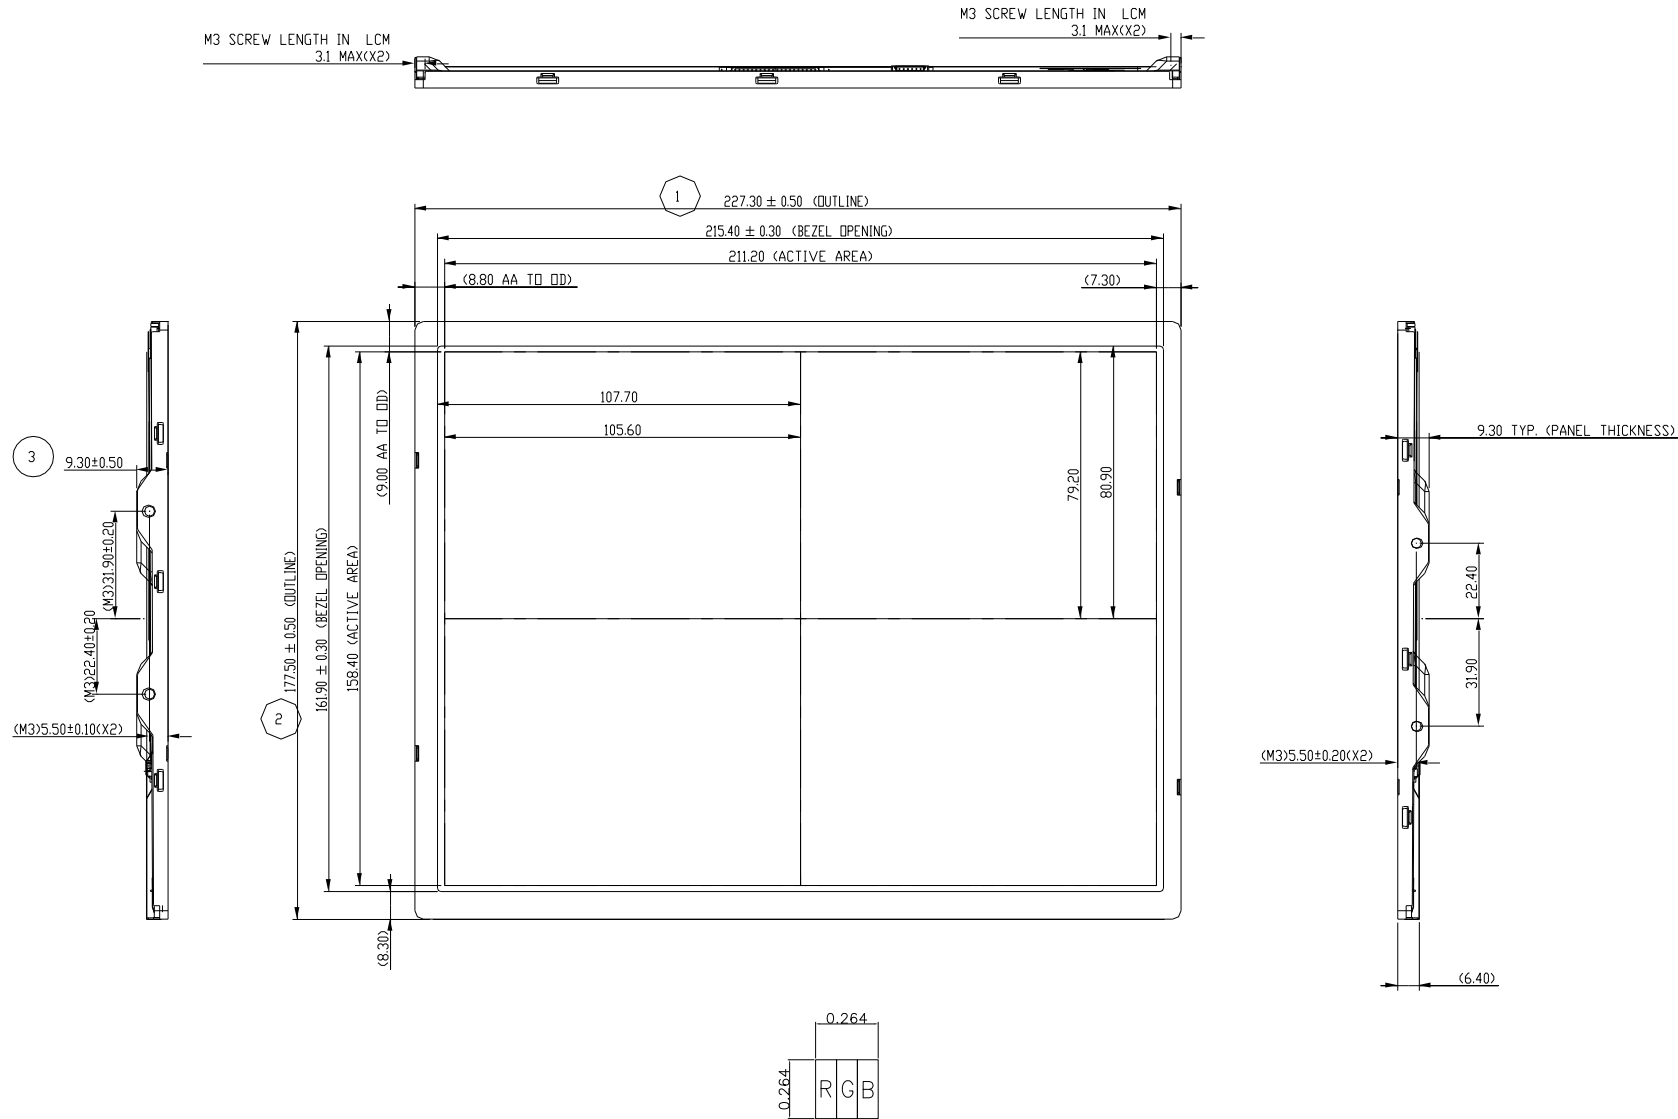

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: 6:00 O'CLOCK
4. DRIVER IC: -
5. OPERATING TEMP.: -30°C ~ 80°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, IF=180mA, VF=16.8V~20.4V
8. SURFACE LUMINANCE: 700CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

PIXEL DETAIL


PIN ASSIGNMENT FOR LCM	
PIN	SYMBOL
1	VDD
2	VDD
3	GND
4	RSV
5	RxIN0-
6	RxIN0+
7	GND
8	RxIN1-
9	RxIN1+
10	GND
11	RxIN2-
12	RxIN2+
13	GND
14	RxCLKIN-
15	RxCLKIN+
16	GND
17	RxIN3-
18	RxIN3+
19	SEL68
20	DPS
PIN ASSIGNMENT FOR B/L	
PIN	SYMBOL
1	VLED
2	VLED
3	GND
4	GND
5	VLED_EN
6	VPWM



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2023.06.12		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1040ACT-2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	RITA	2023.06.12
VER.	REVISED DESCRIPTION	REVISER	DATE

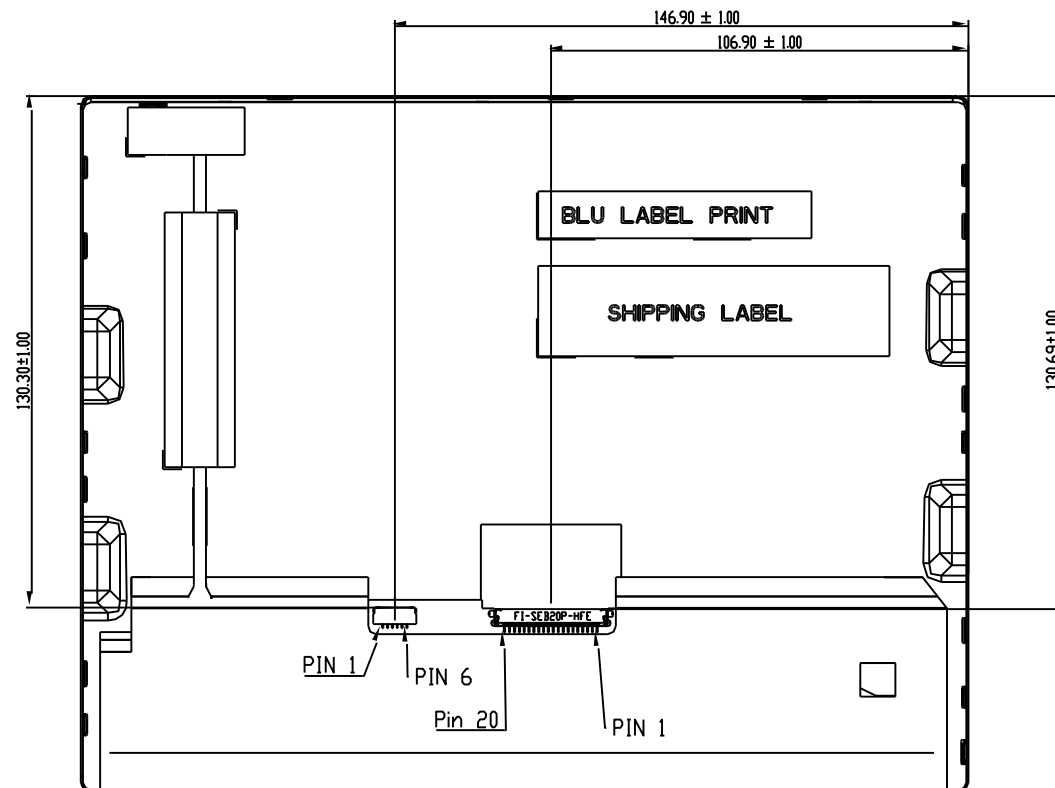

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2023.06.12		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1040ACT-2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	RITA	2023.06.12
VER.	REVISED DESCRIPTION	REVISER	DATE