



PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	VDD
2	VDD
3	GND
4	GND
5	IN0-
6	IN0+
7	GND
8	IN1-
9	IN1+
10	GND
11	IN2-
12	IN2+
13	GND
14	CLK-
15	CLK+
16	GND
17	NC
18	NC
19	GND
20	GND

PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	LEDA
2	LEDK

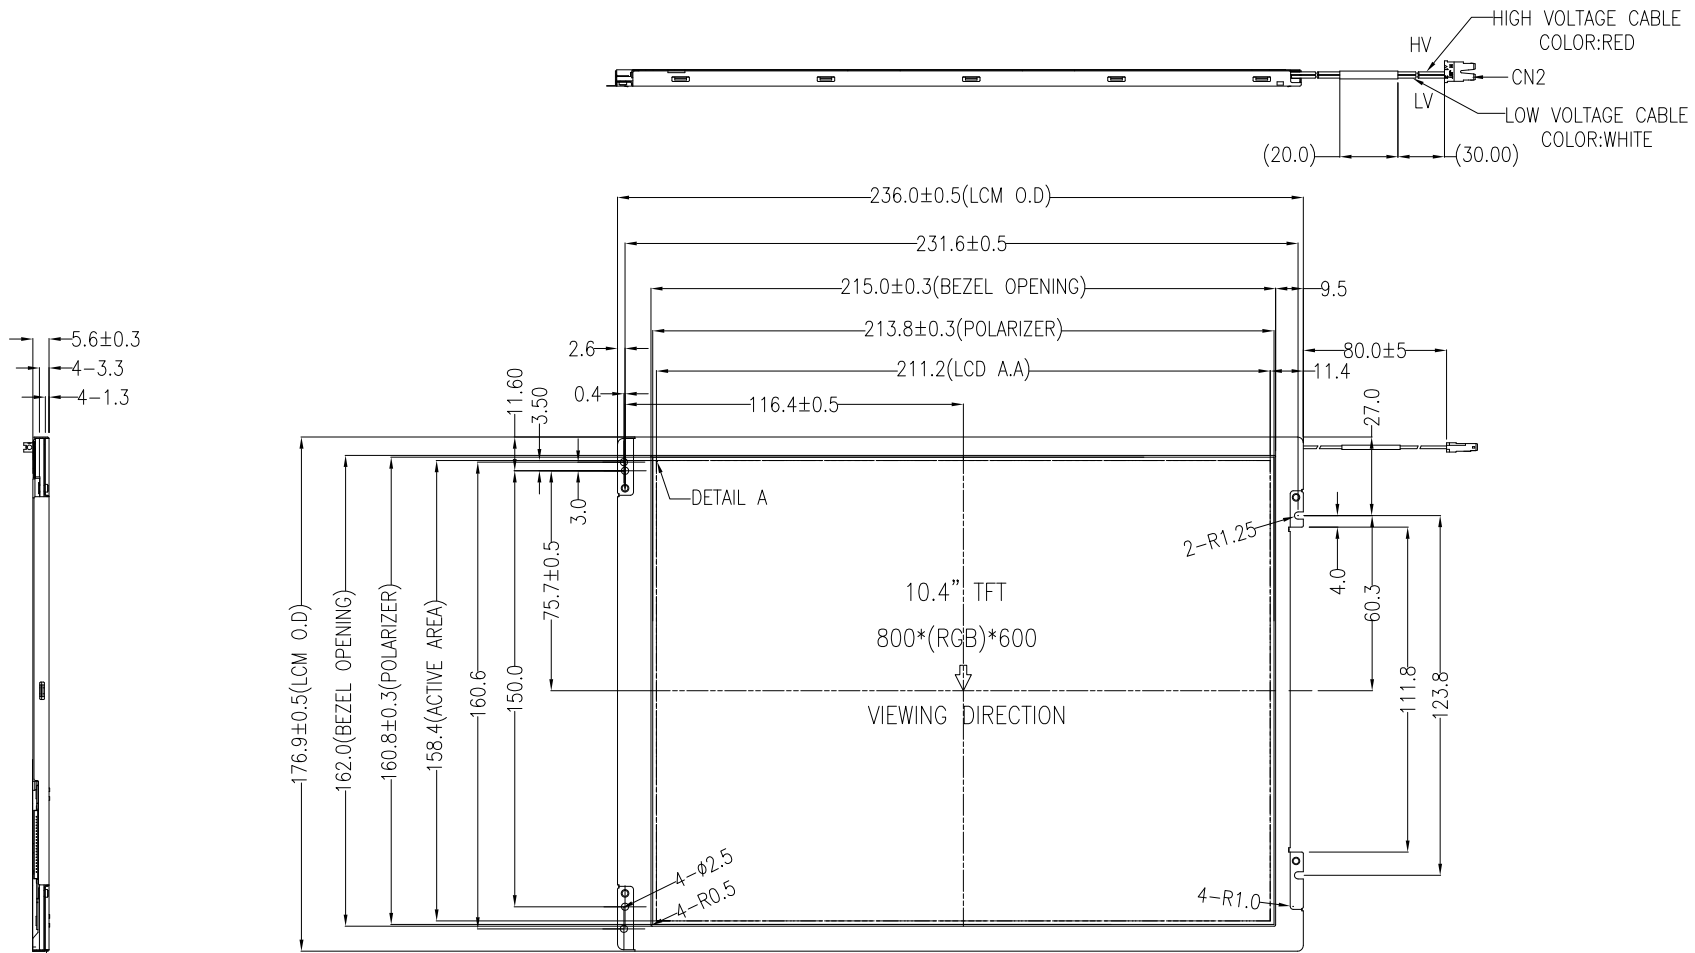

NOTES:


1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: 12 O'CLOCK
4. DRIVER IC: -
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: 36-CHIP WHITE LED, IF=120mA, VF=17.7V~20.7V
8. SURFACE LUMINANCE: 400CD/M<sup>2</sup> (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. CONNECTOR TYPE:  
 CN1(20P): HIROSE DF19K-20P-1H  
 CN2(BACKLIGHT): JST BHSR-02VS-1  
 MATING CONNECTOR JST SMO2B-HBSS-1-HB
11. GENERAL TOLERANCE: ±0.3MM
12. ROHS COMPLIANT



DETAIL A  
(SCALE 60:1)

<b>MULTI-INNO TECHNOLOGY CO., LTD.</b>			
DRAWN BY:	CAROL 2010.01.18		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI1040GT-1
APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	01	SHEET NO.: 1/1	TFT MODULE

01	FIRST ISSUE	CAROL	2010.01.18
VER.	REVISED DESCRIPTION	REVISER	DATE

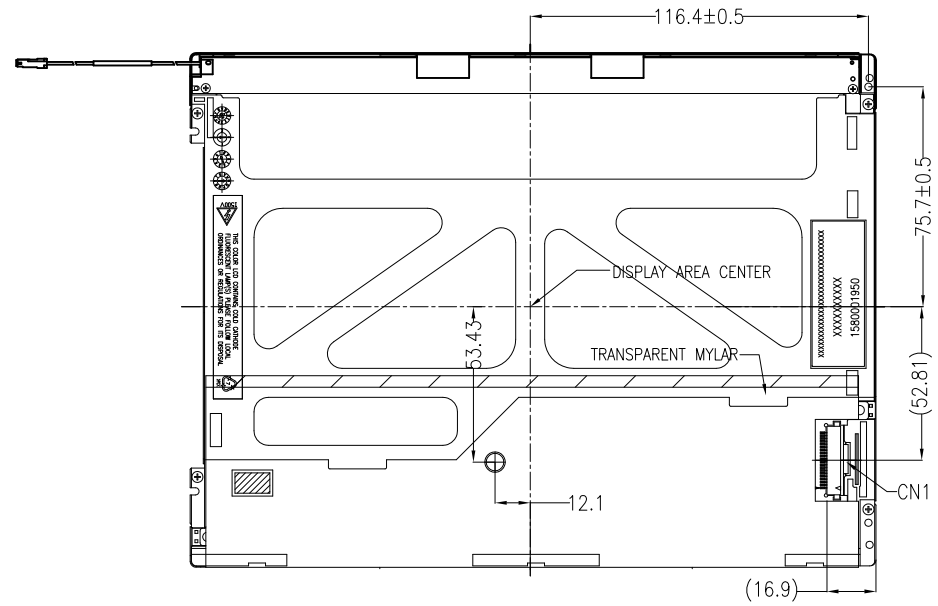

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2010.01.18		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1040GT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE

01	FIRST ISSUE	CAROL	2010.01.18
VER.	REVISED DESCRIPTION	REVISER	DATE