


PIN NO.	SYMBOL
1	VDD
2	VDD
3	GND
4	DPS
5	RxIN0-
6	RxIN0+
7	GND
8	RxIN1-
9	RxIN1+
10	GND
11	RxIN2-
12	RxIN2+
13	GND
14	RxCLKIN-
15	RxCLKIN+
16	GND
17	RxIN3-
18	RxIN3+
19	AG Mode
20	SEL68

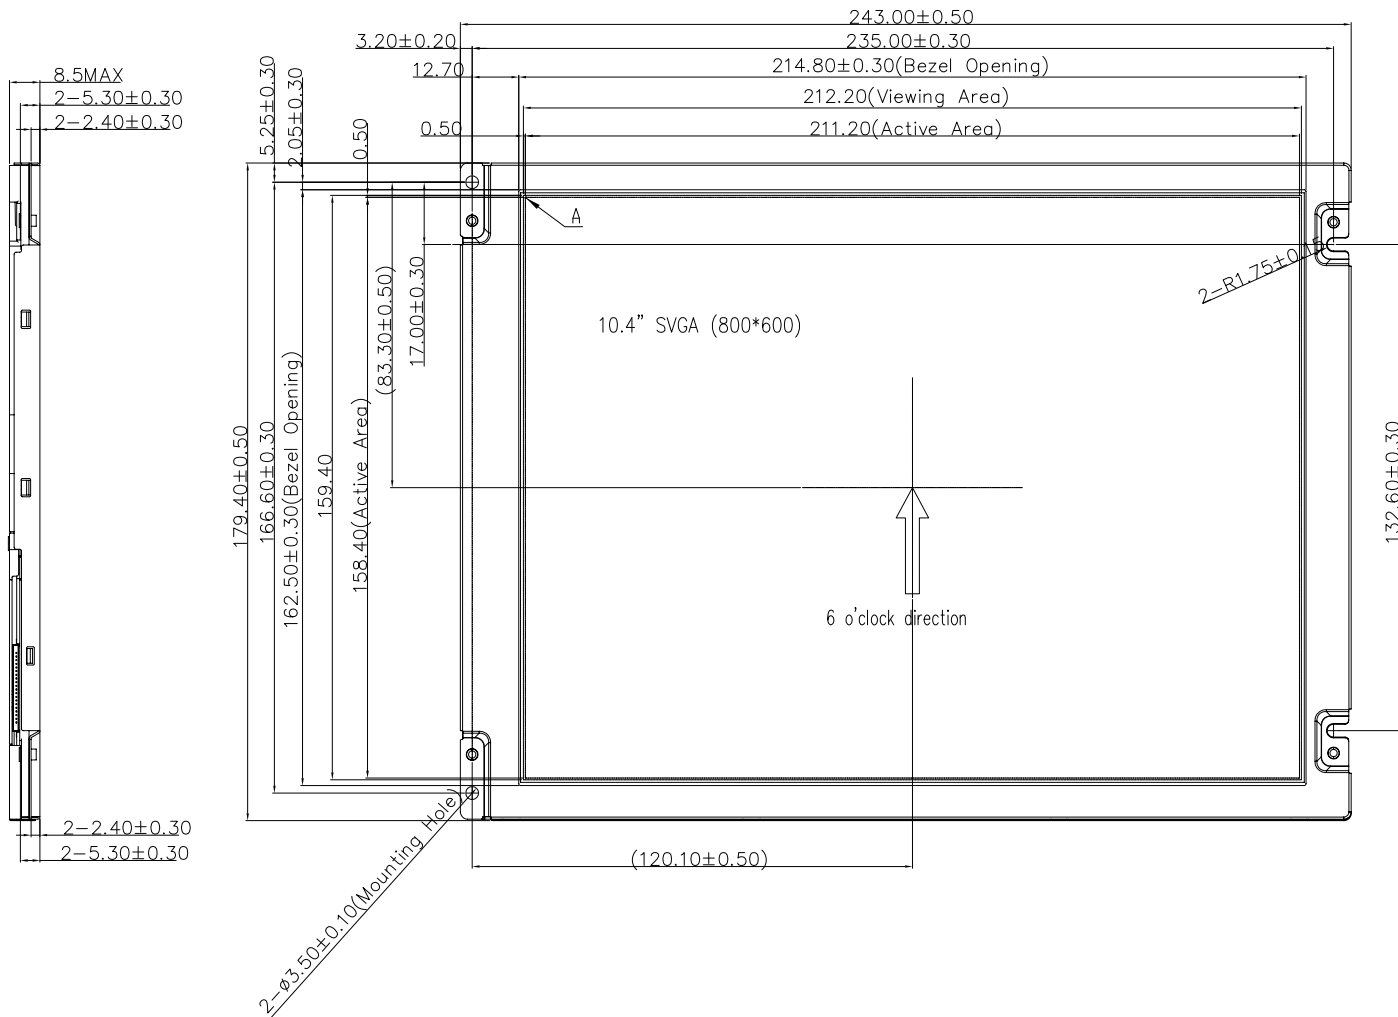


NOTE:

- GENERAL TOLERANCE TO BE  $\pm 0.3$ ;
- CONNECTOR TYPE:  
CN1: 107A20-0021RA-G3-R OR THE COMPATIBLE;
- CN2: ENTRY 3808K-F05N-03R, MATCH CONNECTOR: H208K-P05N-02B (FOR REFERENCE);
- GRAY SCALE INVERSION DIRECTION: 6 O'CLOCK;
- RECOMMENDED CASE OPEN AREA SHOULD BE LESS THAN MODULE V.A.
- REQUIREMENT ON ENVIRONMENT PROTECTION ROHS COMPLIANT.

DRAWN BY:		CHECKED BY:		APPROVED BY:		VERSION NO:		MODULE P/N:	
CAROL	2010.07.14					01		M1040GT-5	
SCALE: 1/1		UNIT: mm		SHEET NO.: 1/2		DESCRIPTION:		TFT MODULE	

01	FIRST ISSUE	CAROL	2010.07.14
VER.	REVISED DESCRIPTION	REVISER	DATE

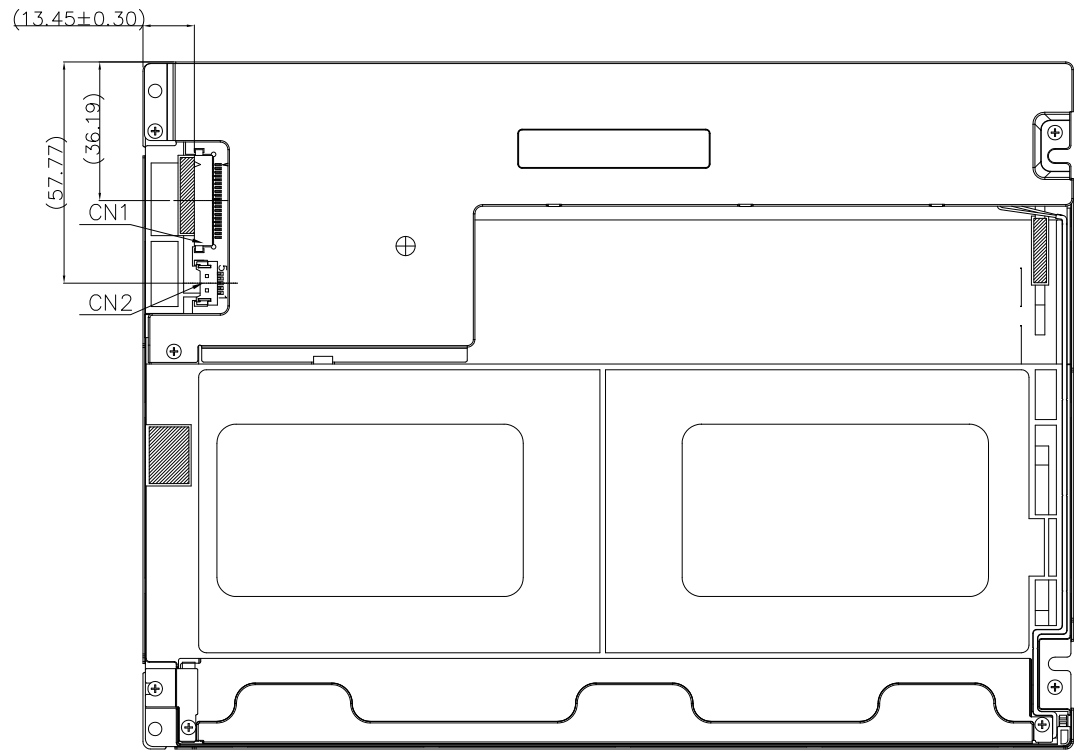

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2010.07.14		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1040GT-5
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2010.07.14
VER.	REVISED DESCRIPTION	REVISER	DATE