

DETAIL A
(SCALE 60:1)

PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	VDD
2	VDD
3	GND
4	DPS
5	RXIN0-
6	RXIN0+
7	GND
8	RXIN1-
9	RXIN1+
10	GND
11	RXIN2-
12	RXIN2+
13	GND
14	RXCLKIN-
15	RXCLKIN+
16	GND
17	RXIN3-
18	RXIN3+
19	AG MODE
20	SEL68


PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	VCC
2	GND
3	EN
4	DIMMING
5	NC

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: 12 O'CLOCK
4. DRIVER IC: NT39211 + NT39411
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: 40-CHIP WHITE LED,
BUILT-IN BACKLIGHT DRIVER: VCC=12.0V
8. SURFACE LUMINANCE: 550CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. MATCHED CONNECTOR:
CN1: DF19G-20S-1C OR COMPATIBLE
CN2: H208K-PO5N-02B OR COMPATIBLE
11. GENERAL TOLERANCE: ±0.3MM
12. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL	2013.11.25	MODULE P/N:
CHECKED BY:			MI1040GT-8A
APPROVED BY:			DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	CAROL	2013.11.25
			VERSION NO:
			01
			UNIT: mm
			SHEET NO.: 1/1
			SCALE : 1/1
			DESCRIPTION:
			TFT MODULE

01	FIRST ISSUE	CAROL	2013.11.25
VER.	REVISED DESCRIPTION	REVISER	DATE

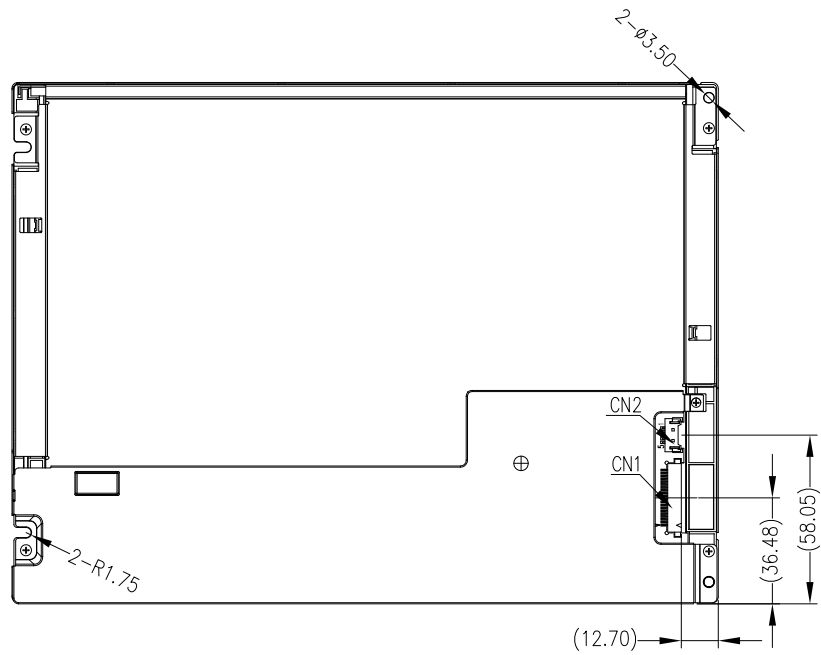

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2013.11.25		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1040GT-8A
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	CAROL	2013.11.25