

PIXEL DETAIL
(SCALE 50:1)


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. OPERATING TEMP: -20°C ~ 70°C
5. STORAGE TEMP: -30°C ~ 80°C
6. BACKLIGHT TYPE: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VLED=12.0V
7. SURFACE LUMINANCE: 400CD/M² (TYP.)
8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
9. UNMARKED TOLERANCE: ±0.5MM
10. ROHS COMPLIANT

		MULTI-INNO TECHNOLOGY CO., LTD.	
DRAWN BY:	CAROL		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI1040L2T-3
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO: 1/2	TFT MODULE

01	FIRST ISSUE	CAROL	2025.07.12
VER.	REVISED DESCRIPTION	REVISER	DATE

PIN DESCRIPTION FOR CN2		PIN DESCRIPTION FOR CN1	
PIN	SYMBOL	PIN	SYMBOL
1	VLED	1	VCC
2	VSS	2	VCC
3	EN	3	GND
4	ADJ	4	DPS
5	NC	5	RX0-
		6	RX0+
		7	GND
		8	RX1-
		9	RX1+
		10	GND
		11	RX2-
		12	RX2+
		13	GND
		14	RXC-
		15	RXC+
		16	GND
		17	RX3-
		18	RX3+
		19	RSV
		20	SEL68

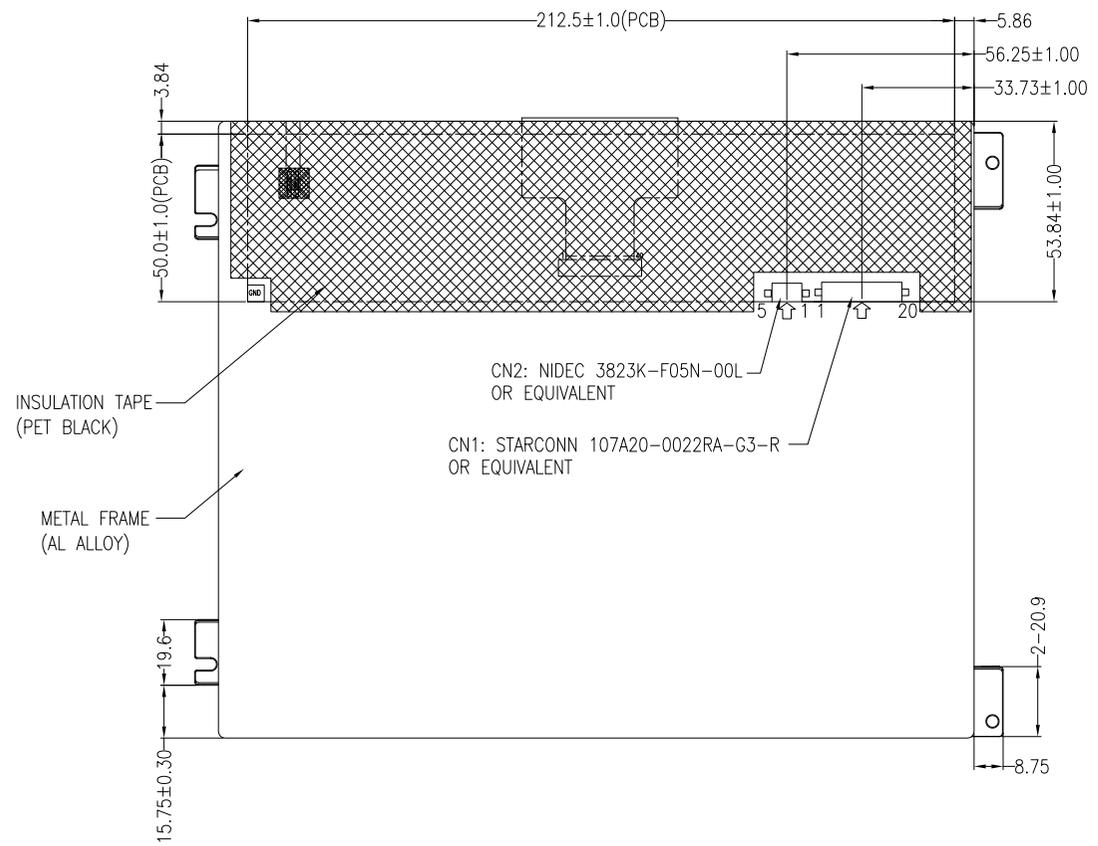

NOTES:

1. UNMARKED TOLERANCE: ± 0.5 MM



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI1040L2T-3
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2025.07.12
VER.	REVISED DESCRIPTION	REVISER	DATE