

PIN ASSIGNMENT	
1	VCC
2	VCC
3	GND
4	DPS
5	RX0-
6	RX0+
7	GND
8	RX1-
9	RX1+
10	GND
11	RX2-
12	RX2+
13	GND
14	RXC-
15	RXC+
16	GND
17	RX3-
18	RX3+
19	RSV
20	SEL68

NOTES:


1. DISPLAY TYPE: TFT/TRANSMISSIVE/NORMALLY WHITE.
2. OPERATING VOLTAGE: VCC=3.3V.
3. VIEWING DIRECTION: 12:00 O'CLOCK.
4. DRIVER IC: TBD.
5. OPERATING TEMP.: -30°~85°.
6. STORAGE TEMP.: -30°~85°.
7. LED BACKLIGHT: LED, IF=250mA, VF=12V.
8. SURFACE LUMINANCE: 400cd/m<sup>2</sup>(TYP.).
9. TREATMENT OF TOP SURFACE: ANTI-GLARE.
10. GENERAL TOLERANCE: ±0.2.
11. RoHS COMPLIANT.



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2016.05.25	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	M11040VT-1
APPROVED BY:			mm	DESCRIPTION:
VERSION NO:	01			TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	RITA	2016.05.25

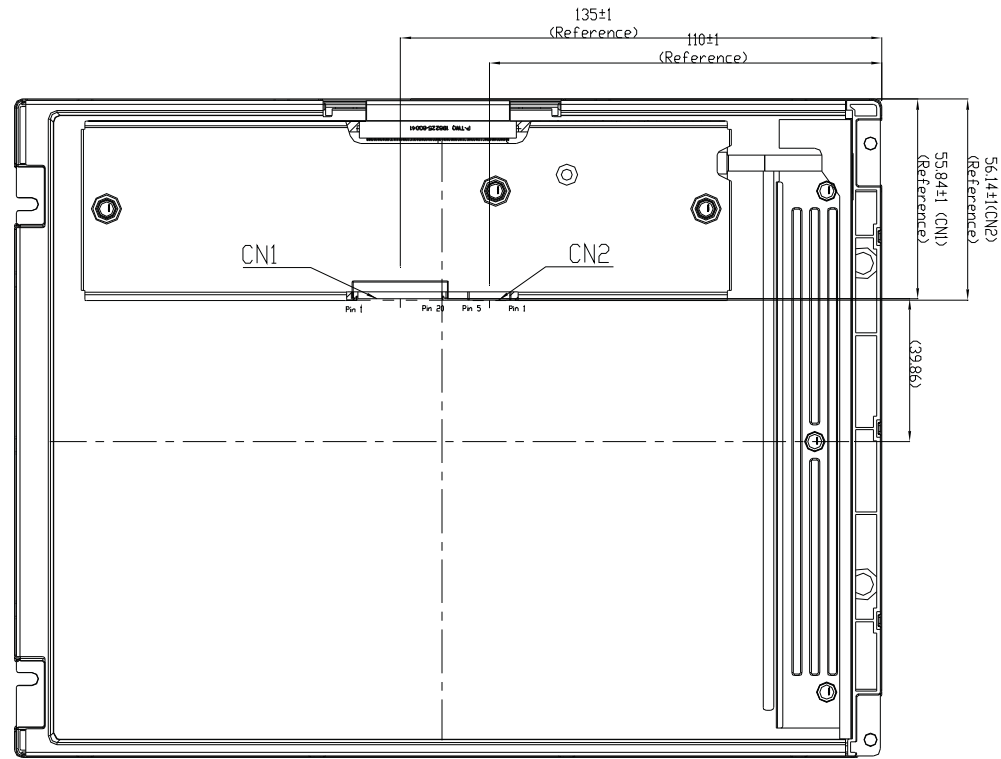

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2016.05.25	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	MI1040VT-1
APPROVED BY:			mm	DESCRIPTION:
VERSION NO:	01			TFT MODULE

01	FIRST ISSUE	RITA	2016.05.25
VER.	REVISED DESCRIPTION	REVISER	DATE