

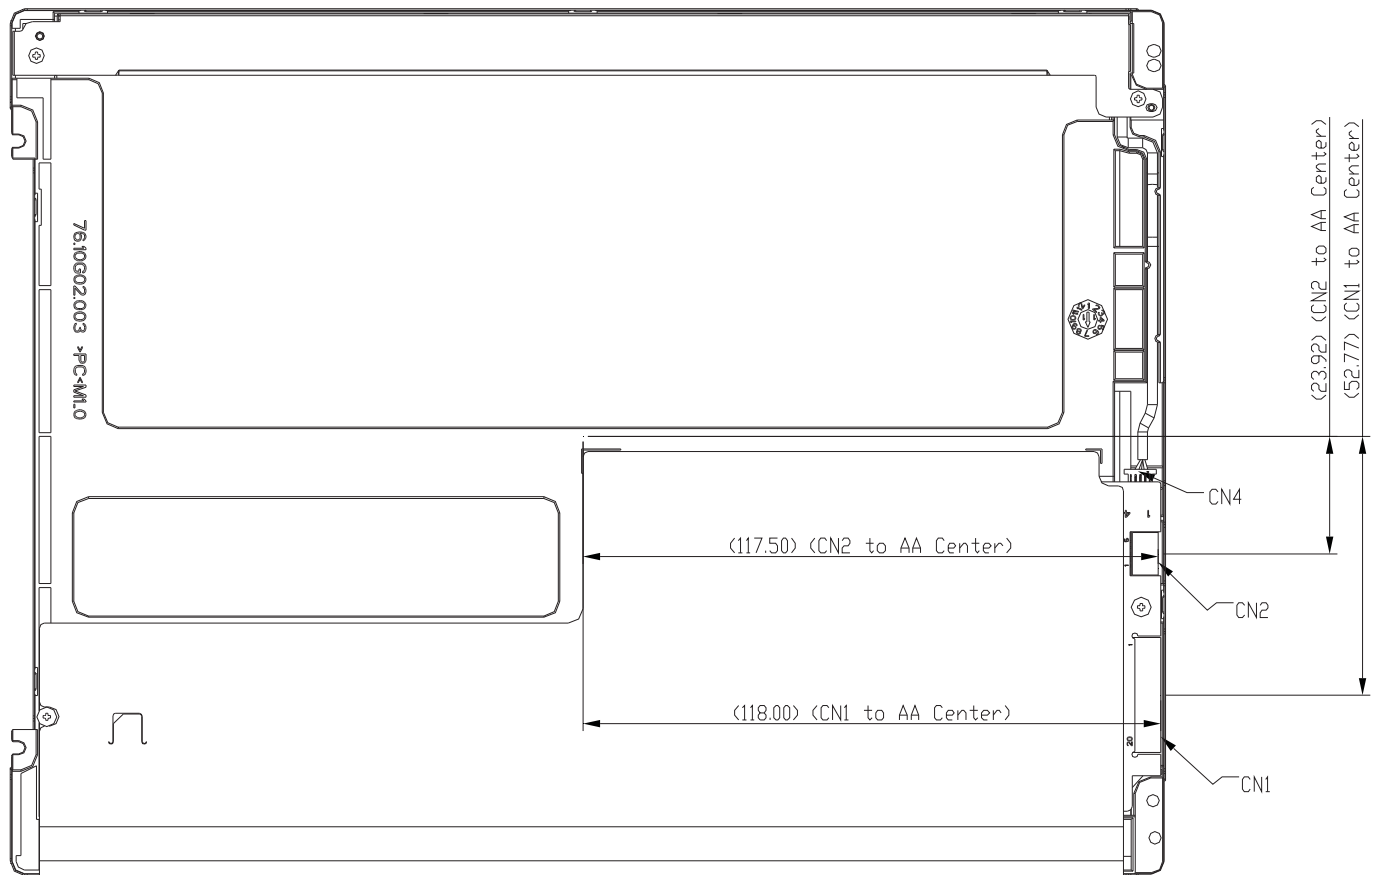


NOTES:

1. DISPLAY TYPE: TN, NORMALLY WHITE.
2. OPERATING VOLTAGE: VDD=3.3V.
3. VIEWING DIRECTION: 12 O'CLOCK.
4. DRIVER IC: -
5. OPERATING TEMP.: -20~70°.
6. STORAGE TEMP.: -20~70°.
7. BACKLIGHT: LED.
8. CN1 TO BE: HIROSE DF 19K-20P-1H. MATING TYPE: HIROSE DF19-20S-1C.
CN2 TO BE: ENTERY 3808K-F05N-02B. MATING TYPE: ENTERY H208K-P05N-02B.
CN4 TO BE: ENTERY H113K-D04N-01B. MATING TYPE: ENTERY 3710K-004N-01R.
9. SURFACE LUMINANCE: 230CD/M²(TYP.).
10. TREATMENT OF TOP SURFACE: TBD.
11. GENERAL TOLERANCE: ±0.3mm.
12. ROHS COMPLIANT.

01	FIRST ISSUE	RITA	2016.11.15
VER.	REVISED DESCRIPTION	REVISER	DATE

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	RITA	2016.11.15	SCALE : 1/1
CHECKED BY:			UNIT: mm
APPROVED BY:			 DESCRIPTION: TFT MODULE
VERSION NO:	01		



PIN ASSIGNMENT	
NO.	SYMBOL
1	VDD
2	VDD
3	GND
4	DPS
5	RxIN0-
6	RxIN0+
7	GND
8	RxIN1-
9	RxIN1+
10	GND
11	RxIN2-
12	RxIN2+
13	GND
14	CKIN-
15	CKIN+
16	GND
17	RxIN3-
18	RxIN3+
19	Reserved
20	SEL68



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2016.11.15	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI1040XT-1
APPROVED BY:				DESCRIPTION:
VERSION NO:	01			TFT MODULE

01	FIRST ISSUE	RITA	2016.11.15
VER.	REVISED DESCRIPTION	REVISER	DATE