



PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	VDD
2	VDD
3	GND
4	GND
5	RIN0-
6	RIN0+
7	GND
8	RIN1-
9	RIN1+
10	GND
11	RIN2-
12	RIN2+
13	GND
14	CLKIN-
15	CLKIN+
16	GND
17	RIN3-
18	RIN3+
19	SEL68
20	REVERSE

PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	VCC
2	VCC
3	VCC
4	GND
5	GND
6	GND
7	EN
8	PWM


PIN DESCRIPTION FOR CN3&CN4	
PIN	SYMBOL
1	NC
2	NC
3	LED C1
4	LED A1
5	LED A2
6	LED C2
7	LED C3
8	LED A3
9	LED A4
10	LED C4

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: -
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -30°C ~ 85°C
7. LED BACKLIGHT: 36-CHIP WHITE LED
BUILT-IN BACKLIGHT DRIVER: VCC=12V
8. SURFACE LUMINANCE: 1500CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL 2022.05.17		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI1210ABT-1
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO.: 2/2	TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	CAROL	2022.05.17

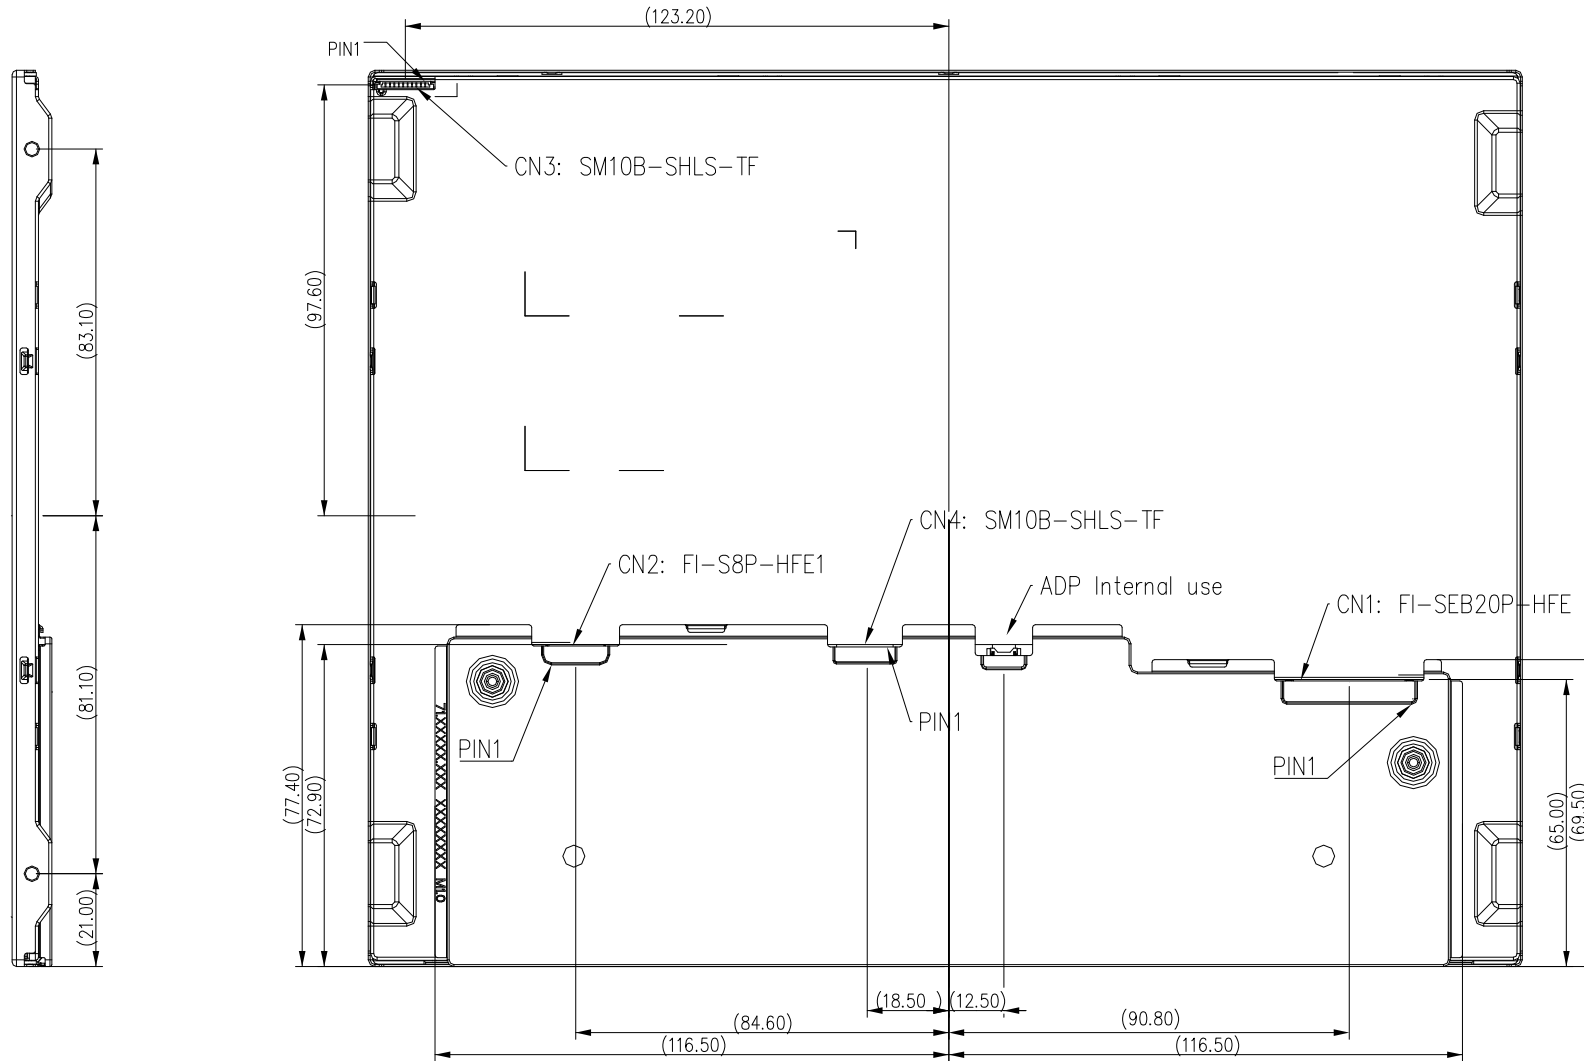

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2022.05.17		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1210ABT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO.:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	CAROL	2022.05.17
VER.	REVISED DESCRIPTION	REVISER	DATE