



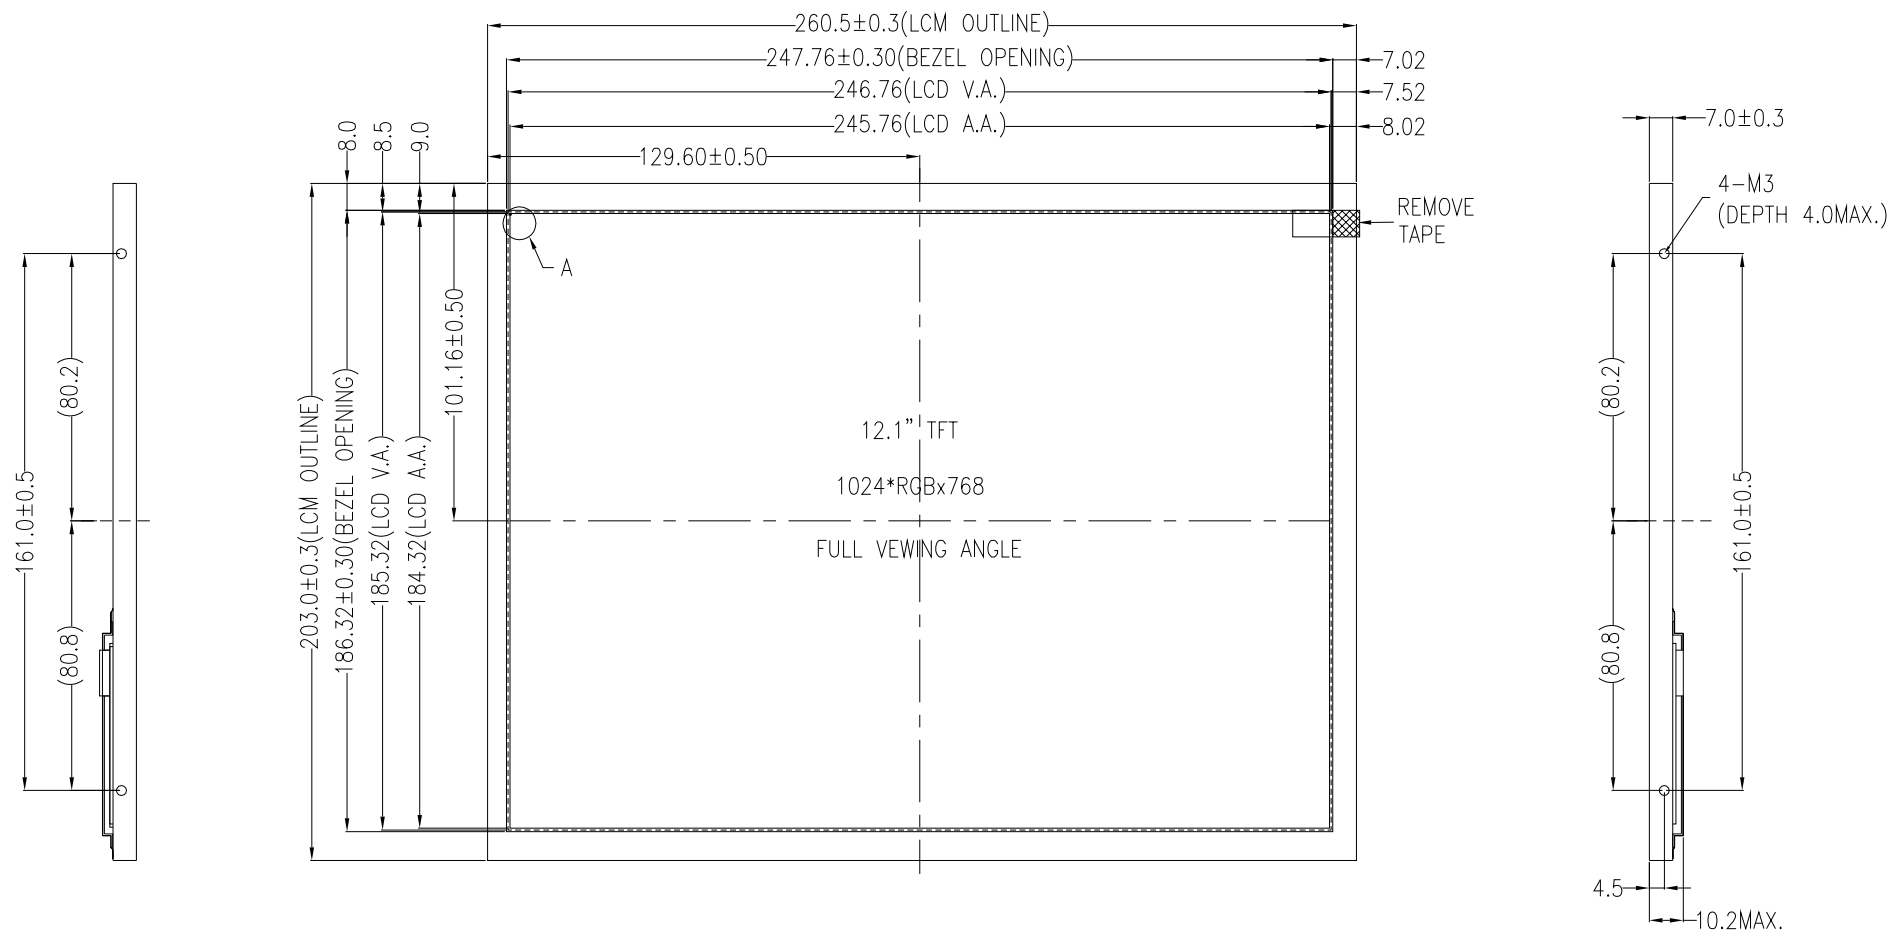

NOTES:


1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: JD9168S
5. OPERATING TEMP.: $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$
6. STORAGE TEMP.: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$
7. LED BACKLIGHT: WHITE LED, BUILT-IN BACKLIGHT DRIVER: VLED=12V
8. SURFACE LUMINANCE: $500\text{CD}/\text{M}^2$ (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. CN1: STARTONN 076B20-0048RA-G4 OR JAE FI-SEB20P-HFE OR EQUIVALENT
CN2: JAE FI-S8P-HFE OR EQUIVALENT
11. GENERAL TOLERANCE: $\pm 0.5\text{MM}$
12. ROHS COMPLIANT



DETAIL A
(SCALE 40:1)

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	RITA	2024.07.15	MODULE P/N:
CHECKED BY:			MI1210ADT-1
APPROVED BY:			DESCRIPTION:
VERSION NO:	01		TFT MODULE
		UNIT: mm	
		SHEET NO.: 1/2	

01	FIRST ISSUE	RITA	2024.07.15
VER.	REVISED DESCRIPTION	REVISER	DATE

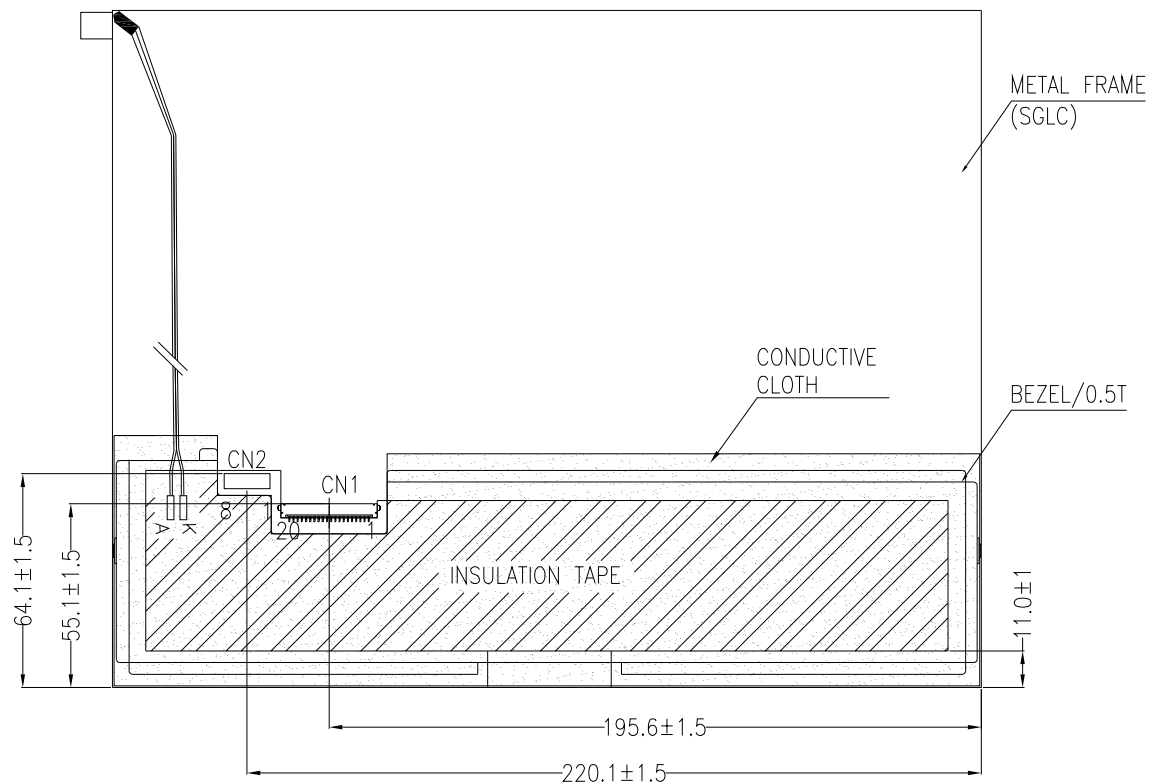

PIN ASSIGNMENT FOR CN1	
PIN	SYMBOL
1	RX3+
2	RX3-
3	NC
4	SEL68
5	GND
6	RXC+
7	RXC-
8	GND
9	RX2+
10	RX2-
11	GND
12	RX1+
13	RX1-
14	GND
15	RX0+
16	RX0-
17	L/R
18	U/D
19	VDD
20	VDD

PIN ASSIGNMENT FOR CN2	
PIN	SYMBOL
1	12V
2	12V
3	12V
4	GND
5	GND
6	GND
7	BL_EN
8	BL_DIMMING



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2024.07.15		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1210ADT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	RITA	2024.07.15
VER.	REVISED DESCRIPTION	REVISER	DATE