



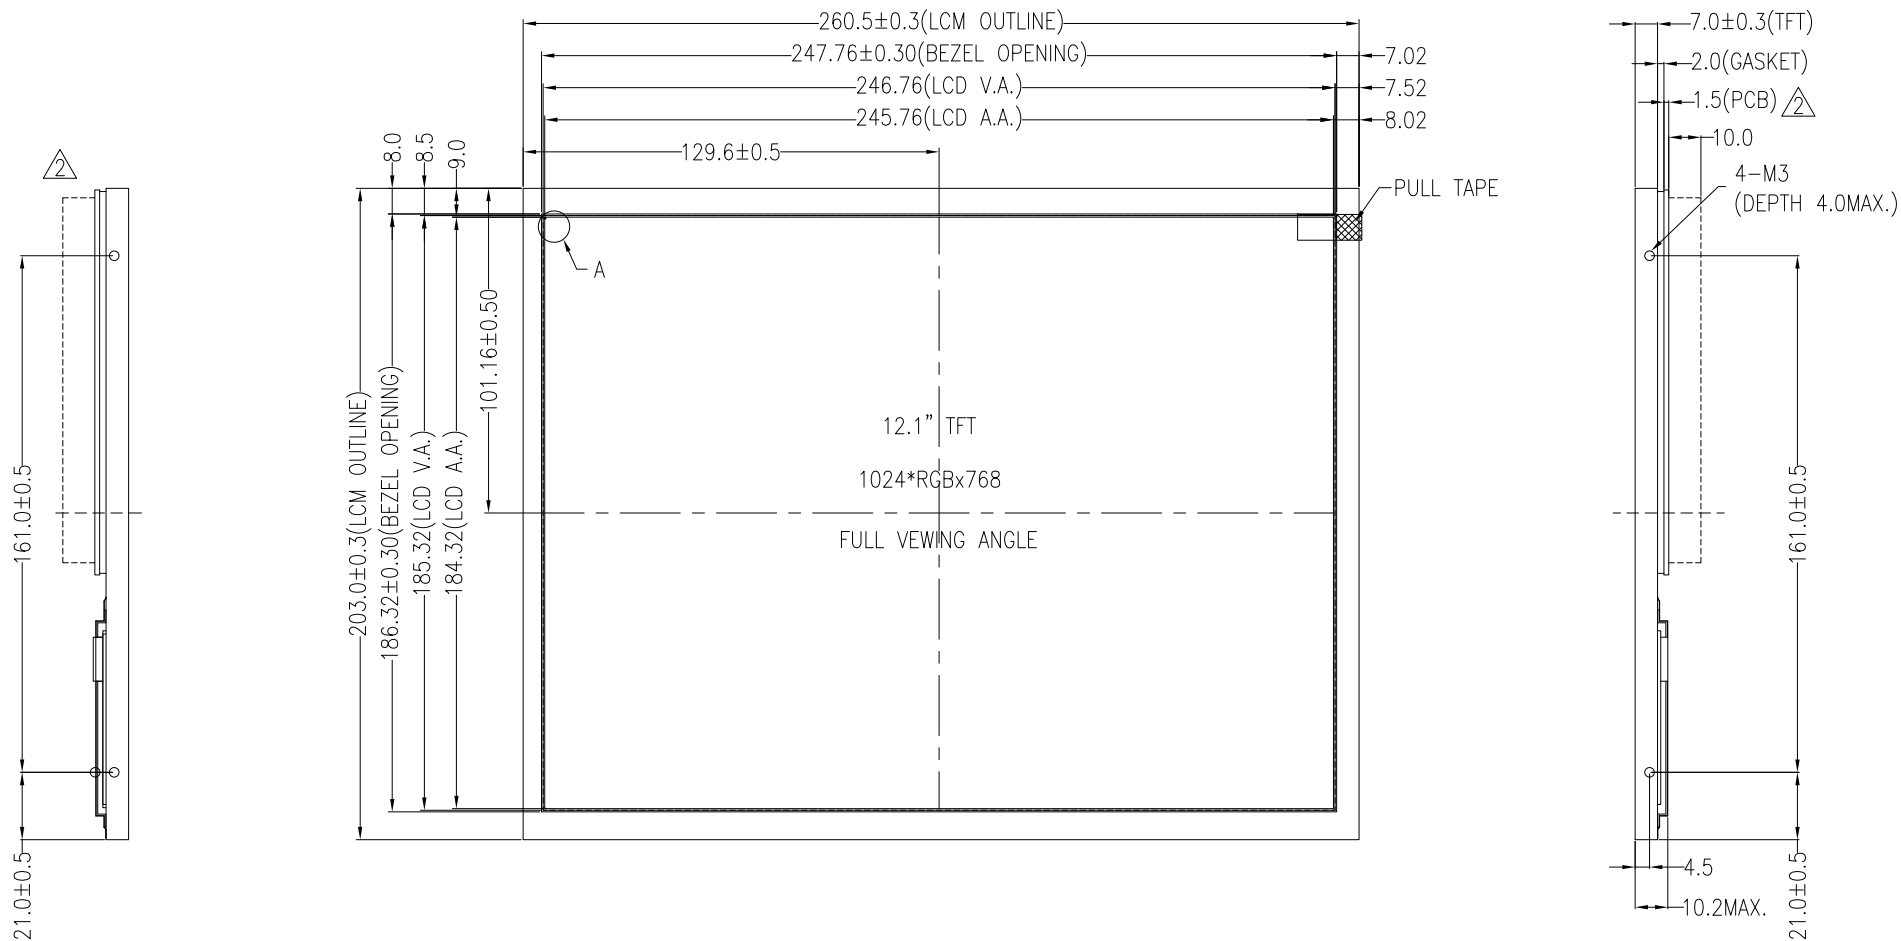

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: JD9168S
5. OPERATING TEMP.: -30°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: BUILT-IN BACKLIGHT DRIVER, VLED=12V
8. SURFACE LUMINANCE: 1000CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. UNMARKED TOLERANCE: ±0.5MM
11. ROHS COMPLIANT




DETAIL A
(SCALE 60:1)



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:		CAROL	MODULE P/N:	
CHECKED BY:			M1210ADT-2	
APPROVED BY:			DESCRIPTION:	
VERSION NO:		02	TFT MODULE	

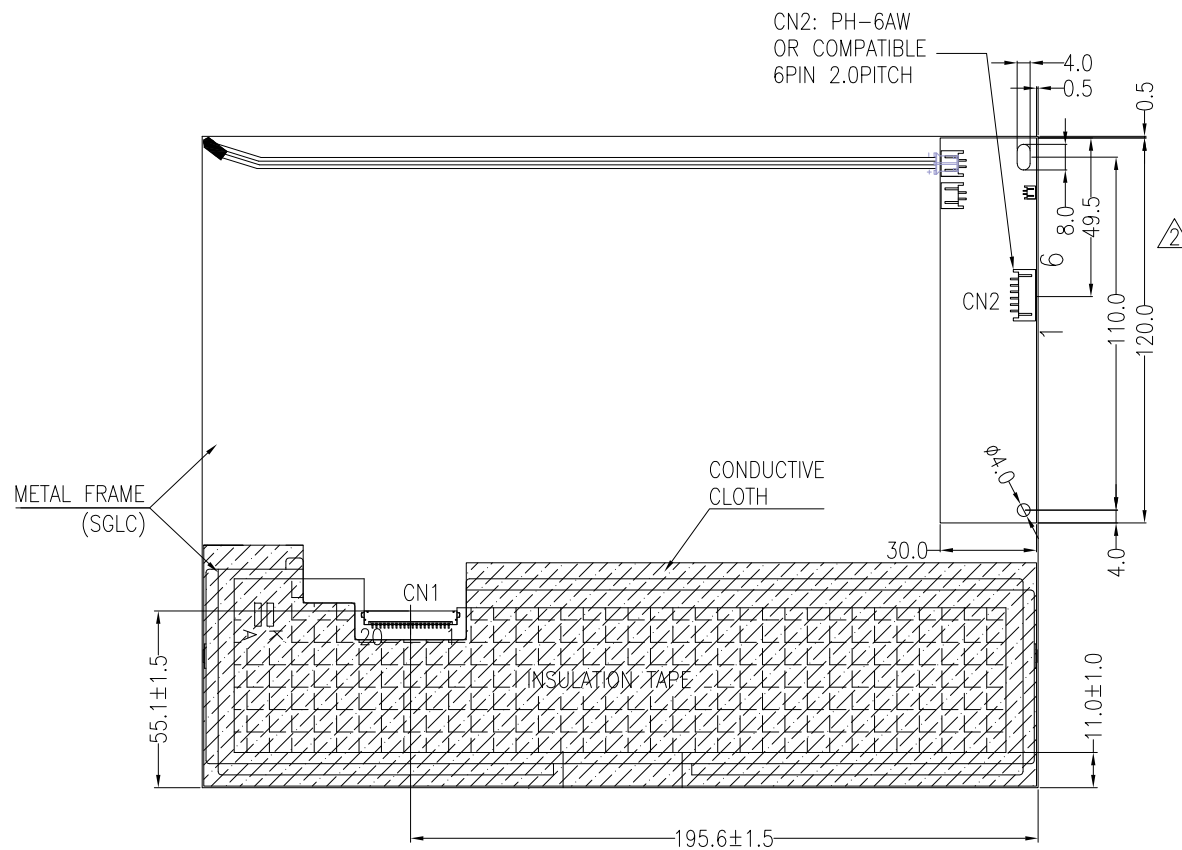

CN2 (BACKLIGHT CONTROL)	
PIN	SYMBOL
1	12V
2	12V
3	ON/OFF
4	ADJ
5	GND
6	GND

CN1 (TFT)	
PIN	SYMBOL
1	RX3+
2	RX3-
3	NC
4	SEL68
5	GND
6	RXC+
7	RXC-
8	GND
9	RX2+
10	RX2-
11	GND
12	RX1+
13	RX1-
14	GND
15	RX0+
16	RX0-
17	L/R
18	U/D
19	VDD
20	VDD

NOTES:

1. CN1: STARTONN 076B20-0048RA-G4 OR JAE FI-SEB20P-HFE OR EQUIVALENT
2. CN2: HC PH-6Y OR EQUIVALENT



MULTI-INNO TECHNOLOGY CO., LTD.

02	ADD LED DRIVER BOARD	RITA	2025.04.11	DRAWN BY:	CAROL		MODULE P/N:
01	FIRST ISSUE	CAROL	2024.08.16	CHECKED BY:		SCALE : 1/1	MI1210ADT-2
VER.	REVISED DESCRIPTION	REVISER	DATE	APPROVED BY:		UNIT: mm	DESCRIPTION:
				VERSION NO:	02	SHEET NO.: 1/2	TFT MODULE