

| PIN ASSIGNMENT | |
|----------------|-----------|
| 1 | VLED |
| 2 | VLED |
| 3 | VLED |
| 4 | VLED |
| 5 | EN |
| 6 | PWM |
| 7 | GND |
| 8 | GND |
| 9 | VDD |
| 10 | VDD |
| 11 | GND |
| 12 | GND |
| 13 | RXin0N |
| 14 | RXin0P |
| 15 | GND |
| 16 | RXin1N |
| 17 | RXin1P |
| 18 | GND |
| 19 | RXin2N |
| 20 | RXin2P |
| 21 | GND |
| 22 | LVDS_RX_N |
| 23 | LVDS_RX_P |
| 24 | GND |
| 25 | RXin3N |
| 26 | RXin3P |
| 27 | GND |
| 28 | SEL6/8 |
| 29 | GND |
| 30 | GND |

NOTES:


1. DISPLAY TYPE: TFT/TRANSMISSIVE/NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: TBD
5. OPERATING TEMP.: -30°C~85°C
6. STORAGE TEMP.: -30°C~85°C
7. LED BACKLIGHT: LED
8. SURFACE LUMINANCE: 400cd/m²(TYP.)
9. TREATMENT OF TOP SURFACE: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.2
11. RoHS COMPLIANT




MULTI-INNO TECHNOLOGY CO., LTD.


| | | | | |
|--------------|------|------------|-------------|--------------|
| DRAWN BY: | RITA | 2017.05.17 | SCALE : 1/1 | MODULE P/N: |
| CHECKED BY: | | | UNIT: | MI1210RT-1 |
| APPROVED BY: | | | mm | DESCRIPTION: |
| VERSION NO: | 01 | | | TFT MODULE |

| 01 | FIRST ISSUE | RITA | 2017.05.17 |
|------|---------------------|---------|------------|
| VER. | REVISED DESCRIPTION | REVISER | DATE |
| | | | |

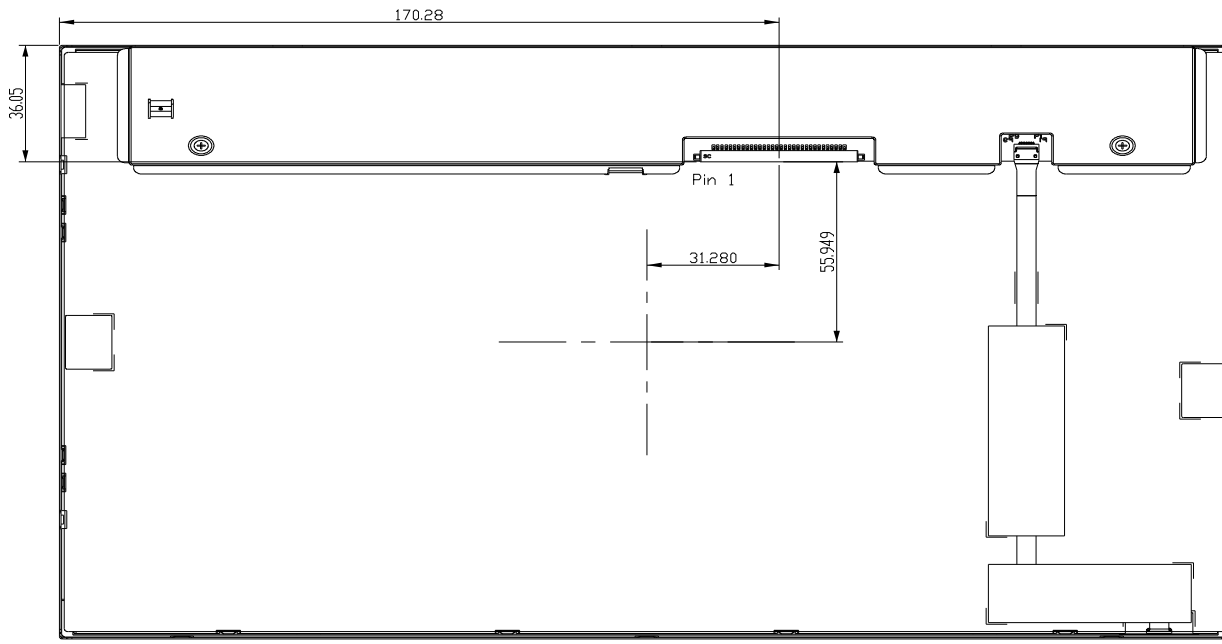

userhole_T
(LB FPC)

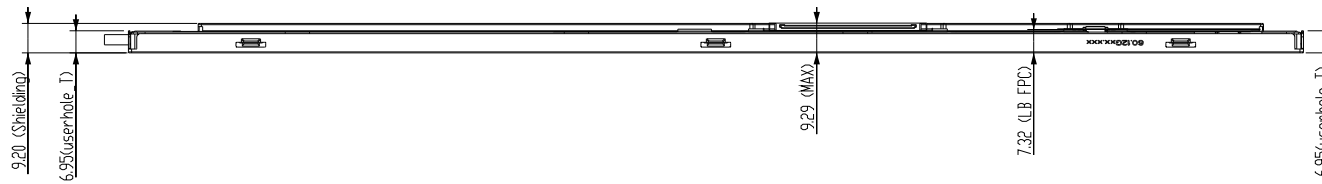

| | | | | |
|--|---------------------|---------------------------|--------------|----------------------------|
|  MULTI-INNO TECHNOLOGY CO., LTD. | | DRAWN BY: RITA 2017.05.17 | SCALE : 1/1 | MODULE P/N: MI1210RT-1 |
| | | CHECKED BY: | UNIT: mm | DESCRIPTION: TFT MODULE |
| VER. 01 | FIRST ISSUE | RITA 2017.05.17 | APPROVED BY: | VERSION NO: 01 |
| VER. | REVISED DESCRIPTION | REVISER | DATE | |