

PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	VDD
2	VDD
3	GND
4	SEL
5	RINO-
6	RINO+
7	GND
8	RIN1-
9	RIN1+
10	GND
11	RIN2-
12	RIN2+
13	GND
14	CLKIN-
15	CLKIN+
16	GND
17	RIN3-
18	RIN3+
19	NC
20	NC/GND




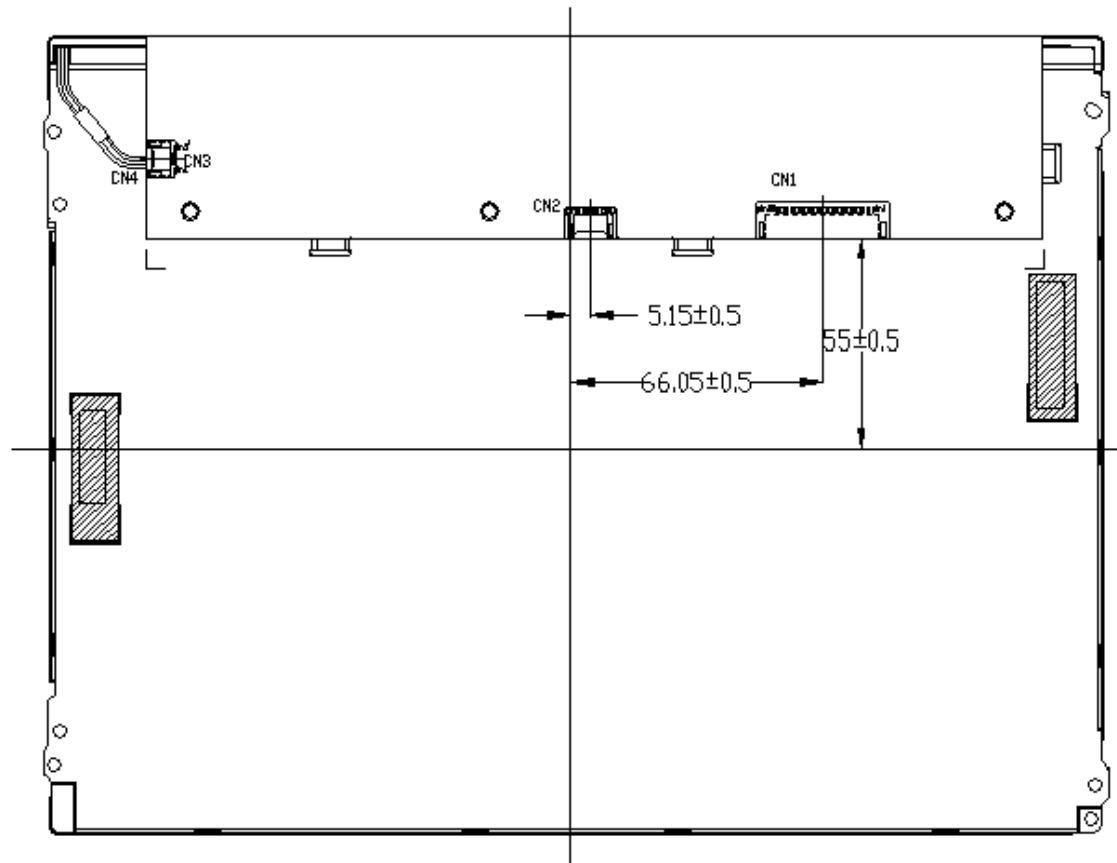
PIN DESCRIPTION FOR LED	
PIN	SYMBOL
1	NC
2	PWM
3	EN
4	GND
5	VLED

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: 12 O'CLOCK
4. DRIVER IC: -
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED
8. SURFACE LUMINANCE: 400CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: GLARE
10. GENERAL TOLERANCE: ±0.3MM
11. ROHS COMPLIANT

 MULTI-INNO TECHNOLOGY CO., LTD.

02	ADD THE INTERFACE DEFINITION OF LED	CAROL	2021.07.21	CHECKED BY:	RITA	2021.01.18		MODULE P/N:	MI1210WT-1
01	FIRST ISSUE	RITA	2021.01.18	APPROVED BY:			SCALE : 1/1	DESCRIPTION:	TFT MODULE
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO.:	02		UNIT: mm	SHEET NO.:	1/2



MULTI-INNO TECHNOLOGY CO., LTD.

02	ADD THE INTERFACE DEFINITION OF LED	CAROL	2021.07.21	DRAWN BY:	RITA	2021.01.18		MODULE P/N:	MI1210WT-1
01	FIRST ISSUE	RITA	2021.01.18	CHECKED BY:			SCALE :	1/1	
VER.	REVISED DESCRIPTION	REVISER	DATE	APPROVED BY:			UNIT:	mm	DESCRIPTION:
				VERSION NO.:	02		SHEET NO.:	2/2	TFT MODULE