



PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	RX3+
2	RX3-
3	BIST
4	SEL6/8
5	GND
6	RXC+
7	RXC-
8	GND
9	RX2+
10	RX2-
11	GND
12	RX1+
13	RX1-
14	GND
15	RX0+
16	RX0-
17	REL R
18	REUD
19	VCC
20	VCC

PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	V _i
2	V _i
3	V _i
4	V _i
5	VGND
6	VGND
7	VGND
8	VGND
9	EN
10	ADJ

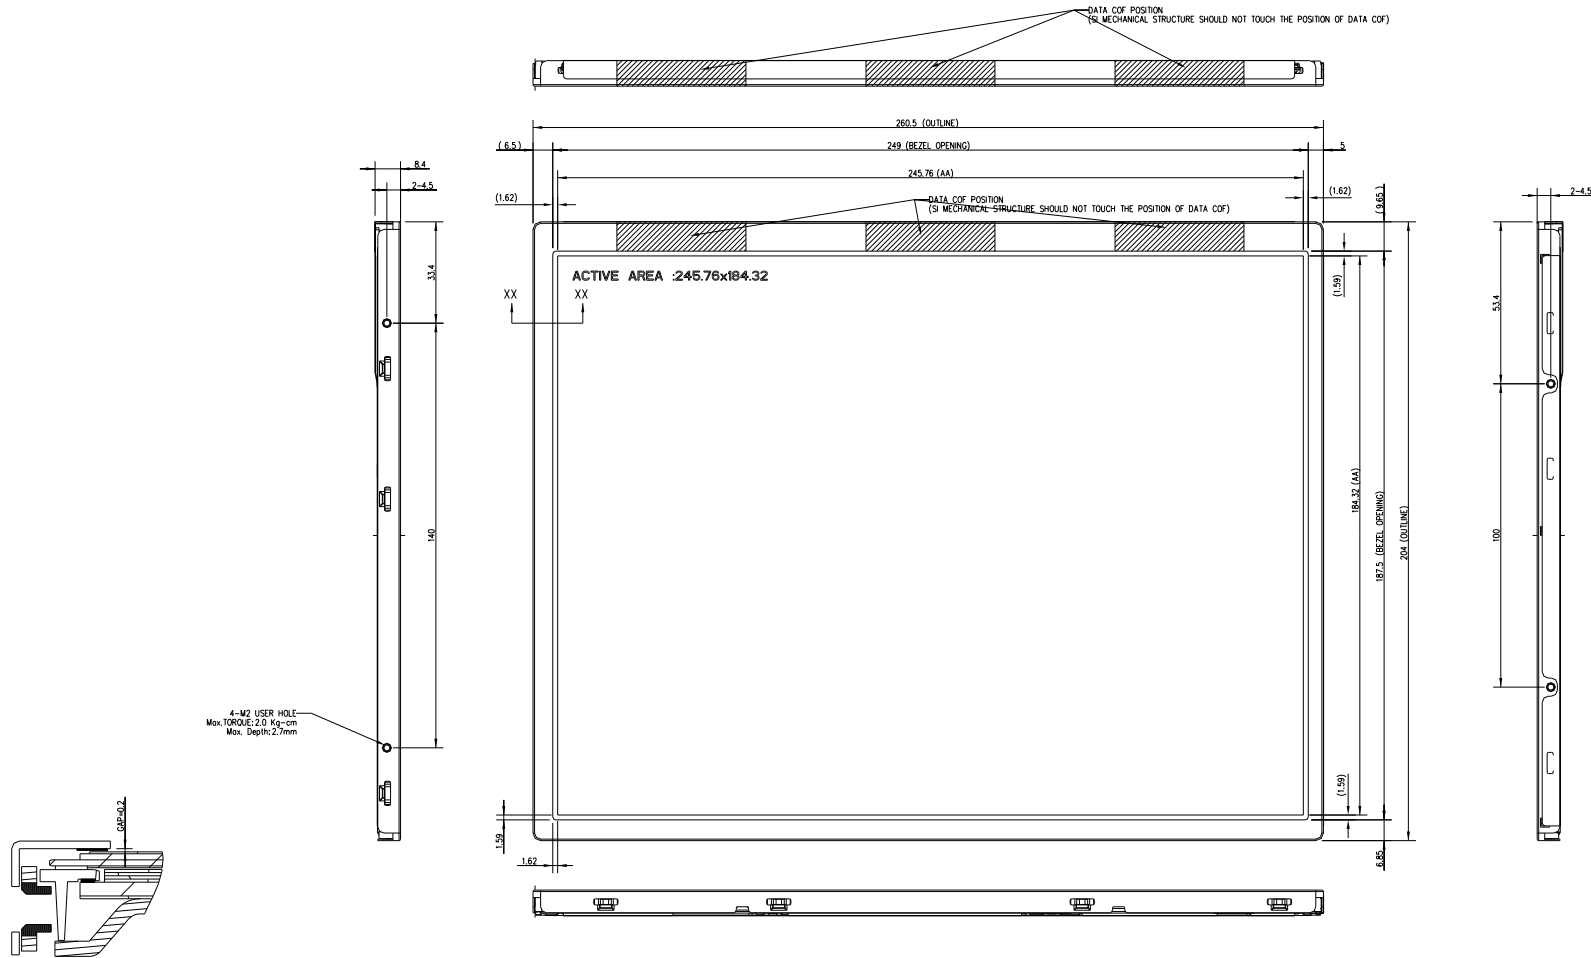

SECTION XX-XX
SCALE 5:1




NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: -
5. OPERATING TEMP.: -30°C ~ 85°C
6. STORAGE TEMP.: -40°C ~ 90°C
7. LED BACKLIGHT: LED, BUILT-IN BACKLIGHT DEIVE: V_i=12.0V
8. TOP POLARIZER SURFACE TREATMENT: HARD COATING (3H), ANTI-GLARE
9. SURFACE LUMINANCE: 600CD/M² (TYP.)
9. CONNECTOR TYPE:
CN1: STARCONN 076820-0048RA-G4 OR EQUIVALENT
CN2: ACES 91208-01001-H01 OR EQUIVALENT
10. WITH UPPER&BOTTOM METAL FRAME (TBD)
11. GENERAL TOLERANCE: ±0.5MM
12. ROHS COMPLIANT

Mit MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2021.05.08		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1210YT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

02	CORRECT THE TEMPERATURE OF OPERATING AND STORAGE.	CAROL	2021.03.12
01	FIRST ISSUE	CAROL	2021.05.08
VER.	REVISED DESCRIPTION	REVISER	DATE

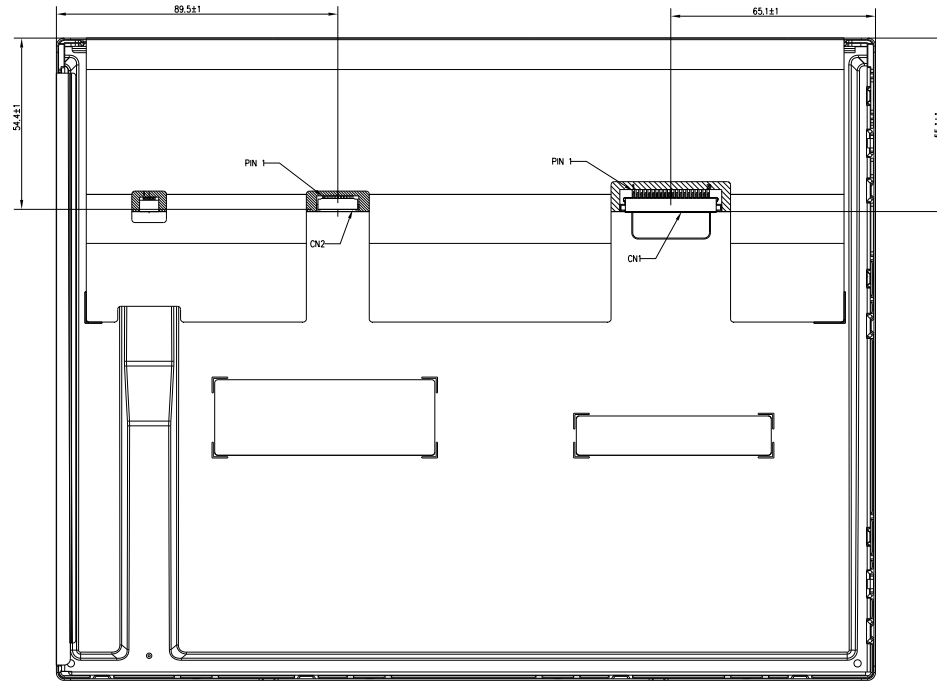

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:		CAROL	2021.05.08		MODULE P/N:
CHECKED BY:					SCALE : 1/1
APPROVED BY:				UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	TFT MODULE
02	CORRECT THE TEMPERATURE OF OPERATING AND STORAGE.	CAROL	2021.03.12		
01	FIRST ISSUE	CAROL	2021.05.08		
				SHEET No.: 2/2	