



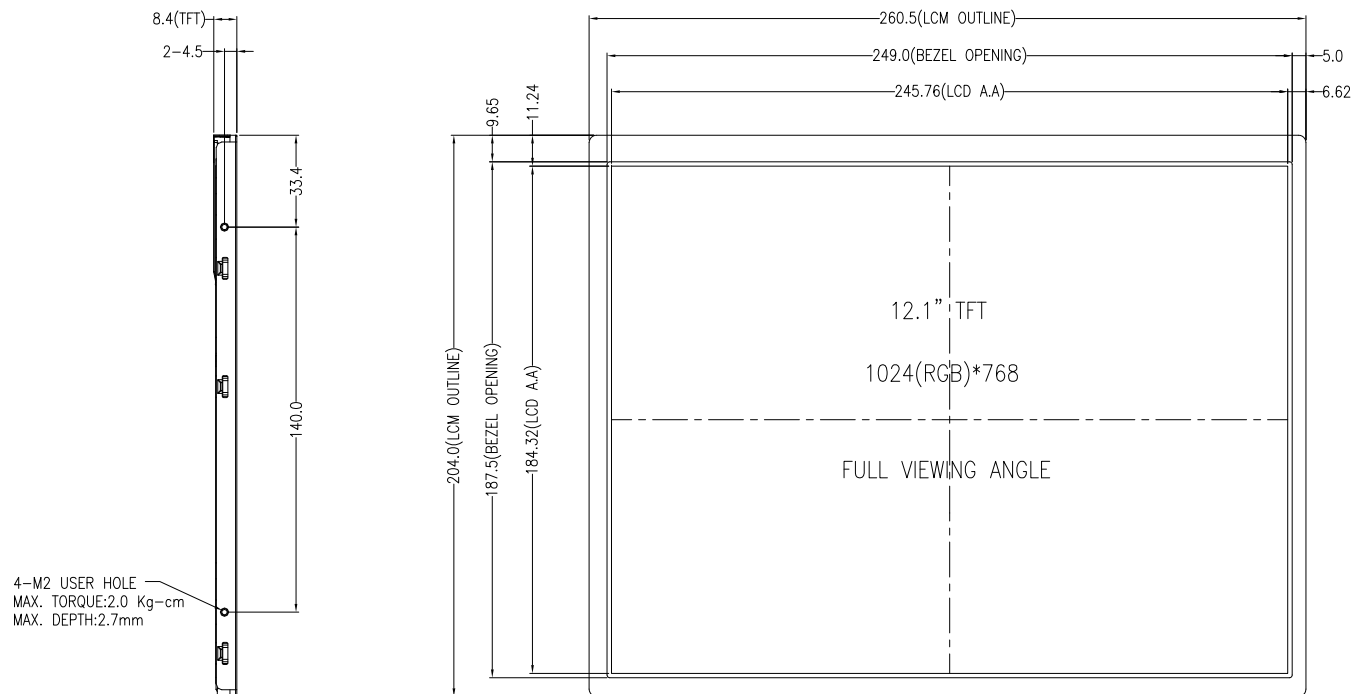

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: -
5. OPERATING TEMP.: -30°C ~ 75°C
6. STORAGE TEMP.: -40°C ~ 80°C
7. LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: Vi=12V (TYP.)
8. SURFACE LUMINANCE: 800 CD/M² (TYP.) Δ
9. TOP POLARIZER SURFACE TREATMENT: HARD COATING (3H), ANTI-GLARE
10. CONNECTOR TYPE:
CN1: STARCONN 076820-0048RA-G4 OR EQUIVALENT
CN2: ACES 91208-01001-H01 OR EQUIVALENT
11. GENERAL TOLERANCE: $\pm 0.5\text{MM}$
12. ROHS COMPLIANT



PIXEL DETAIL
(SCALE 100:1)

PIN ASSIGNMENT FOR CN1	
PIN	SYMBOL
1	RX3+
2	RX3-
3	NC
4	SEL68
5	GND
6	RXC+
7	RXC-
8	GND
9	RX2+
10	RX2-
11	NC
12	RX1+
13	RX1-
14	NC
15	RX0+
16	RX0-
17	RELR
18	REUD
19	VCC
20	VCC


PIN ASSIGNMENT FOR CN2	
PIN	SYMBOL
1	Vi
2	Vi
3	Vi
4	Vi
5	VGND
6	VGND
7	VGND
8	VGND
9	EN
10	ADJ



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2021.04.13		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1210YT-2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	02		SHEET NO.: 1/2	TFT MODULE

02	CHANGE THE SURFACE LUMINANCE	RITA	2023.10.23
01	FIRST ISSUE	CAROL	2021.04.13
VER.	REVISED DESCRIPTION	REVISER	DATE

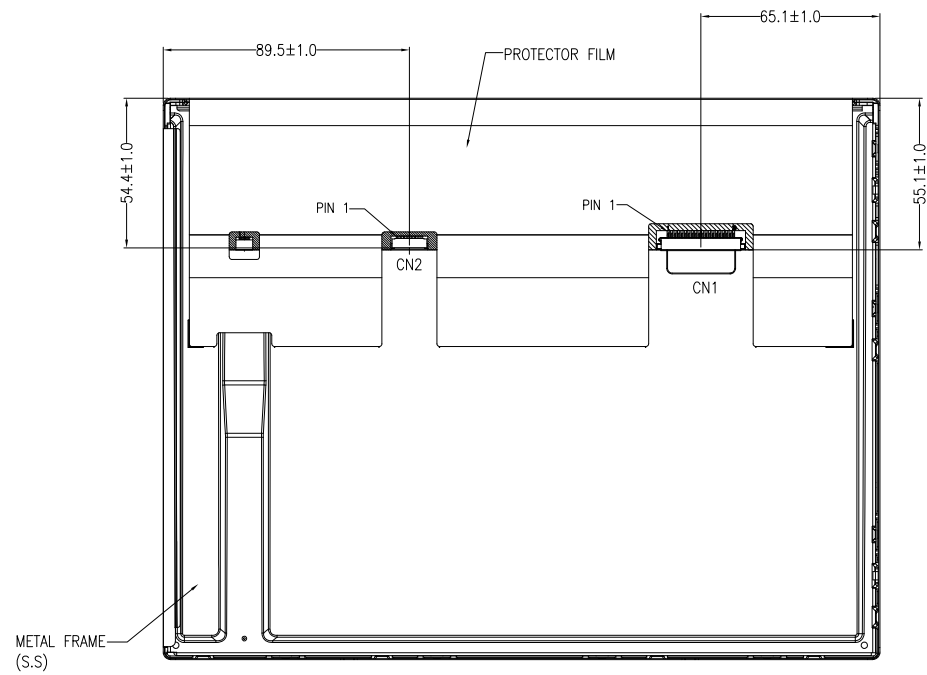

MULTI-INNO TECHNOLOGY CO., LTD.

02	CHANGE THE SURFACE LUMINANCE	RITA	2023.10.23	DRAWN BY:	CAROL	2021.04.13		MODULE P/N:
01	FIRST ISSUE	CAROL	2021.04.13	CHECKED BY:			SCALE : 1/1	MI1210YT-2
VER.	REVISED DESCRIPTION	REVISER	DATE	APPROVED BY:			UNIT: mm	DESCRIPTION:
				VERSION NO:	02		SHEET NO.: 2/2	TFT MODULE